



1990-C MECH-2

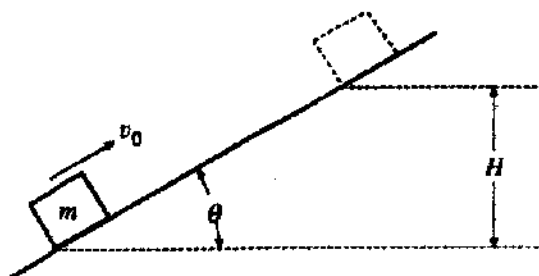


Mech. 2. A block of mass m slides up the incline shown above with an initial speed v_0 in the position shown.

- (a) If the incline is frictionless, determine the maximum height H to which the block will rise, in terms of the given quantities and appropriate constants.
- (b) If the incline is rough with coefficient of sliding friction μ , determine the maximum height to which the block will rise in terms of H and the given quantities.

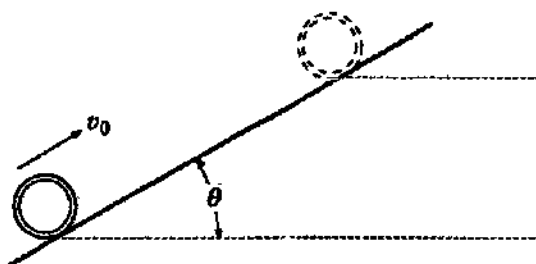

A thin hoop of mass m and radius R moves up the incline shown above with an initial speed v_0 in the position shown.

- (c) If the incline is rough and the hoop rolls up the incline without slipping, determine the maximum height to which the hoop will rise in terms of H and the given quantities.
- (d) If the incline is frictionless, determine the maximum height to which the hoop will rise in terms of H and the given quantities.

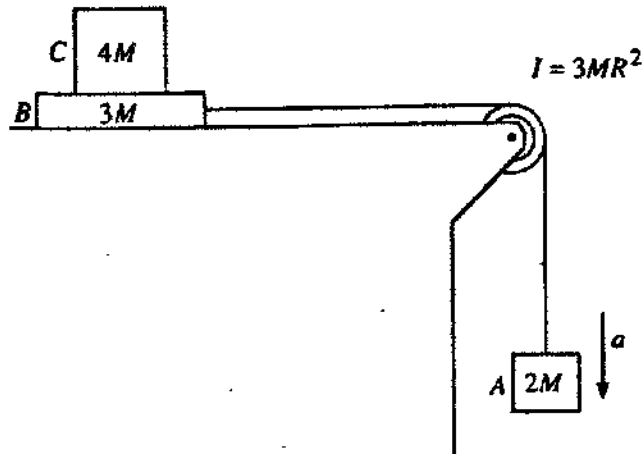

Block A of mass $2M$ hangs from a cord that passes over a pulley and is connected to block B of mass $3M$ that is free to move on a frictionless horizontal surface, as shown above. The pulley is a disk with frictionless bearings, having a radius R and moment of inertia $3MR^2$. Block C of mass $4M$ is on top of block B . The surface between blocks B and C is NOT frictionless. Shortly after the system is released from rest, block A moves with a downward acceleration a , and the two blocks on the table move relative to each other.

In terms of M , g , and a , determine the

- (a) tension T_v in the vertical section of the cord
- (b) tension T_h in the horizontal section of the cord

If $a = 2$ meters per second squared, determine the


- (c) coefficient of kinetic friction between blocks B and C
- (d) acceleration of block C

a) $KE \rightarrow GPE$

$$\frac{1}{2}mv_0^2 = mgh$$

$$H = \frac{v_0^2}{2g}$$

KEY

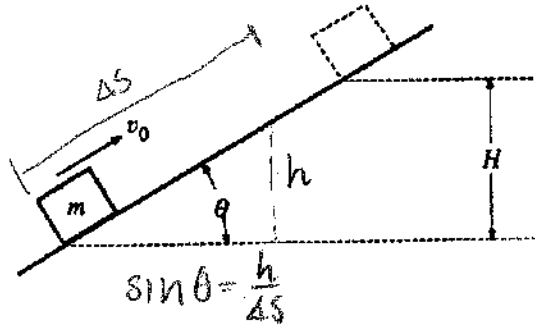

1990-C MECH-2

b) $KE - W_f = GPE$

$$W_f = F_f \Delta s = \mu mg \cos \theta \cdot \frac{h}{\sin \theta}$$


Mech. 2. A block of mass m slides up the incline shown above with an initial speed v_0 in the position shown.

- (a) If the incline is frictionless, determine the maximum height H to which the block will rise, in terms of the given quantities and appropriate constants.
(b) If the incline is rough with coefficient of sliding friction μ , determine the maximum height to which the block will rise in terms of H and the given quantities.

$$\frac{1}{2}mv_0^2 - \mu mg \cot \theta \cdot h = mgh$$

$$\frac{1}{2}v_0^2 = \mu g \cot \theta \cdot h + gh$$

$$h = \frac{\frac{1}{2}v_0^2}{\mu g \cot \theta + g}$$

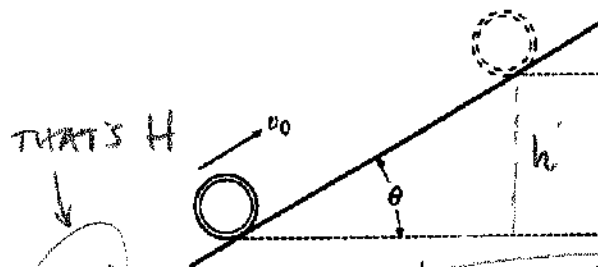

so $h = \frac{v_0^2}{2g(\mu \cot \theta + 1)} \therefore h = \frac{H}{\mu \cot \theta + 1}$

A thin hoop of mass m and radius R moves up the incline shown above with an initial speed v_0 in the position shown.

- (c) If the incline is rough and the hoop rolls up the incline without slipping, determine the maximum height to which the hoop will rise in terms of H and the given quantities.
(d) If the incline is frictionless, determine the maximum height to which the hoop will rise in terms of H and the given quantities.

c) $(KE_{\text{trans}} + KE_{\text{rot}}) \rightarrow GPE$

$$\frac{1}{2}mv_0^2 + \frac{1}{2}(mR^2)\left(\frac{v_0^2}{R^2}\right) = mgh$$

$$mv_0^2 = mgh$$

$$h = \frac{v_0^2}{g} = 2H$$

d) w/o F_f ON INCLINE, THERE IS NO LOSS OF KE_{rot} AS HOOP GOES UP INCLINE

$$\therefore KE_{\text{trans}} \rightarrow GPE$$

$$\frac{1}{2}mv_0^2 = mgh$$

$$h = \frac{v_0^2}{2g} = H \quad \text{SAME AS (a)}$$

$$a) \Sigma F: 2Mg - T_v = 2Ma \rightarrow T_v = 2M(g - a) \quad \text{"GIVEN"}$$

$$b) \Sigma \tau: T_v R - T_h R = I\alpha = 3MR^2 \left(\frac{a}{R}\right)$$


1989-C MECH-2

$$T_v - T_h = 3Ma$$

$$T_h = T_v - 3Ma$$

$$= 2Mg - 2Ma - 3Ma$$

$$T_h = 2Mg - 5Ma$$

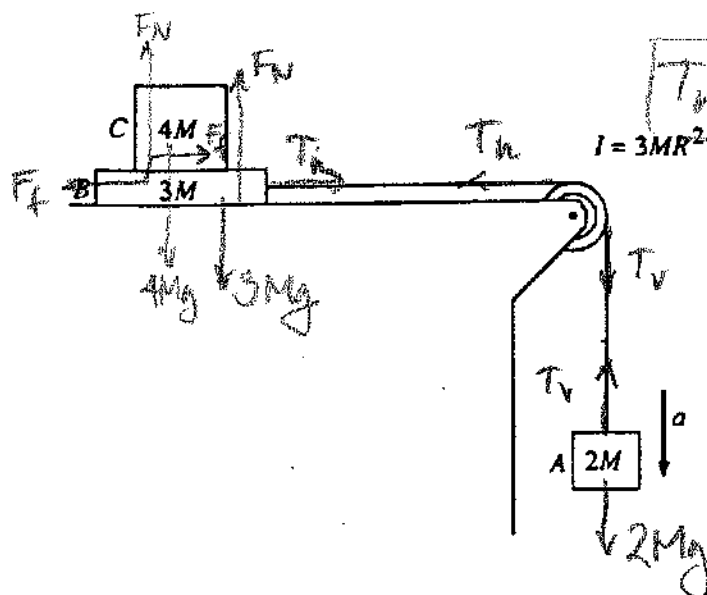

Block A of mass $2M$ hangs from a cord that passes over a pulley and is connected to block B of mass $3M$ that is free to move on a frictionless horizontal surface, as shown above. The pulley is a disk with frictionless bearings, having a radius R and moment of inertia $3MR^2$. Block C of mass $4M$ is on top of block B. The surface between blocks B and C is NOT frictionless. Shortly after the system is released from rest, block A moves with a downward acceleration a , and the two blocks on the table move relative to each other.

In terms of M , g , and a , determine the

- (a) tension T_v in the vertical section of the cord
- (b) tension T_h in the horizontal section of the cord

If $a = 2$ meters per second squared, determine the

- (c) coefficient of kinetic friction between blocks B and C
- (d) acceleration of block C

c) BOX C WILL ACCEL TO RIGHT DUE TO F_f B/W BOXES $\neq a_{sys}$

$$\Sigma F_B: T_h - F_f = 3Ma$$

$$T_h - \mu F_N = 3Ma$$

B/W BLOCKS
WHICH = $4Mg$

$$T_h = \mu 4Mg = 3Ma$$

$$2Mg - 5Ma - \mu 4Mg = 3Ma$$

$$\mu = \frac{2g - 8a}{4g} = 0.1$$

$$d) \Sigma F_C: F_f = 4Ma_{block C}$$

$$4\mu Mg = 4Ma_{block C}$$

$$a = \mu g = 1m/s^2$$

SUB-IN
FROM
(b)