



# **Technology User Guide**

## **Volume III: Configuring Devices for Testing**

### **South Carolina**

Data Recognition Corporation (DRC)  
13490 Bass Lake Road  
Maple Grove, MN 55311

Toll Free: 1-800-451-7834  
eDIRECT: <https://sc.drcedirect.com>  
Email: [SCProject@datarecognitioncorp.com](mailto:SCProject@datarecognitioncorp.com)  
Revision Date: October 17, 2017

## COPYRIGHT

Copyright © 2017 Data Recognition Corporation

The following items in DRC INSIGHT are protected by copyright law:

- The User Guide.
- All text and titles on the software's entry and display, including the look and feel of the interaction of the windows, supporting menus, pop-up windows, and layout.

DRC INSIGHT Online Learning System and DRC eDIRECT are trademarked by Data Recognition Corporation.

Any individuals or corporations who violate these copyrights and trademarks will be prosecuted under both criminal and civil laws, and any resulting products will be required to be withdrawn from the marketplace.

The following are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries:

Internet Explorer  
Microsoft  
Windows  
Windows Vista  
Windows XP  
Windows 7  
Windows 8  
Windows 10

The following are trademarks or registered trademarks of Apple Corporation in the United States and/or other countries:

Apple  
Macintosh  
Mac  
OS X and macOS  
iPad  
iOS\*  
\*iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.  
Safari

The following are trademarks or registered trademarks of Google Corporation in the United States and/or other countries.

Android  
Chrome  
Chromebook  
Google Play

The following is a trademark or registered trademark of Mozilla Corporation in the United States and/or other countries.

Firefox

## ■ Introduction

## ■ The Central Office Services - Device Toolkit Dashboard

## ■ Configuring Devices For Testing

|   |    |
|---|----|
| About This Guide.....   | 5  |
| COS - Device Toolkit Overview.....                                    | 5  |
| Central Office Services Software.....                                 | 6  |
| COS Icon.....   | 6  |
| Introduction.....   | 8  |
| Navigating the COS - Device Toolkit Dashboard.....                    | 9  |
| Overview of Configuring INSIGHT .....                                 | 17 |
| Web Browsers and the COS - Device Toolkit.....                        | 17 |
| COS - Device Toolkit Deployment Files and Silent Installation .....   | 17 |
| Setting Up INSIGHT on PCs, Mac, and Linux Testing Devices .....       | 19 |
| Setting Up INSIGHT on iPad Testing Devices.....                       | 19 |
| Setting Up INSIGHT on Chromebook Testing Devices .....                | 20 |
| Configuring and Installing INSIGHT with a TSM .....                   | 21 |
| TSM Considerations .....  | 21 |
| Installing Multiple TSMs and INSIGHT .....                            | 22 |
| Starting the COS - Device Toolkit and Displaying a Configuration..... | 23 |
| Creating Configurations.....  | 26 |
| Working with Configuration Information .....                          | 30 |
| Working with Locations.....   | 31 |
| Working with Content Management.....                                  | 34 |
| Working with Content Hosting .....                                    | 35 |
| Working with Service Devices.....                                     | 36 |
| Creating Configuration Files for Multiple Testing Programs .....      | 37 |
| Deployment Files, Configurations, and the TSM .....                   | 38 |
| Creating Deployment Files for Testing Devices .....                   | 39 |
| Working with Testing Devices.....                                     | 41 |
| Moving, Removing, and Reloading Testing Devices .....                 | 42 |
| Moving Testing Devices between Districts and/or Schools.....          | 44 |
| Adding Testing Devices by Device ID .....                             | 48 |
| Viewing Testing Device Log Files.....                                 | 49 |
| Deleting Configurations .....   | 50 |

# Introduction




## ■ About This Guide

### □ Important Information

## ■ COS - Device Toolkit Overview

This user guide is part of a multi-volume set that describes how to configure, install, manage, and troubleshoot the DRC INSIGHT Online Learning System, or DRC INSIGHT. This volume, *Volume III: Configuring Devices for Testing*, provides detailed information about configuring devices using the Central Office Services - Device Toolkit (referred to as the COS - Device Toolkit in this user guide). It describes the COS - Device Toolkit and the role it plays in configuring devices for testing. It describes the various tasks you can perform using the COS - Device Toolkit, including how to organize, configure, and manage your testing devices for testing with DRC INSIGHT.

.....  
 **Important:** Throughout this user guide, the Important icon indicates important information or crucial tips.  
.....

You use the COS - Device Toolkit to organize, configure, and manage your testing devices. Within the COS - Device Toolkit, you create configurations, a logical grouping of devices usually consisting of one or more Testing Site Managers (TSMs) and multiple testing devices. A configuration allows you to group testing devices and TSMs and easily specify settings for all the devices in the configuration.

Each testing device can belong to only one configuration. The COS - Device Toolkit tracks and manages the testing devices within the configuration by using a unique DRC Device ID that the COS - Device Toolkit creates. You can use the COS - Device Toolkit to move a testing device from one configuration to another or to delete a testing device from the COS - Device Toolkit.

In addition to testing devices, you can configure TSMs as part of a configuration for content caching and/or response caching. You also can specify a load simulation server, the port used for communication, the location of a proxy host, and indicate whether to turn automatic software updates for DRC INSIGHT software off or on.

### ■ COS - Device Toolkit Overview (cont.)

### □ Central Office Services Software


### □ COS Icon

After you have installed your TSMs, you use the COS - Device Toolkit to perform the following tasks:

1. Set up configurations.
2. Associate TSMs with configurations.
3. Organize testing devices by configuration.
4. Deploy configurations to testing devices.
5. Register the testing device with a configuration after you install and start INSIGHT on the testing device.

The COS - Device Toolkit integrates the new Central Office Services interface with the legacy Device Toolkit as part of the transition from the legacy Device Toolkit and TSM software to the complete Central Office Services software. For more details about the transition to Central Office Services, refer to the *Central Office Services (COS) - Device Toolkit Transition Guide*.

**! Important:** Current Device Toolkit users will notice some differences in the COS - Device Toolkit interface, but there is no need to install additional software or make changes to your existing configurations to transition to this interface. The new interface is available when you click **Device Toolkit** in eDIRECT.

 **Central Office Services:** At various locations throughout this volume, the COS icon is displayed. It indicates functionality that is part of the Central Office Services interface but is unavailable for the COS - Device Toolkit interface, either because it requires the Central Office Services software to be installed or because it is not compatible with TSM software.


# **The Central Office Services - Device Toolkit Dashboard**



## ■ Introduction

The Central Office Services (COS) - Device Toolkit interface consists of two tabs—Configurations and Add New Configuration.

- The Configurations tab displays a visual dashboard describing the configurations that currently exist in the COS - Device Toolkit, status information about each configuration, and the testing devices associated with each configuration. From this tab, you can drill down into a configuration to manage the configuration and its associated devices.

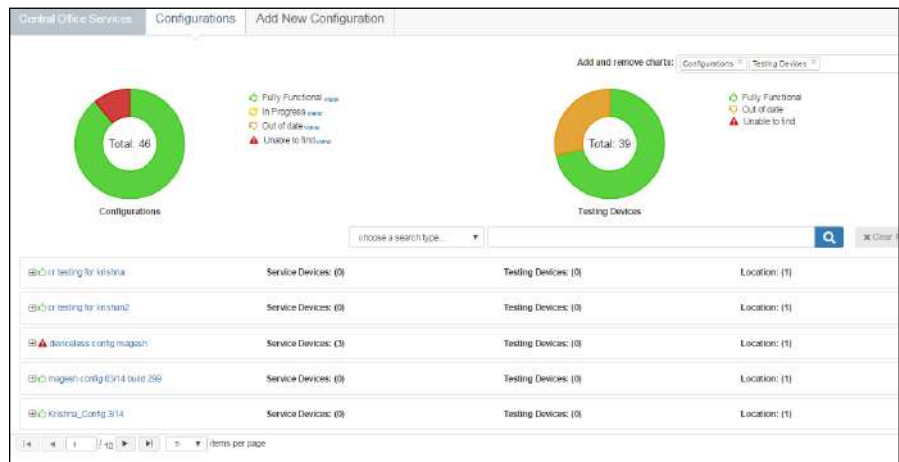

- The Add New Configuration tab helps you quickly create a new configuration.


The screenshot shows the 'Add New Configuration' tab in the Central Office Services - Device Toolkit interface. It features a 'Configure Central Office Service' section with a 'Previous' button, a progress indicator (1), and a 'Next' button. Below this is a 'Configuration Information' section with a text input field for 'Configuration Name (required)'. There is also a 'Testing Devices Configuration' section with a checkbox for 'Enable Auto Updates' and a 'Privacy Policy' section with a text input field for 'Privacy Policy'.

This section describes the COS - Device Toolkit dashboard that appears in the Configurations tab. Using the dashboard, you can review, monitor, and manage your configurations, TSMs, and testing devices from a central location.



## Navigating the COS - Device Toolkit Dashboard


From the Configurations tab, select a testing program and a site from the drop-down menus to display the COS - Device Toolkit dashboard. When the dashboard first appears, two “donut” charts—Configurations and Testing Devices—display at the top. A third chart, Service Devices, is also available. You can toggle the dashboard to display any combination of these three charts.

 **Central Office Services:** Service device functionality is part of the Central Office Services interface and is unavailable for the COS - Device Toolkit. In some locations within the interface, TSM options replace service device options.




1. To start the COS - Device Toolkit and display its dashboard, sign on to eDIRECT, open the **All Applications** menu, and click **Device Toolkit**.

**Note:** You must have the Device Toolkit permission in eDIRECT to have access to this link.

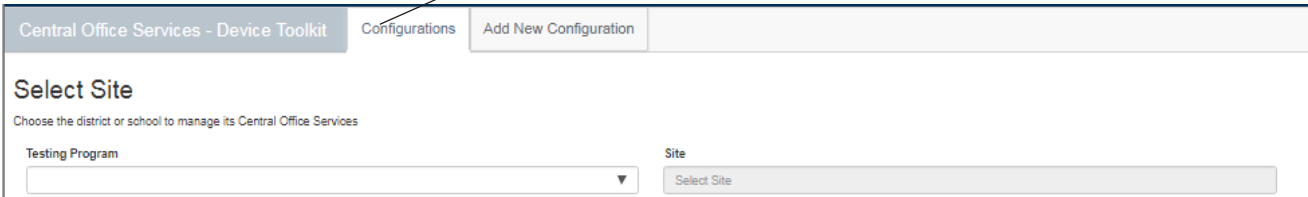

2. From the Configurations tab, when you select a testing program from the drop-down menu, and search for and select a site (district or school) in the Site field by typing three or more letters of the site’s name, the COS - Device Toolkit dashboard displays the configurations and testing devices that you can access.

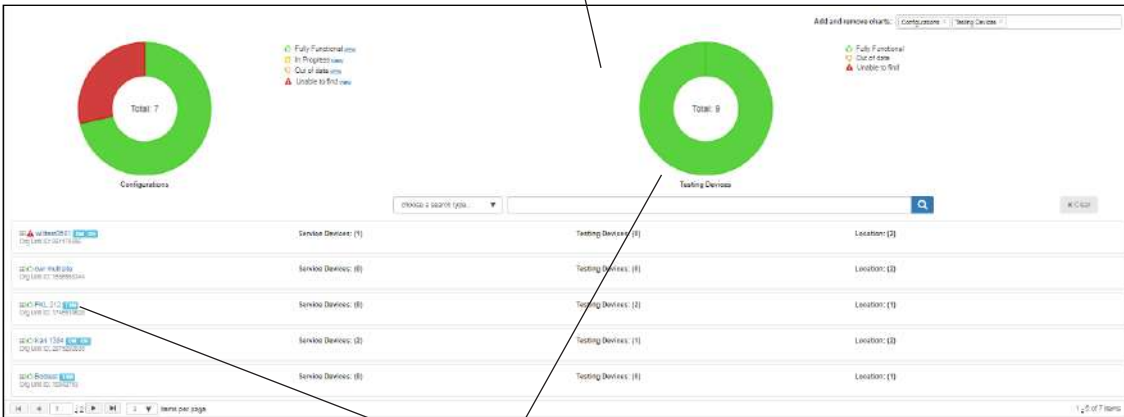





The **Add and remove charts** tabs indicate the graphical donut charts currently displayed in the dashboard. The default is to display the Configurations and Testing Devices charts. Your configurations are listed below the donut charts, and you can click a configuration name to view or manage the configuration.

### ***Navigating the COS - Device Toolkit Dashboard (cont.)***


Within a donut chart, you can hover your mouse over a color to display the number of configurations or devices that have a particular status. Clicking the text in the legend to the right of a donut chart displays a definition of the status. The grids below list the colors and corresponding icons that appear in each legend (and elsewhere in the dashboard). They also list the corresponding status and provide a brief description of each status.

**Note:** The statuses for the Configurations chart are different from the statuses for the Testing Devices chart.

#### **Configurations Chart**




| Chart Color | Icon  | Configuration Status | Description   |
|-------------|---|----------------------|---|
| Green       |  | Fully Functional     | All TSM and testing devices using a configuration are visible to the COS - Device Toolkit and are either in use or ready for use. |
| Orange      |  | Out of date          | NA  |
| Yellow      |  | In Progress          | NA  |
| Red         |  | Unable to find       | Configured services have not been seen for at least an hour.  |

---

 **Central Office Services:** The **In Progress** and **Out of date** status icons do not apply to configurations that use a TSM in the COS - Device Toolkit. To determine the status of a TSM, refer to the TSM interface information (see *Volume II: Testing Site Manager [TSM]*).


---

#### **Testing Devices Chart**

| Chart Color | Icon  | Testing Device Status | Description   |
|-------------|---|-----------------------|---|
| Green       |  | Fully Functional      | Testing device last seen within a month               |
| Red         |  | Unable to find        | Testing device has not been seen for at least a year. |
| Orange      |  | Out of date           | Testing device has not been seen for at least a month |

## Navigating the COS - Device Toolkit Dashboard (cont.)


When you hover over a color in a donut chart, informational text appears based on the color of the chart.

 **Central Office Services:** The **In Progress** and **Out of Date** status icons will not appear in configurations that use a TSM in the COS - Device Toolkit. To determine the status of a TSM, refer to the TSM interface information (see *Volume II: Testing Site Manager [TSM]*)

### Configurations Chart

Red area text displays “**Unable to find: x,**” where x is the number of missing configurations.

Orange area text displays “**Out of date: x,**” where x is the number of configurations that are out of date.

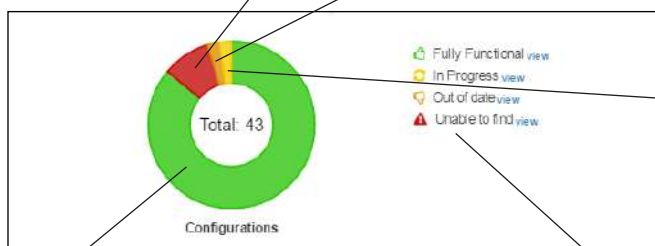

Yellow area text displays “**In Progress Upload/Download: x,**” where x is the number of configurations uploading or downloading.


Green area text displays “**Fully Functional: x,**” where x is the number of fully functional configurations.

The four status icons are listed to the right of the Configurations chart. Click **view** to the right of a status icon to filter the list, starting with the status you selected. Click a status name to display a definition of the status.

### Testing Devices Chart

Orange area text displays “**Out of date: x,**” where x is the number of testing devices with content that is out of date.

Red area text displays “**Unable to find: x,**” where x is the number of missing testing devices.

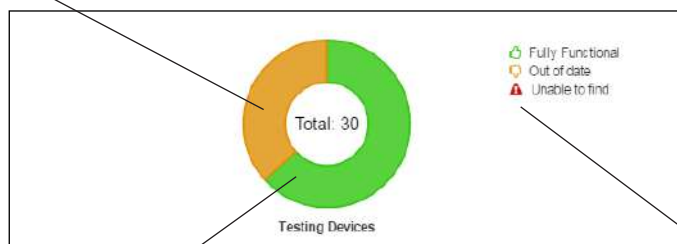


Green area text displays “**Fully Functional: x,**” where x is the number of fully functional testing devices.

The three status icons are listed to the right of the Testing Devices chart. Click on a status name to display a definition of the status.





## Navigating the COS - Device Toolkit Dashboard (cont.)


The Configurations tab displays all the configurations that match your search criteria. When you click the plus sign icon (+), the locations where the configuration and associated devices are registered are also displayed.

**Note:** The new ORG Unit ID is always displayed.

 **Central Office Services:** The **In Progress** and **Out of date** status icons do not apply to configurations that use a TSM in the COS - Device Toolkit. To determine the status of a TSM, refer to the TSM interface information (see *Volume II: Testing Site Manager [TSM]*)

The icon to the left of the configuration name indicates the current overall status of the TSMs in the configuration.

| Icon   | Description   |
|--|---|
| Fully Functional (  ) | Test content for all administrations is up to date on all TSMs, and the configured services on all TSMs are functional. |
| In Progress (  )      | NA  |
| Out of Date (  )     | NA  |
| Unable to find (  ) | One or more TSMs in the configuration has not been “seen” in the last hour by the COS - Device Toolkit.                 |

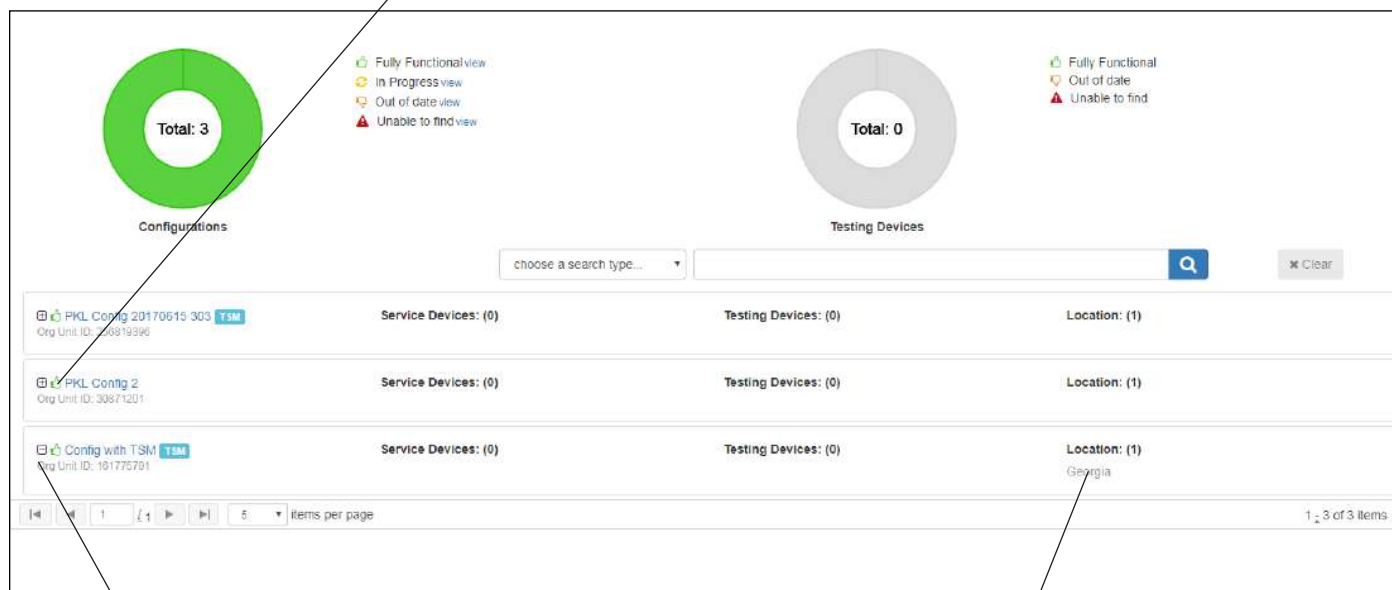


The screenshot shows the COS - Device Toolkit Dashboard. At the top, there are two donut charts: 'Configurations' with a total of 3 (all green) and 'Testing Devices' with a total of 0 (all grey). Below the charts is a table of configurations. The first configuration is 'PKL Config 20170615 303' with Org Unit ID 30919396, showing 0 Service Devices, 0 Testing Devices, and 1 Location. The second is 'PKL Config 2' with Org Unit ID 30871201, showing 0 Service Devices, 0 Testing Devices, and 1 Location. The third is 'Config with TSM' with Org Unit ID 161775791, showing 0 Service Devices, 0 Testing Devices, and 1 Location (Georgia). A search bar and a 'Clear' button are also visible.

Click the plus (+) sign icon (toggles to a minus [-] sign icon) to display location information about the configuration, including all of the locations where the configuration's devices are registered.

For configurations with TSMs, the configured locations are displayed here.

## Navigating the COS - Device Toolkit Dashboard (cont.)

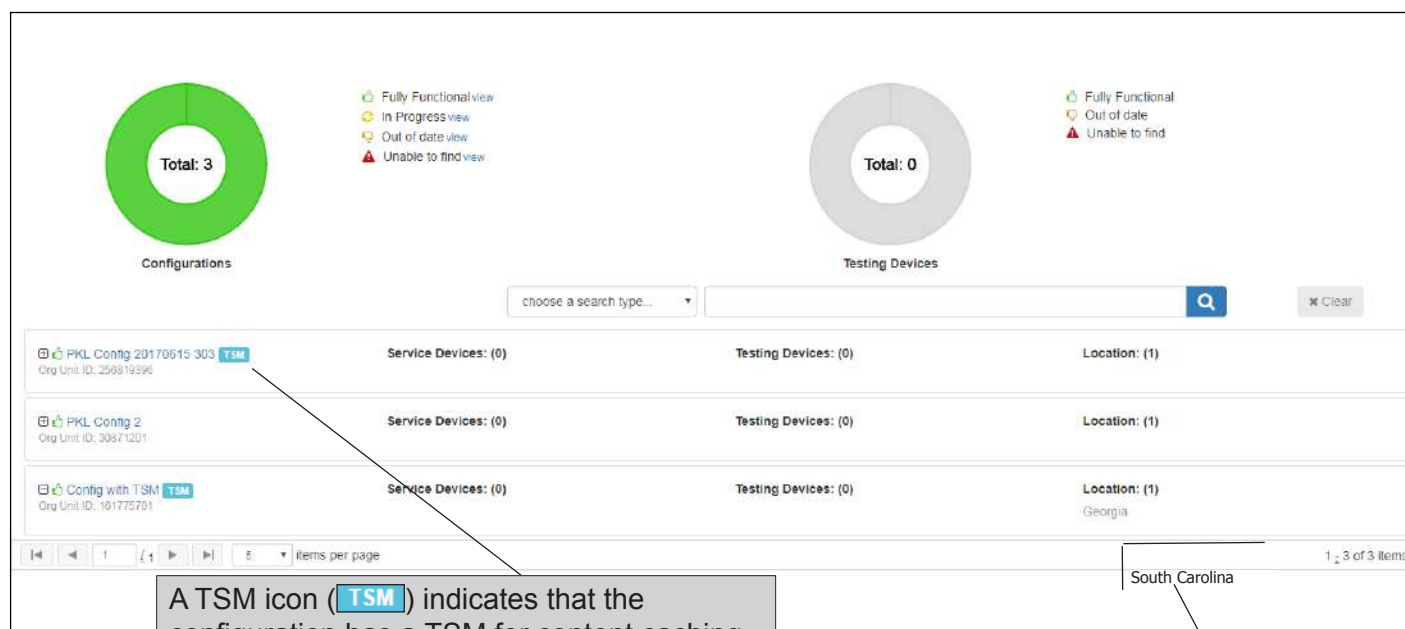

A TSM icon ( **TSM** ) indicates that the configuration has a TSM for content caching.

South Carolina

The title of the assessments and administrations that were selected in the configuration is listed.

**Note:** If Response Caching is enabled for the configuration, a capitol letter **R** displays.

## Navigating the COS - Device Toolkit Dashboard (cont.)

When there are more configurations than can be shown on a single page, the COS - Device Toolkit allows you to page through the configurations. There are multiple ways to navigate the dashboard configuration pages, as shown below.

Enter a number in the selected page box to jump directly to a certain page.

Specify the number of configurations to display on a page by using the items per page drop-down menu.

The screenshot displays the COS - Device Toolkit Dashboard. On the left, a green donut chart labeled 'Configurations' shows 'Total: 3'. On the right, a grey donut chart labeled 'Testing Devices' shows 'Total: 0'. Below these are two tables. The left table lists configurations with columns for Configuration Name, Service Devices, and Location. The right table lists testing devices with columns for Testing Devices and Location. A search bar is located above the right table. A dropdown menu is open, showing search types: Configuration Name, Service Device ID, Service Device Internal IP, Testing Device ID, and Testing Device Internal IP. Navigation arrows and a page number box are at the bottom left.

Navigate through the list one page at a time by clicking the **Page forward** (▶) and **Page back** (◀) arrows.

Click the **Page to first** (◀◀) or **Page to last** (▶▶) arrows to go to the first or last page.

To refine your search criteria, choose a search type—Configuration Name, Service Device ID, Service Device Internal IP, Testing Device ID, or Testing Device IP Address—enter your search values, and click the Search icon (🔍). You can click **Clear** at any time to clear your search results and return to the original display.

### Notes:

- The search values you enter for a Configuration Name search do not have to be the first values in the string for which you are searching. The search locates any string in the search type that contains the search values you specified.
- The minimum number of characters you must enter varies by search type and a reminder is displayed, if necessary, when you search.

 **Central Office Services:** The Service Device ID and Service Device Internal IP filters do not apply to configurations that use a TSM in the COS - Device Toolkit.

## Navigating the COS - Device Toolkit Dashboard (cont.)

Each row on a page displays a configuration name, with icons indicating the number of devices using the configuration and the number of locations configured. In addition, a TSM icon ( **TSM** ) indicates that there are one or more TSMs associated with the configuration.

|  |                      |                      |
|--|----------------------|----------------------|
| PKL Config 20170615 303 <b>TSM</b><br>Org Unit ID: 256819396 | Service Devices: (0) | Testing Devices: (0) |
| PKL Config 2<br>Org Unit ID: 30871201                        | Service Devices: (0) | Testing Devices: (0) |
| Config with TSM <b>TSM</b><br>Org Unit ID: 181775701         | Service Devices: (0) | Testing Devices: (0) |

Click the configuration name to display the configuration's details.

Central Office Services - Device Toolkit
Configurations
Add New Configuration

Configuration Information
Locations
Content Management
Content Hosting
Service Devices
Deployment
Testing Devices
Delete

### Config with TSM

Org Unit ID: 181775701  
Use the Org Unit ID when first starting your testing devices to register it to this configuration.

Once you have finished configuring this device, the configuration settings you have chosen will be saved. If other Central Office Service devices will need the same settings, you will be able to reuse this configuration for them as well. Please enter a name for this configuration. Try to use a name that will help you and others to select it in the future. Include your district and/or school in the name.

Configuration Name (required):

Testing Devices Configuration

Please update all of the information that applies to the testing devices associated with this configuration.

☒ Enable Auto Updates  
Allows testing devices to update automatically.

Proxy Host:   
Please enter a valid url to your http/https proxy which testing devices will use to communicate with the internet. Only needed when using a proxy server.

Proxy Path:

[Update Configuration](#)

# Configuring Devices for Testing





## ■ Overview of Configuring INSIGHT

The process of configuring INSIGHT on testing devices consists of two main parts:

1. Create or modify configurations using the COS - Device Toolkit and, if needed, move one or more testing devices to them.

.....  
**! Important:** You can use COS - Device Toolkit configurations for a combination of testing devices.  
.....

2. For silent installations, you can create a compressed deployment file (.zip) using the COS - Device Toolkit, download it, and use it to deploy INSIGHT to the testing devices that you configured. Alternatively, you can launch INSIGHT on a testing device and manually link it to a configuration.

## □ Web Browsers and the COS - Device Toolkit

The COS - Device Toolkit is available from the eDIRECT and is supported for the following web-browser versions.

| <u>Browser</u>    | <u>Version</u>                                       |
|-------------------|--|
| Internet Explorer | Version 10 or newer                                  |
| Chrome            | The most recent Google Chrome stable channel release |
| Mozilla Firefox   | Version 31 or newer                                  |

## □ COS - Device Toolkit Deployment Files and Silent Installation

You can use the COS - Device Toolkit to create a deployment file (.zip) containing configuration information for each testing device type (see the following page). To install INSIGHT on your testing devices silently, download the deployment file, extract the specific file(s) you need to install INSIGHT based on the type of testing devices you configured, and deploy the file(s) to these testing devices.

**Note:** As shown in the example below, silent installation commands are also available for Windows and Mac (OS X and macOS) in the desktop.txt file that is part of the configuration deployment file (.zip).

### Desktop Silent Install Commands

#### Windows

```
msiexec.exe /i DRC_INSIGHT_Setup.msi /qn /lv "install.log" HTTPS_PROXY="" OU_IDS="161775701"
```

#### Mac OSX

```
sudo ./drc_silent_install -o 161775701 -x ""
```

### ❑ Example Deployment File Templates

**! Important:** The code in the deployment files is meant as a rough template only. Depending on your Mobile Device Management (MDM) software, your configuration could be very different (see *Volume IV: DRC INSIGHT* for more information about the deployment files).

#### Chromeos.json

Contains configuration information for Chromebook testing devices (see the example below)

```
{“ouIds”:{“Value”:[“161775701”]}}
```

#### DRCCconfiguration.json

Contains configuration information for Windows, Mac, and Linux machines (see the example below)

```
{ “config”: { “httpsProxy”: “” }, “ouIds”: [ “161775701” ] }
```

#### ios.plist

Contains a silent installation command for iPad testing devices (see the example below)

```
<?xml version=“1.0” encoding=“UTF-8”?>
<!DOCTYPE plist PUBLIC “-//Apple//DTD PLIST 1.0//EN” “http://www.
apple.com/DTDs/PropertyList-1.0.dtd”>
<plist version=“1.0”>
<dict>
  <key>ouIds</key>
  <string>161775701</string>
</dict>
</plist>
```

### ❑ Setting Up INSIGHT on PCs and Mac Testing Devices

The following steps describe the process of configuring, installing, deploying, and registering INSIGHT on PCs and Mac (OS X and macOS) testing devices.

1. Use the COS - Device Toolkit to create configurations and deployment files and organize your testing devices in the configurations.
2. Use a silent installation (many testing devices) or an interactive installation (one testing device) to install INSIGHT on one or more machines.
3. If you installed INSIGHT interactively, start INSIGHT and enter the COS - Device Toolkit ORG Unit ID to register the testing device. If you installed INSIGHT using a silent installation, when you start INSIGHT, the testing device is registered automatically.

### ❑ Setting Up INSIGHT on iPad Testing Devices

The following steps describe the process of configuring, installing, deploying, and registering INSIGHT on iPad testing devices.

1. Use the COS - Device Toolkit to create configurations and deployment files and organize your testing devices in the configurations.
2. Use an MDM solution to install INSIGHT on each testing device. To *deploy and register* your DRC INSIGHT iPad software automatically, your MDM software must support the Managed App Configuration feature (first introduced in iOS 7).
3. If you installed and registered INSIGHT using an MDM solution, when you start INSIGHT, the iPad testing device is registered automatically. If you installed INSIGHT using an MDM without the Managed App Configuration feature, start INSIGHT and enter the COS - Device Toolkit ORG Unit ID to register the testing device with the configuration.

### ❑ Setting Up INSIGHT on Chromebook Testing Devices

The following steps describe the process of configuring, installing, deploying, and registering INSIGHT on Chromebook testing devices. This overview assumes that you have registered your Chromebook testing devices in your Google domain account (for more information, see <https://support.google.com/a/answer/182433>).

1. Use the COS - Device Toolkit to create configurations and deployment files and organize your testing devices in the configurations.
2. Use Chrome device management to install and deploy INSIGHT and the deployment files to your Chromebook testing devices. The INSIGHT App is installed as a Kiosk application the next time the policy is reloaded, which takes place once every three hours. To deploy the INSIGHT App immediately, enter **chrome://policy** in the address bar of the Chromebook and click **Reload policies**.
3. After INSIGHT is deployed, without logging into your Chromebook, start it on each Chromebook testing device to register the testing device with the configuration.

### ■ Configuring and Installing INSIGHT with a TSM

The following steps describe the process of configuring a testing device and installing INSIGHT with a TSM.

1. Install one or more TSMs on desktop or laptop computers that have static IP addresses and will be available around the clock.
2. Sign on to the DRC eDIRECT using a supported browser (see “Web Browsers and the COS - Device Toolkit” on page 17) and click **Device Toolkit** to start the COS - Device Toolkit.
3. Use the COS - Device Toolkit to organize and configure your testing devices by performing the following tasks:
  - Create configurations based on your testing setup and needs, group the testing devices into configurations, and specify the testing program, district or school, and TSM connection information for the testing devices in the configuration.
  - Check the contents of the log files during testing to monitor testing and testing device activity and make any configuration changes.
4. Install the INSIGHT App on your testing devices and launch INSIGHT to register the testing device.
5. Run the System Readiness Check to verify that the testing device can connect to the TSM and is ready for testing. If necessary, use the COS - Device Toolkit to reconfigure the testing device configuration and redeploy the configuration software.
6. Test your configurations and monitor the log files for issues.

### □ TSM Considerations

Because of the role that the TSM plays in testing, there are some special considerations regarding TSM software configuration and installation.

- Install TSMs *before* you install INSIGHT, and specify the path to the TSMs and the communication port using the COS - Device Toolkit.
- The computer on which you install the TSM software should have a static IP address (an IP address that does not change when the computer is restarted or rebooted). If the IP address of a TSM machine changes, you must use the COS - Device Toolkit to update the TSM configuration.
- To change or remove a TSM configuration after a testing device is configured, use the Locations page of the COS - Device Toolkit. When you restart INSIGHT, it automatically updates the testing device’s configuration to reflect your changes.

### ❑ Installing Multiple TSMs and INSIGHT

If you plan to use the same testing computers for multiple types of testing programs, you may need to install more than one TSM.

- You cannot install more than one TSM on the same computer—each TSM must be installed on a dedicated computer.
- You can use INSIGHT to access multiple testing programs (for example, ACCESS for ELLs 2.0 and your state-specific testing program) from the same testing device. You access these testing programs using the same DRC INSIGHT desktop shortcut. When you start INSIGHT, a page appears listing the different testing programs from which you can select.
- You can install a TSM and INSIGHT on the same computer.

### Starting the COS - Device Toolkit and Displaying a Configuration

To start working with the COS - Device Toolkit, click **Device Toolkit** in eDIRECT.



1. To start the COS - Device Toolkit, sign on to eDIRECT, open the **All Applications** menubar, and click **Device Toolkit**.

**Note:** You must have the Device Toolkit permission in eDIRECT to have access to this link.

The screenshot shows the 'Central Office Services - Device Toolkit' interface. At the top, there are tabs for 'Configurations' and 'Add New Configuration'. The main heading is 'Select Site' with the instruction 'Choose the district or school to manage its Central Office Services'. Below this, there are two fields: 'Testing Program' with a dropdown menu showing 'South Carolina', and 'Site' with a text input field containing 'Select Site'. A line points from the 'Testing Program' dropdown to the second instruction box.

2. When the Select Site page appears, select a testing program from the Testing Program drop-down menu.


**Note:** You see only the clients you can access.

This screenshot is similar to the previous one but shows the 'Site' text input field now containing the letters 'sam'. A line points from this field to the third instruction box. At the bottom of the page, there is a copyright notice 'Copyright © 2017 Data Recognition Corporation' and a status bar showing 'Sample District - 999 - Parent: GA'.

3. Select a site (district or school) from the Site field by typing three or more letters of the site's name.

**Note:** You see only the schools and/or districts that you can access.

### Starting the COS - Device Toolkit and Displaying a Configuration (cont.)

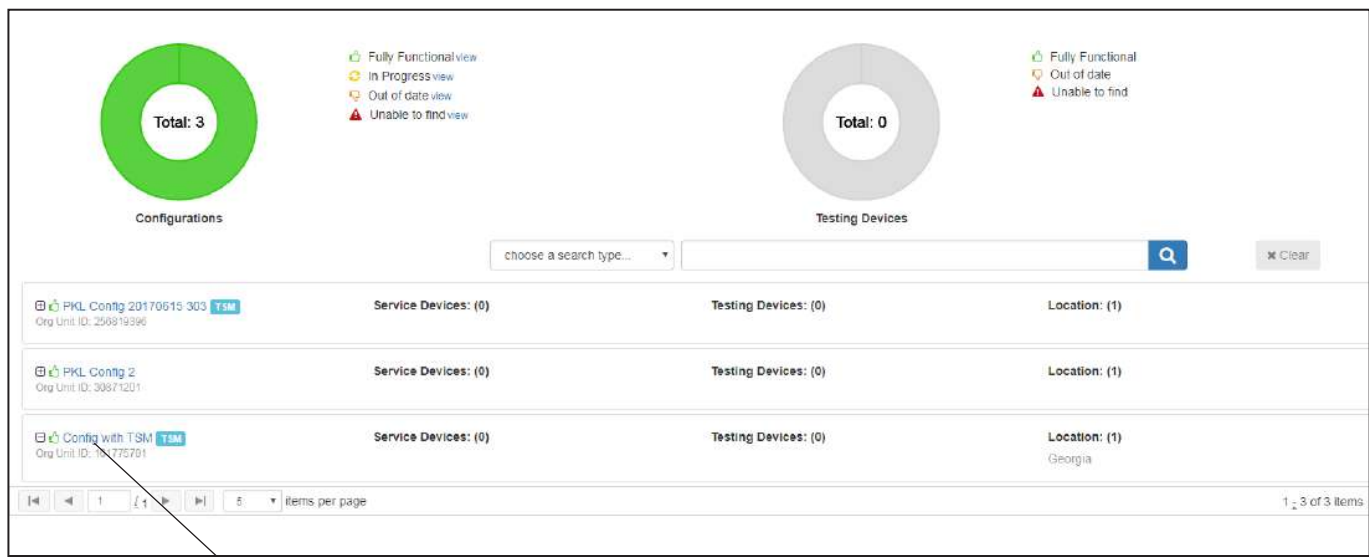

4. The COS - Device Toolkit dashboard appears for the site you selected. You can display a configuration by clicking the configuration name. To change testing programs or sites, click **Change** at the top of the page to re-display the Select Site page.



## Starting the COS - Device Toolkit and Displaying a Configuration (cont.)

Central Office Services - Device Toolkit

Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment Testing Devices Delete

### Config with TSM

Org Unit ID: 161775701  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

#### Configuration Information

Once you have finished configuring this device, the configuration settings you have chosen will be saved. If other Central Office Service devices will need the same settings, you will be able to reuse this configuration for them as well. Please enter a name for this configuration. Try to use a name that will help you and others to select it in the future. Include your district and/or school in the name.

Configuration Name (required):  
Config with TSM

#### Testing Devices Configuration

Please update all of the information that applies to the testing devices associated with this configuration.

☒ Enable Auto Updates  
Allows testing devices to update automatically.

Proxy Host: ☐ No  
Please enter a valid url to your https:// proxy which testing devices will use to communicate with the internet. Only needed when using a proxy server.

Proxy Path:

Update Configuration

The Configuration Information page for the configuration you selected appears. From this page, you can locate the ORG Unit ID for the configuration, change the name of the configuration, enable or disable automatic updates of the DRC INSIGHT testing software, and specify a proxy host.

From the other configuration pages, listed across the top of the configuration, you can perform the following tasks:

- Add locations to, or remove locations from, the configuration
- Specify a TSM to use for content caching and/or load simulation, and a TSM to use for response caching
- Create and/or download a configuration deployment file
- Add, move, or remove testing devices
- View the configuration log files
- Delete the configuration



**Central Office Services:** Various COS - Device Toolkit pages are in place for the Central Office Services implementation and are not functional when you use a TSM in a configuration. These pages are indicated in this volume by the COS icon.

## Creating Configurations

If you want to set up testing devices for testing, you can create a configuration using the Add New Configuration tab. You also can specify a TSM for content caching and/or response caching.

**1.** To create a new configuration, select the Add New Configuration tab.

**2.** When the Configuration Information page appears, enter a meaningful configuration name in the Configuration Name field.

**3.** Select the appropriate options from the Testing Devices Configuration section of the Configuration Information page. For details about the other options, see “Working with Configuration Information” on page 30. When you are ready, click **Next**.

**4.** When the Locations page appears, select a testing program from the Testing Program drop-down menu. Then, start typing a district name, school name, or site code in the Site field. When you locate the district or school name to which you want to register the configuration and its associated service devices and testing devices, click **Add Location**.

**Note:** You can select more than one location if you test with multiple testing programs.

### Creating Configurations (cont.)

- 5.** You can specify content caching for any location that you choose. To specify content caching, toggle the Content Caching option to **Yes** and enter or paste the TSM server domain name\* (from the TSM) for the content caching TSM, prefixed with `https://` and followed by a colon, the port number, and a forward slash (`/`), in the Content Caching URL field in the screenshot below.

An example of the correct format is shown below. Do not use the example; it is an example only.

#### Example

`https://37525ee4-aa4b-47dc-8a9e-19413d7348e5-legacy-sqa.drc-centraloffice.com:8443/`

**Note:** The response caching and content caching TSM can be the same machine.

The screenshot shows a configuration form. At the top, 'Content Caching' is set to 'Yes' with a green toggle. Below it, a text prompt says 'Please provide the url for the TSM that will be used for content caching for this location by testing devices.' The 'Content Caching Url:' field contains the example URL: `https://8c6e7f85-sqa.drc-centraloffice.com:8443/`. Below this is the 'Content Cache Usage' section, which has a dropdown menu. The dropdown is open, showing three options: 'Content Cache Only' (highlighted in blue), 'Load Simulation Only', and 'Content Cache and Load Simulation'. A line from the 'Note' above points to the 'Content Caching' toggle, and another line from the 'Important' section below points to the 'Content Cache Usage' dropdown.

- 6.** Use the Content Cache Usage drop-down menu options to indicate the functions for which the TSM will be used:

- Content Cache only
- Load Simulation only
- Content Cache and Load Simulation

**! Important:** \*Starting with version 9.0.1\_0, the TSM includes a TSM server domain name (If you did not save this information when you installed the TSM, you can retrieve it by starting the TSM.) Upon startup, the TSM sends its IP address to the registration API for DNS resolution. If the IP address of a TSM machine changes, when INSIGHT is restarted, it automatically updates the testing device's TSM configuration to reflect the change. In general, a TSM server should have a static IP address (an IP address that does not change when the computer is restarted or rebooted). Remember to include the forward slash (`/`) at the end of the path to the TSM server—without it, your TSM will not be configured correctly.

### Creating Configurations (cont.)

7. You also can specify response caching for any location that you choose. To specify response caching, toggle the TSM Response Caching option to **Yes** and enter or paste the TSM server domain name\* (from the TSM), prefixed with `https://` and followed by a colon, the port number, and a forward slash (/), in the field below.

An example of the correct format is shown below. Do not use the example; it is an example only.

#### Example

`https://37525ee4-aa4b-47dc-8a9e-19413d7348e5-legacy-sqa.drc-centraloffice.com:8443/`

**Note:** The response caching and content caching TSM can be the same machine.


**TSM Response Caching** ☒ **Yes**

Are using a TSM for response caching for this location? Works with Content Hosting or a TSM only location.

Please provide the url for the TSM that will be used for response caching for this location by testing devices.


**A https url is required**

8. When you have selected all your locations, **click Next**.

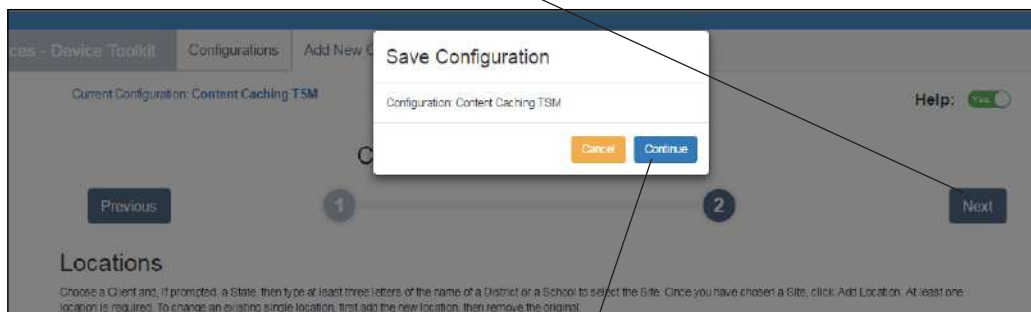

9. The Save Configuration dialog box is displayed to confirm your choice. Click **Continue** to create the configuration (or **Cancel** to cancel the process).

## Creating Configurations (cont.)

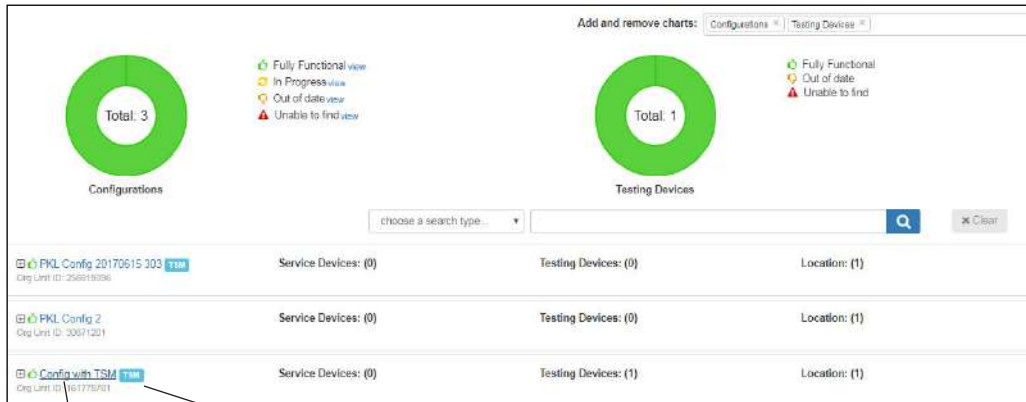

**10.** If you click **Continue**, the Configuration Information page displays your new configuration. You can link testing devices to this configuration, and students will be able to test.

**Note:** The TSM icon ( **TSM** ) indicates that a content caching TSM is associated with this configuration.

**11.** You can click the configuration name to drill down and review or edit the configuration.

The screenshot shows the 'Config with TSM' configuration page. The page has a header with 'Central Office Services - Device Toolkit' and 'Configurations'. Below the header is a navigation bar with 'Configuration Information', 'Locations', 'Content Management', 'Content Hosting', 'Service Devices', 'Deployment', 'Testing Devices', and 'Delete'. The main content area is titled 'Config with TSM' and includes a 'Help' button. Below the title is a section for 'Configuration Information' with a text input field for 'Configuration Name (required)'. Below this is a section for 'Testing Devices Configuration' with a checkbox for 'Enable Auto Updates' and a text input field for 'Proxy Host'. At the bottom right is an 'Update Configuration' button.

## Working with Configuration Information

This section describes how you can use the COS - Device Toolkit Configuration Information page to rename a configuration, turn automatic INSIGHT software updates off or on, and specify a proxy host server.

Central Office Services - Device Toolkit

Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment Testing Devices Delete

Help: ☒

### Config with TSM

Org Unit ID: 161775701  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

#### Configuration Information

Once you have finished configuring this device, the configuration settings you have chosen will be saved. If other Central Office Service devices will need the same settings, you will be able to reuse this configuration for them as well. Please enter a name for this configuration. Try to use a name that will help you and others to select it in the future. Include your district and/or school in the name.

Configuration Name (required):

#### Testing Devices Configuration

Please enter a valid URL to your business proxy which testing devices will use to communicate with the internet. Only necessary when using a proxy server.

Proxy Path:

Update Configuration

1. From the COS - Device Toolkit dashboard, select a configuration. The Configuration Information page for the configuration you selected is displayed with its unique alphanumeric ORG Unit ID.

2. You can rename the configuration by entering a new name in the Configuration Name field.

Central Office Services - Device Toolkit

Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment Testing Devices Delete

Help: ☒

### Config with TSM

Org Unit ID: 161775701  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

#### Configuration Information

Once you have finished configuring this device, the configuration settings you have chosen will be saved. If other Central Office Service devices will need the same settings, you will be able to reuse this configuration for them as well. Please enter a name for this configuration. Try to use a name that will help you and others to select it in the future. Include your district and/or school in the name.

Configuration Name (required):

#### Testing Devices Configuration

Please update all of the information that applies to the testing device.

☒ Enable Auto Updates  
Allows testing devices to update automatically.

Proxy Host: ☒ Yes  
Please enter a valid URL to your https proxy which testing devices will use to communicate with the internet. Only necessary when using a proxy server.

Proxy Path:

Update Configuration

3. To enable automatic INSIGHT software updates, check the **Enable Auto Updates** checkbox.

- If you check the Enable Auto Updates checkbox, DRC updates the INSIGHT software automatically.
- If you do not check the Enable Auto Update checkbox, DRC notifies you whenever an update to the INSIGHT software is available and you must update the software manually.

4. To specify a proxy host server, toggle the Proxy Host option to **Yes** and enter the server name (or IP address) and port number (separated by a colon), followed by a forward slash (/), in the Proxy Path field.

**Note:** Many sites do not use a proxy server. If you are unsure whether your site uses one, contact your network administrator.


5. Click **Update Configuration** when you are finished.



## Working with Locations

Use the COS - Device Toolkit Locations page to view, add, or remove locations where testing devices are registered and to add or remove response caching and/or content caching for a location. You can use the Locations page to specify multiple locations for testing devices that are used for different testing programs, such as ACCESS for ELLs 2.0 and your state testing program.

1. From the Configurations tab, select **Locations** to display the Locations page. This page shows the location(s) where the testing devices are registered.

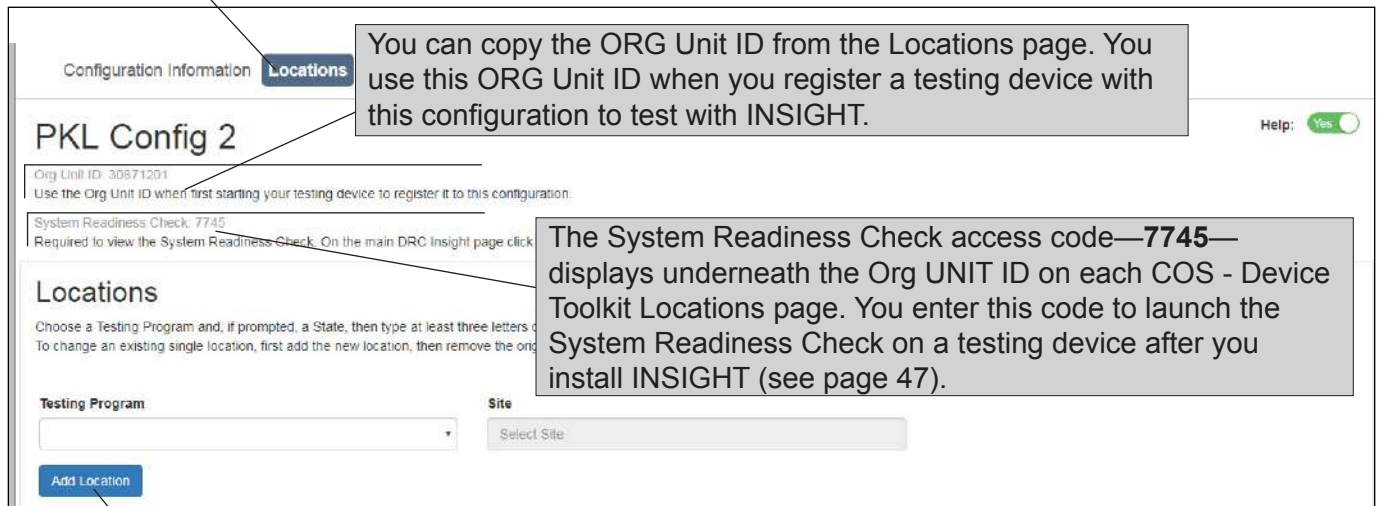

Configuration Information **Locations**

### PKL Config 2

Org Unit ID: 30871201  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

System Readiness Check: 7745  
Required to view the System Readiness Check: On the main DRC Insight page click

**Locations**

Choose a Testing Program and, if prompted, a State, then type at least three letters of the name of a District or a School to select the Site. Once you have chosen a Site, click Add Location. At least one location is required. To change an existing single location, first add the new location, then remove the original.


Testing Program:  Site:

**Add Location**

2. To add a location, select it using the Testing Program menu and Site field and click **Add Location**.

**Note:** You can use the Locations page to specify multiple locations for testing devices that are used for different testing programs, such as ACCESS for ELLs 2.0 and your state testing program.

3. The Locations page reappears with the location added. To remove a location, click **Remove**.

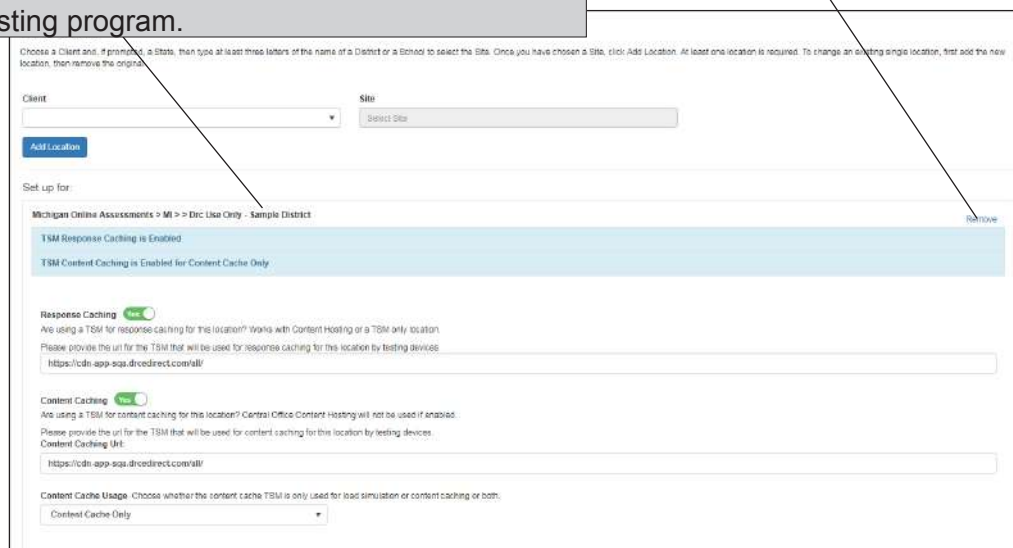

Choose a Client and, if prompted, a State, then type at least three letters of the name of a District or a School to select the Site. Once you have chosen a Site, click Add Location. At least one location is required. To change an existing single location, first add the new location, then remove the original.

Client:  Site:

**Add Location**

Set up for:

Michigan Online Assessments > MI > Dec Use Only - Sample District

TSM Response Caching is Enabled

TSM Content Caching is Enabled for Content Cache Only

**Response Caching** ☒

Are using a TSM for response caching for this location? Works with Content Hosting or a TSM only location.  
Please provide the url for the TSM that will be used for response caching for this location by testing devices.

**Content Caching** ☒

Are using a TSM for content caching for this location? Central Office Content Hosting will not be used if enabled.  
Please provide the url for the TSM that will be used for content caching for this location by testing devices.  
Content Caching Unit:

**Content Cache Usage** Choose whether the content cache TSM is only used for load simulation or content caching or both.

### Working with Locations (cont.)

**! Important:** \*Starting with version 9.0.1\_0, the TSM includes a TSM server domain name (If you did not save this information when you installed the TSM, you can retrieve it by starting the TSM.) Upon startup, the TSM sends its IP address to the registration API for DNS resolution. If the IP address of a TSM machine changes, when INSIGHT is restarted it automatically updates the testing device's TSM configuration to reflect the change. In general, a TSM server should have a static IP address (an IP address that does not change when the computer is restarted or rebooted). Remember to include the forward slash (/) at the end of the path to the TSM server—without it, your TSM will not be configured correctly.

- 4.** You can specify content caching for any location that you choose. To specify content caching, toggle the Content Caching option to **Yes** and enter or paste the TSM server domain name\* (from the TSM) for the content caching TSM, prefixed with `https://` and followed by a colon, the port number, and a forward slash (/), in the Content Caching URL field in the screenshot below. An example of the correct format is shown below. Do not use the example; it is an example only.

#### Example

`https://37525ee4-aa4b-47dc-8a9e-19413d7348e5-legacy-sqa.drc-centraloffice.com:8443/`

**Note:** The response caching and content caching TSM can be the same machine.

TSM Content Caching **Yes**

Are using a TSM for content caching for this location? Central Office Content Hosting will not be used if enabled.

Please provide the url for the TSM that will be used for content caching for this location by testing devices.

Content Caching Uri:

`https://37525ee4-aa4b-47dc-8a9e-19413d7348e5-legacy-sqa.drc-centraloffice.com:8443/`

Content Cache Usage Choose whether the content cache TSM is only used for load simulation or content caching or both.

Content Cache Only ▼

Content Cache Only

Load Simulation Only

Content Cache and Load Simulation

Are using a TSM for response caching for this location? Works with Content Hosting or a TSM only location.

- 5.** Use the Content Cache Usage drop-down menu options to indicate the functions for which the TSM will be used:

- Content Cache Only
- Load Simulation Only
- Content Cache and Load Simulation

**! Important:** Select **Load Simulation Only** or **Content Cache and Load Simulation** only when you are actually conducting a load simulation test using a TSM and a set of student testing devices. Prior to actual student testing (when students are logging in and taking tests), be sure to disable load simulations for the TSM by selecting **Content Cache Only**.



### Working with Locations (cont.)

- 6.** You also can specify response caching for any location that you choose. To specify response caching, toggle the TSM Response Caching option to **Yes** and enter or paste the TSM server domain name\* (from the TSM), prefixed with `https://` and followed by a colon, the port number, and a forward slash (/), in the field below.

An example of the correct format is shown below. Do not use the example; it is an example only.

#### Example

`https://37525ee4-aa4b-47dc-8a9e-19413d7348e5-legacy-sqa.drc-centraloffice.com:8443/`

**Note:** The response caching and content caching TSM can be the same machine.

The screenshot shows a configuration form with two main sections. The first section, 'TSM Content Caching', has a toggle switch set to 'Yes'. Below it, a text field contains the URL 'https://37525ee4-aa4b-47dc-8a9e-19413d7348e5-legacy-sqa.drc-centraloffice.com:8443/'. The second section, 'TSM Response Caching', also has a toggle switch set to 'Yes'. Below it, a text field contains the same URL. At the bottom right of the form is a blue button labeled 'Update Configuration'.

- 7.** When you are finished making updates, click **Update Configuration**. A message appears to confirm that the configuration was updated.

## Working with Content Management

Use the Content Management page to enable or disable Content Management and change the selected administrations and accommodations.

 **Central Office Services:** The Content Management functionality is part of the Central Office Services interface but is unavailable for the COS - Device Toolkit.

Central Office Services - Device Toolkit

Configurations

Add New Configuration

Configuration Information

Locations

Content Management

Content Hosting

Service Devices

Deployment

Testing Devices

Delete

Config with TSM

Help: ☒ Yes ☐ No

Org Unit ID: 161775701

Use the Org Unit ID when first starting your testing device to register it to this configuration.

Content Management is not available when only TSMs are used for content caching.

Content Management ☐ No ☒ Yes

Content Management is currently not available. Add a Service Device to allow activation.

If you set Content Management to Yes, the test content for the administrations and accommodations that are selected in the grid will be automatically downloaded to your Central Office device. All available administrations and accommodations default to being selected. Accommodations can include Text to Speech (TTS), Human Voice Audio (HVA) and Video Sign Language (VSL). Not all accommodations are available for every administration. If you need to save space on the device, you can deselect items that you don't need by clicking the checkboxes. Once you have made your selections, click Next.


|                          |       |                          |     |                          |     |                          |     |
|--------------------------|-------|--------------------------|-----|--------------------------|-----|--------------------------|-----|
| <input type="checkbox"/> | Admin | <input type="checkbox"/> | TTS | <input type="checkbox"/> | HVA | <input type="checkbox"/> | VSL |
|--------------------------|-------|--------------------------|-----|--------------------------|-----|--------------------------|-----|

Update Configuration

## Working with Content Hosting

Use the Content Hosting page to enable or disable Content Hosting, and to update, add, or change the order of or remove the content sources.

 **Central Office Services:** The Content Hosting functionality is part of the Central Office Services interface but is unavailable for the COS - Device Toolkit.

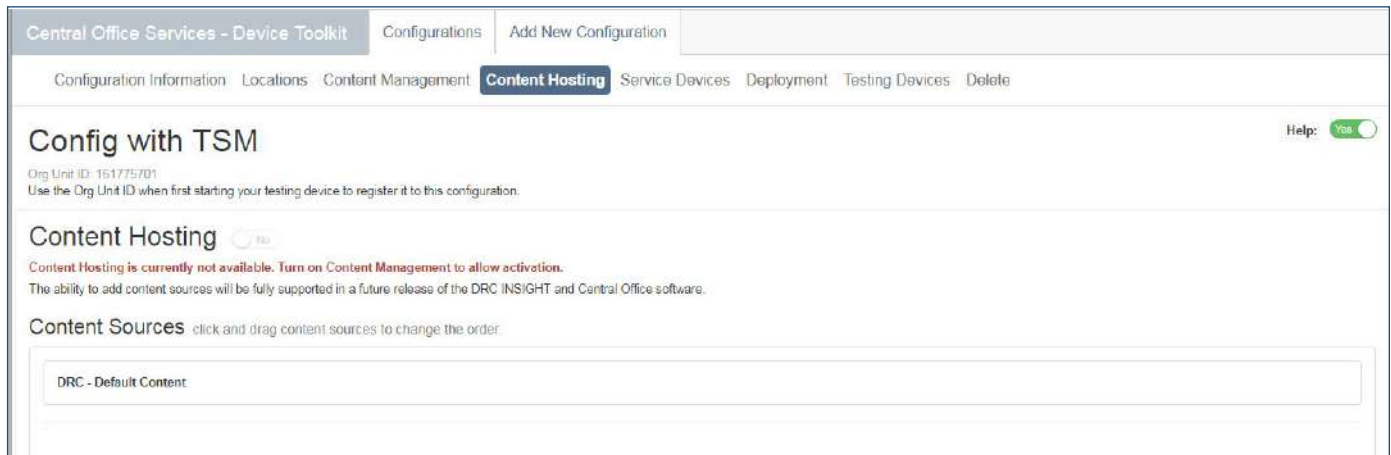

### Working with Service Devices

Use the **Service Devices** page to view the current status of the service device(s) associated with the configuration and to add service devices to, or remove them from, a configuration.



**Central Office Services:** The Service Device functionality is part of the Central Office Services interface but is unavailable for the COS - Device Toolkit.

Central Office Services - Device Toolkit

ConfigurationsAdd New Configuration

Configuration Information

Locations

Content Management

Content Hosting

Service Devices

Deployment

Testing Devices

Delete

Config with TSM

Org Unit ID: 161775701  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

Service Devices (0)

Service Device Id

Add

No results found

Actions

### ■ Creating Configuration Files for Multiple Testing Programs

You can use one testing device for more than one type of testing program (for example, ACCESS for ELLs 2.0 and your state-specific testing program). The following is a brief overview of this process, which is detailed further in “Creating a Deployment File for Testing Devices” on page 39.

1. First, select the **Device Toolkit** from eDIRECT and use the COS - Device Toolkit to create a configuration containing both of the testing programs as locations for testing.
2. Next, deploy the configuration to the testing device. When a user starts INSIGHT on the testing device, the user can select from the testing programs located in the configuration (see the generic example below).

**Select a testing program:**

**Testing Program A**

**Testing Program B**

### ❑ Deployment Files, Configurations, and the TSM

Each TSM you use must be identified in the COS - Device Toolkit.

.....  
**! Important:** To prevent potential issues and avoid overloading a TSM during testing, DRC recommends that each configuration should be configured to use a unique TSM (see the scenario below).  
.....

#### **Scenario: Potential TSM Overload**

Even if you limit the number of testing devices per configuration, the possibility exists to overload the TSM by stacking configurations.

Assume the following:

1. You configure configuration A with a TSM for testing, create a deployment file, and use this configuration for one group of testing devices.
2. You configure configuration B with the same TSM, create a deployment file, and use this configuration for a different set of testing devices.
3. You use both configurations to perform testing.

The potential may exist for too many testing devices to simultaneously access the same TSM, which could overload the TSM. For details regarding the number of concurrent testers and system requirements, refer to the latest version of the *DRC INSIGHT Online Learning System Supported System Requirements* available at your state's eDIRECT site by navigating to **All Applications–General Information–Downloads** and clicking **View System Requirements**.

[View System Requirements](#)

[Monitor Setting Verification](#)




[Supported System Requirements](#)

## Creating Deployment Files for Testing Devices

You can use the COS - Device Toolkit to create a deployment file for testing devices using an existing configuration. You use this file to configure your testing devices when you install INSIGHT silently (non-interactively or in batch mode). You also can use the COS - Device Toolkit to create unattended installer scripts to install DRC INSIGHT silently (non-interactively).

1. Select a configuration from the Configurations tab and select **Deployment**.

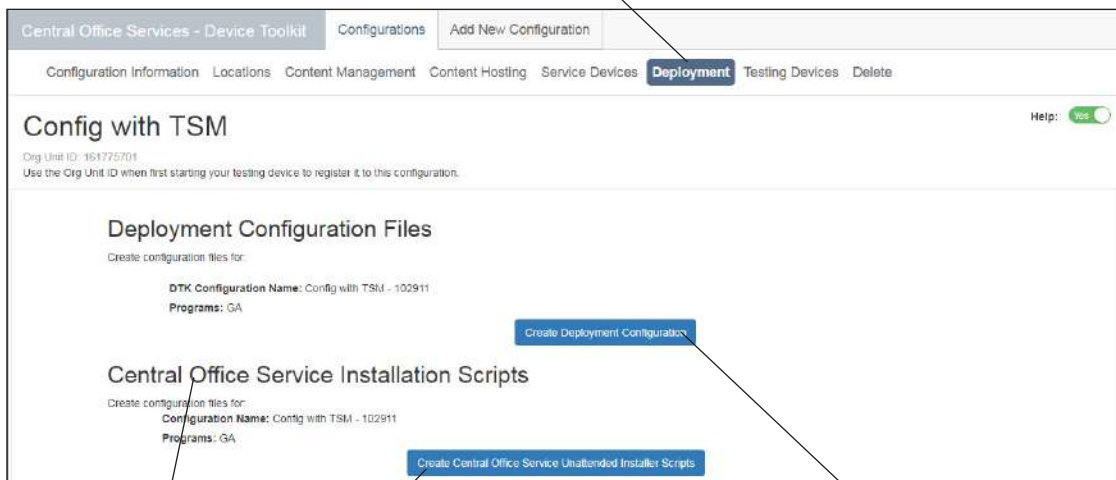

2. To create a deployment configuration file (.zip) for testing devices, click **Create Deployment Configuration**.

**Note:** This option is available from every type of COS - Device Toolkit configuration.

---

 **Central Office Services:** The **Central Office Service Installation Scripts** section of the page and the associated **Create Central Office Service Unattended Installer Scripts** button are not part of the COS - Device Toolkit.

---

## Creating Deployment Files for Testing Devices (cont.)

Central Office Services - Device Toolkit

Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices **Deployment** Testing Devices Delete

### Config with TSM

Org Unit ID: 161775701  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

#### Deployment Configuration Files

Create configuration files for:

DTK Configuration Name: Config with TSM - 102911  
Programs: GA

Create Deployment Configuration

Click Save to create and save the configuration files.

Save Cancel

3. Click **Save** to create a configuration file (or **Cancel** to cancel the process).

Creative Cloud Files

Desktop Desktop Downloads Dropbox Favorites insight

Sys Reqs TABE User Guide Technical Bulletins Test Files User Guides Libraries

File name: insight\_161775701.zip

Save as type: PKZIP File

Hide Folders

Save Cancel

4. When you click **Save**, a box appears that allows you to specify where to download the deployment configuration file (.zip).

For a description of the files contained in this file, see “COS - Device Toolkit Deployment Files and Silent Installation” on page 17 and “Example Deployment File Templates” on page 18.

For more information about deployment files, see *Volume IV: DRC INSIGHT*.



## Working with Testing Devices

Select a configuration from the Configurations tab and select **Testing Devices** to view the list of testing devices that are currently part of the configuration. You can sort the list using certain column headings. You also can move testing devices, remove testing devices, and reload (refresh) the display. In addition, you can edit the configuration by adding testing devices, and you can view the log files for a testing device.

You can sort the list of testing devices in a configuration by clicking the following column headings: **ID** (Device ID), **Internal IP**, **External IP**, and **Last Seen**. When you click the heading, an up (▲) or down (▼) arrow appears in the column heading, indicating whether the sort is in ascending (up arrow) or descending (down arrow) order. Click the header again to change the sort order.

Central Office Services - Device Toolkit

Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment **Testing Devices** Delete

Help: Yes

### Config with TSM

Org Unit ID: 161775701  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

Testing Devices (1)

| ID       | Name      | Version | User       | Type | Internal IP | External IP | Last Seen      | View Logs |   |
|----------|-----------|---------|------------|------|-------------|-------------|----------------|-----------|---|
| 877BC... | MGWS20559 | 8.0.0   | bbalderson |      | 10.1.98.190 | 172.21.1.1  | 8/3/17 4:58 PM | View Logs | x |

1 of 1 items

| Field            | Description   |      |                     |  |                   |  |      |  |                      |  |         |
|------------------|---|------|---------------------|--|-------------------|--|------|--|----------------------|--|---------|
| <b>ID</b>        | The unique alphanumeric Device ID that Central Office created for the testing device  |      |                     |  |                   |  |      |  |                      |  |         |
| <b>Type</b>      | <p>An icon representing the testing device type. The icons and their respective testing device type or operating system are shown below.</p> <table> <tr> <th>Icon</th><th>Testing Device Type</th></tr> <tr> <td></td><td>Chromebook device</td></tr> <tr> <td></td><td>iPad</td></tr> <tr> <td></td><td>Mac (OS X and macOS)</td></tr> <tr> <td></td><td>Windows</td></tr> </table> | Icon | Testing Device Type |  | Chromebook device |  | iPad |  | Mac (OS X and macOS) |  | Windows |
| Icon             | Testing Device Type   |      |                     |  |                   |  |      |  |                      |  |         |
|                  | Chromebook device   |      |                     |  |                   |  |      |  |                      |  |         |
|                  | iPad  |      |                     |  |                   |  |      |  |                      |  |         |
|                  | Mac (OS X and macOS)  |      |                     |  |                   |  |      |  |                      |  |         |
|                  | Windows   |      |                     |  |                   |  |      |  |                      |  |         |
| <b>IP</b>        | The internal IP address of the testing device   |      |                     |  |                   |  |      |  |                      |  |         |
| <b>Last Seen</b> | The date and time (Central Time) the testing device was last used for INSIGHT testing   |      |                     |  |                   |  |      |  |                      |  |         |
| <b>x</b>         | The remove testing device option (Click the x to remove the testing device from the configuration. A dialog box is displayed that confirms the removal.)  |      |                     |  |                   |  |      |  |                      |  |         |

## Moving, Removing, and Reloading Testing Devices

You can use the COS - Device Toolkit to move testing devices between configurations, remove testing devices from configurations, and reload (refresh) the page.

Central Office Services - Device Toolkit

Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment **Testing Devices** Delete

### Config with TSM

Org Unit ID: 161775701  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

Testing Devices (1)

| ID       | Name      | Version | User       | Type | Internal IP | External IP | Last Seen      |  |
|----------|-----------|---------|------------|------|-------------|-------------|----------------|--|
| 877BC... | MGWS20559 | 8.0.0   | bbalderson |      | 10.1.98.130 | 172.21.1.1  | 8/3/17 4:58 PM |  |

1 - 1 of 1 items

Actions

- Move Devices
- Remove Devices
- Reload This Page

1. Select **Testing Devices** for the correct configuration. To move, remove, or reload testing devices, select each device by clicking the checkmark next to it and use the Actions drop-down menu to select the correct option.

### Option

### Description

#### Move Devices

This option moves each selected testing device to a different configuration. You are prompted to supply the ORG Unit ID for the target configuration.


#### Remove Devices

This option removes each selected testing device from the current configuration. A dialog box is displayed that confirms the removal. You also can remove a device by clicking the **x** in the rightmost device field.

#### Reload This Page

This option refreshes the display using the latest information about the current testing devices.

## Moving, Removing, and Reloading Testing Devices (cont.)

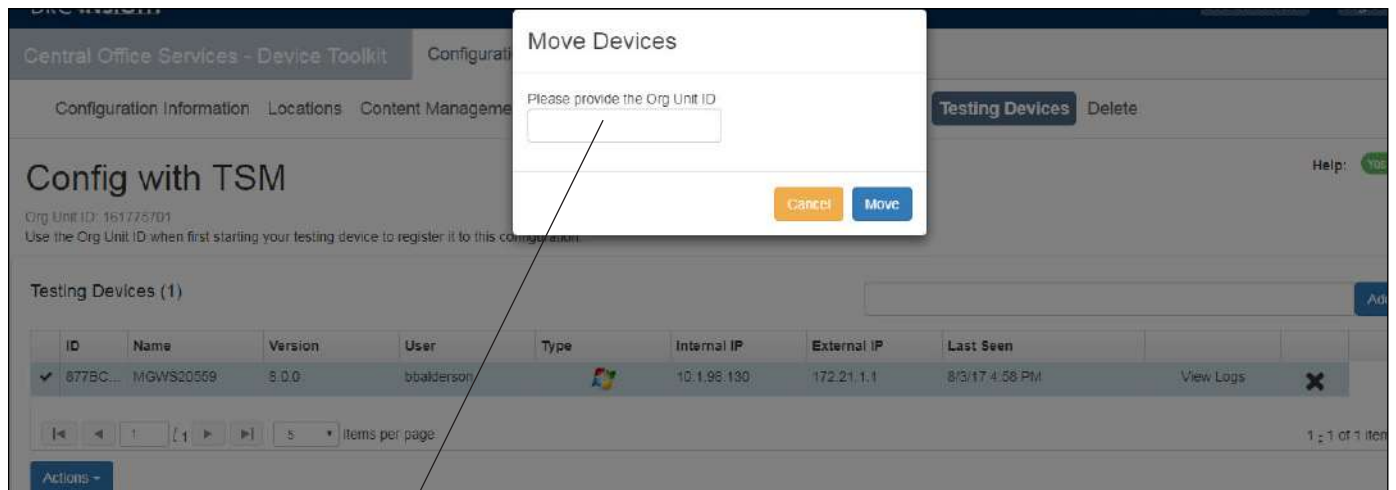


**2a.** If you attempt to move a device, the Move Devices dialog box appears. Enter the testing device's target ORG Unit ID and click **Move** to move the testing device (or **Cancel** to cancel the move).

### Confirm Removal

Are you sure you want to remove these devices: B27AF3E9-F6F3-485E-8E9E-BF38EFA42E99?

Cancel Remove

**2b.** If you attempt to remove a device, the Confirm Removal dialog box appears. Click **Remove** to remove the testing device from the configuration (or **Cancel** to cancel the removal).

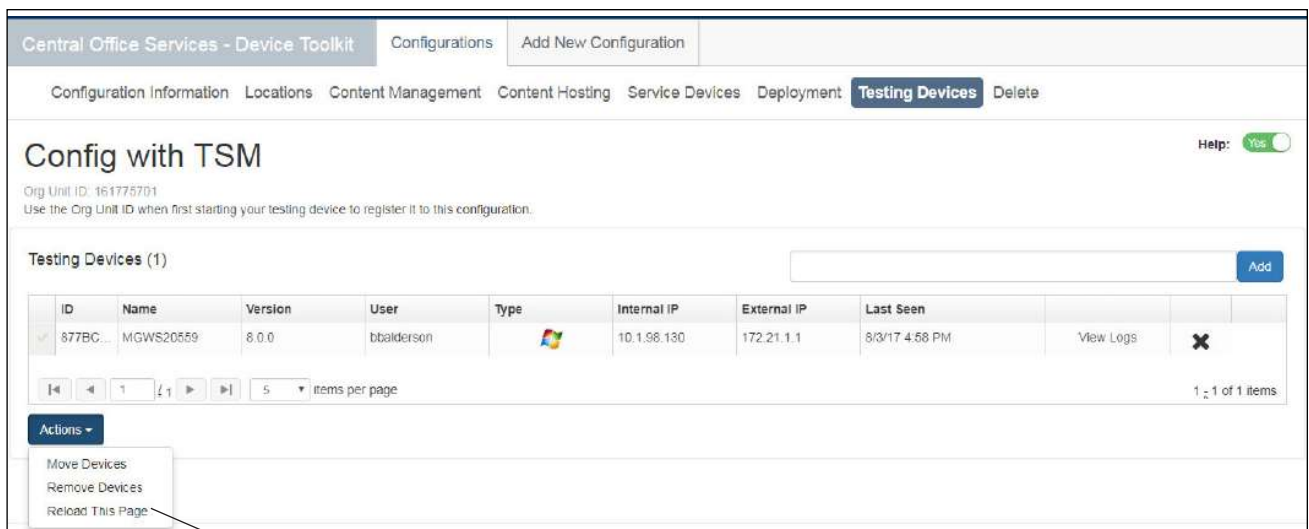


**3.** After you move or remove a device, you can select **Reload This Page** from the Actions drop-down menu to refresh the display with the latest information and to verify any changes that you made.

### Moving Testing Devices between Districts and/or Schools

You can use the COS - Device Toolkit to move one or more testing devices between districts and/or schools without having to uninstall and reinstall each testing device. To perform this process, move the testing device from its current configuration (the source configuration) to a target configuration for a different district and/or school.

**Note:** This process is useful for keeping your testing devices organized. For testing purposes, testing devices do not have to be in their designated district or school—any student at any school can test on any testing device. The COS - Device Toolkit settings are basically used to indicate whether automatic INSIGHT software updating (Auto Update) is enabled and to provide the connection information for a proxy host, content caching, and response caching.

**! Important:** To perform this process, you must have the correct permissions to access multiple districts and/or schools. You also must be able to locate the testing devices in the source configuration and know the target configuration's ORG Unit ID.

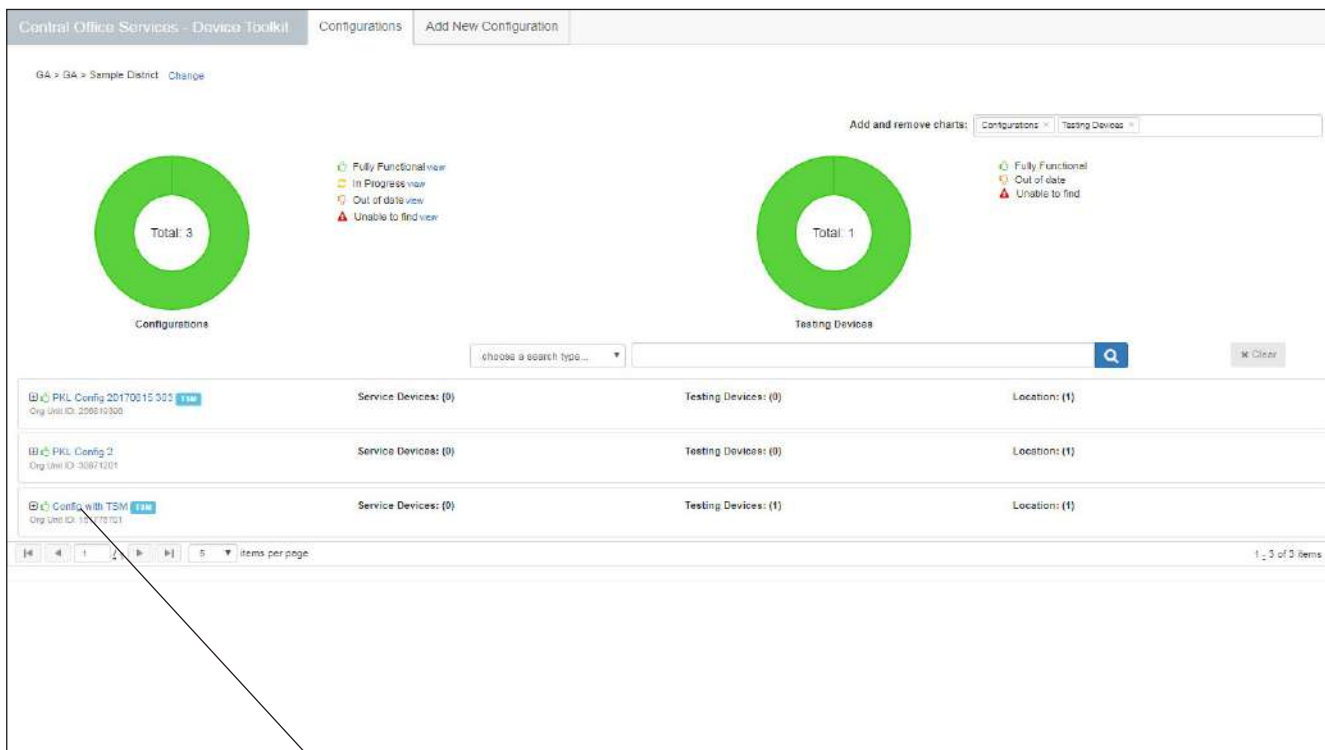

1. To move one or more testing devices to a different district or school (configuration), from the COS - Device Toolkit, select the source configuration from the dashboard.

### Moving Testing Devices Between Districts and/or Schools (cont.)

2. When the source configuration appears, select **Testing Devices**.

Central Office Services - Device Toolkit


Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment **Testing Devices** Delete

### Config with TSM

Org Unit ID: 161775701  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

Testing Devices (1)

| ID       | Name      | Version | User       | Type  | Internal IP | External IP | Last Seen      |                      |
|----------|-----------|---------|------------|---|-------------|-------------|----------------|----------------------|
| 877BC... | MGWS20559 | 6.0.0   | bbalderson |  | 10.1.96.130 | 172.21.1.1  | 6/3/17 4:56 PM | <a href="#">View</a> |

1 items per page

Actions ▾

- Move Devices
- Remove Devices
- Reload This Page

3. Enter a checkmark next to each testing device you want to move and use the Actions drop-down menu to select **Move Devices**.

**Note:** If necessary, use your browser to search by Device ID to locate a testing device.

### Move Devices

Please provide the Org Unit ID

[Cancel](#) [Move](#)

4. When the Move Devices dialog box appears, enter the ORG Unit ID of the target configuration in the field that appears and click **Move**.

## Moving Testing Devices between Districts and/or Schools (cont.)

Central Office Services - Device Toolkit

Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment **Testing Devices** Delete

### Config with TSM

Org Unit ID: 161775701  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

You successfully moved testing devices 877BC4B1-99C4-495D-8753-A5EF574675D9 to configuration PKL Config 2 - 30871201

Testing Devices (0)

No results found

Actions +

- 5.** If the move is successful, a message appears that indicates the configuration to which the device was moved.

Central Office Services - Device Toolkit


Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment **Testing Devices** Delete

### PKL Config 2

Org Unit ID: 30871201  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

Testing Devices (1)

| ID                                   | Name      | Version | User       | Type  | Internal IP | External IP | Last Seen      |                      |
|--------------------------------------|-----------|---------|------------|---|-------------|-------------|----------------|----------------------|
| 877BC4B1-99C4-495D-8753-A5EF574675D9 | MGWS20559 | 8.0.0   | bbalderson |  | 10.1.98.130 | 172.21.1.1  | 8/3/17 4:58 PM | <a href="#">View</a> |

Items per page


Actions +

- 6.** To verify the device was moved, select click the Configurations tab to display the dashboard, select the target configuration, and select **Testing Devices**. The testing device should appear on the Testing Devices page of the target configuration.

## Moving Testing Devices between Districts and/or Schools (cont.)

- 7.** Steps 7–9 are optional steps you can perform to further verify that the move process was successful.

Start DRC INSIGHT on the testing device and open the System Readiness Check by clicking the checkmark in the lower left corner of the main INSIGHT testing page.

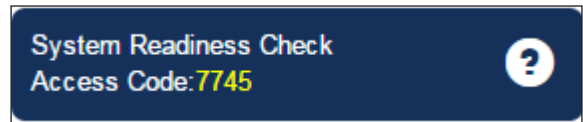

**Enter Access Code**

7745

Submit Cancel

- 8.** When prompted, enter the access code **7745** in the Enter Access Code field and click **Submit**.

- 9.** On the System Information page that appears, the District column and/or the School column should indicate the target location.

| System Information                                      |                                    |   |                                   |               |
|---|------------------------------------|---|-----------------------------------|---------------|
| Client Version  | Configuration Source               | Installation Directory  |                                   |               |
| 8.0.0   | Device Toolkit                     | C:\Program Files (x86)\DRC INSIGHT Online Assessments (SQA)         |                                   |               |
| Machin Name   | User Name                          | OS Level  | OS Version                        |               |
| PLYLT12352  | ebamey                             | Microsoft Windows 7 Professional Service Pack 1 (build 7601) 64-bit | 6.1                               |               |
| Response Caching TSM Connection                         | Response Caching TSM Configuration | Content Caching TSM Connection                                      | Content Caching TSM Configuration |               |
| https://c6d0d494-legacy-sqa.drc-centraloffice.com:8443/ | Yes                                | https://c6d0d494-legacy-sqa.drc-centraloffice.com:8443/             | Yes                               |               |
| HTTPS Proxy   | Device ID                          | Device Toolkit Organizational Unit and ID                           | District                          | School        |
|   | XJb2WHJkN                          | TSM GA-SQA (onsite) (-koBZJxIP)                                     | Sample District                   | Sample School |

| Required Test List |                     |         |
|--------------------|---------------------|---------|
| Status             | Test Name           | Details |
| ✓                  | Screen Resolution   | Details |
| ✓                  | Internet Connection | Details |
| ✓                  | RAM                 | Details |
| ✓                  | Audio Capability    | Details |
| ✓                  | OS Level            | Details |
| ✓                  | User Agent          | Details |



## Adding Testing Devices by Device ID

You can use the COS - Device Toolkit to add testing devices to a configuration to organize your testing devices for testing. To add a testing device, you must know the Device ID.

**Note:** If you add a device from one configuration to another configuration, the device is moved from the first configuration into the second configuration.

Central Office Services - Device Toolkit

Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment **Testing Devices** Delete

PKL Config 2

Org Unit ID: 30671201  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

Testing Devices (0)

877BC4B1-89C4-485D-8753-A5EF574575D8 Add

No results found

Actions -

1. Select **Testing Devices** for the correct configuration, enter the Device ID of the testing device in the Add field, and click **Add** to add the testing device.

Central Office Services - Device Toolkit

Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment **Testing Devices** Delete

PKL Config 2

Org Unit ID: 30671201  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

You successfully added device 877BC4B1-89C4-485D-8753-A5EF574575D8

Testing Devices (1)

| ID                                   | Name      | Version | User       | Type    | Internal IP | External IP | Last Seen      | View Logs |   |
|--------------------------------------|-----------|---------|------------|---------|-------------|-------------|----------------|-----------|---|
| 877BC4B1-89C4-485D-8753-A5EF574575D8 | NGWS20558 | 8.0.0   | lbalderson | Windows | 10.1.98.130 | 172.21.1.1  | 8/3/17 4:58 PM | View Logs | X |

Items per page 1 of 1 items

Actions -

2. The Testing Devices grid reappears with the testing device added to the configuration. (You may need to select **Reload This Page** from the Actions drop-down menu to refresh the display.)

**Note:** The Device ID is not the testing device's serial number.



## Viewing Testing Device Log Files

You can use the COS - Device Toolkit log files to review system information about the testing devices assigned to a configuration. The log entries are stored for 30 days.

Central Office Services - Device Toolkit

Configurations Add New Configuration

Configuration Information Locations Content Management Content Hosting Service Devices Deployment **Testing Devices** Delete

### Config with TSM

Org Unit ID: 161775701  
Use the Org Unit ID when first starting your testing device to register it to this configuration.

Testing Devices (1)

| ID       | Name      | Version | User       | Type | Internal IP | External IP | Last Seen      |           |
|----------|-----------|---------|------------|------|-------------|-------------|----------------|-----------|
| 877BC... | MGWS20559 | 8.0.0   | bbalderson |      | 10.1.98.130 | 172.21.1.1  | 8/3/17 4:58 PM | View Logs |

1 5 Items per page

Actions

1 of 1 items

**1.** Select a configuration and select **Testing Devices**.

**2.** Click **View Logs** for the device whose log files you want to view.

Central Office Services - Device Toolkit

Configurations Add New Configuration

### Logs for Config with TSM: 102911 - 877BC4B1-89C4-485D-8753-A5EF574575D8

| Updated | Message  |
|---------|--|
| 8/3/17  | Device assigned to group Config with TSM (161775701) |

1 5 Items per page

back

1 of 1 items

**3.** System information about the device appears. You can view the time an incident was logged, the Device ID, and the message.

## Deleting Configurations

You can use the COS - Device Toolkit Delete to delete a configuration. To delete a configuration, all of the testing devices and TSMs associated with the configuration must be removed from the configuration (see “Moving, Removing, and Reloading Testing Devices” on page 50).

1. Select a configuration and select **Delete**.

The screenshot shows the 'Central Office Services - Device Toolkit' interface. The 'Configurations' tab is active, and the 'Delete' button is highlighted in the top navigation bar. The main content area displays 'Config with TSM' and 'Delete the configuration?' with a 'Delete' button.


2. Click **Delete** to delete the configuration from the Central Office Services database.

**Note:** You must remove all of the configuration's TSMs and testing devices before you can delete the configuration.

The 'Confirm Deletion' dialog box asks, 'Are you sure you want to delete this configuration? All associated devices will be disabled.' It features 'Cancel' and 'Continue' buttons.

3. When you click **Delete**, if there are no TSMs or testing devices associated with the configuration, the Confirm Deletion dialog box appears, allowing you to verify your decision. Click **Continue** to delete the configuration (or **Cancel** to cancel the deletion).

## Notes



Data Recognition Corporation (DRC)  
13490 Bass Lake Road  
Maple Grove, MN 55311

Toll Free 1-800-451-7834  
eDIRECT: <https://sc.drcedirect.com>  
Email: [SCProject@datarecognitioncorp.com](mailto:SCProject@datarecognitioncorp.com)  
Revision Date: October 17, 2017