




Cisco Umbrella

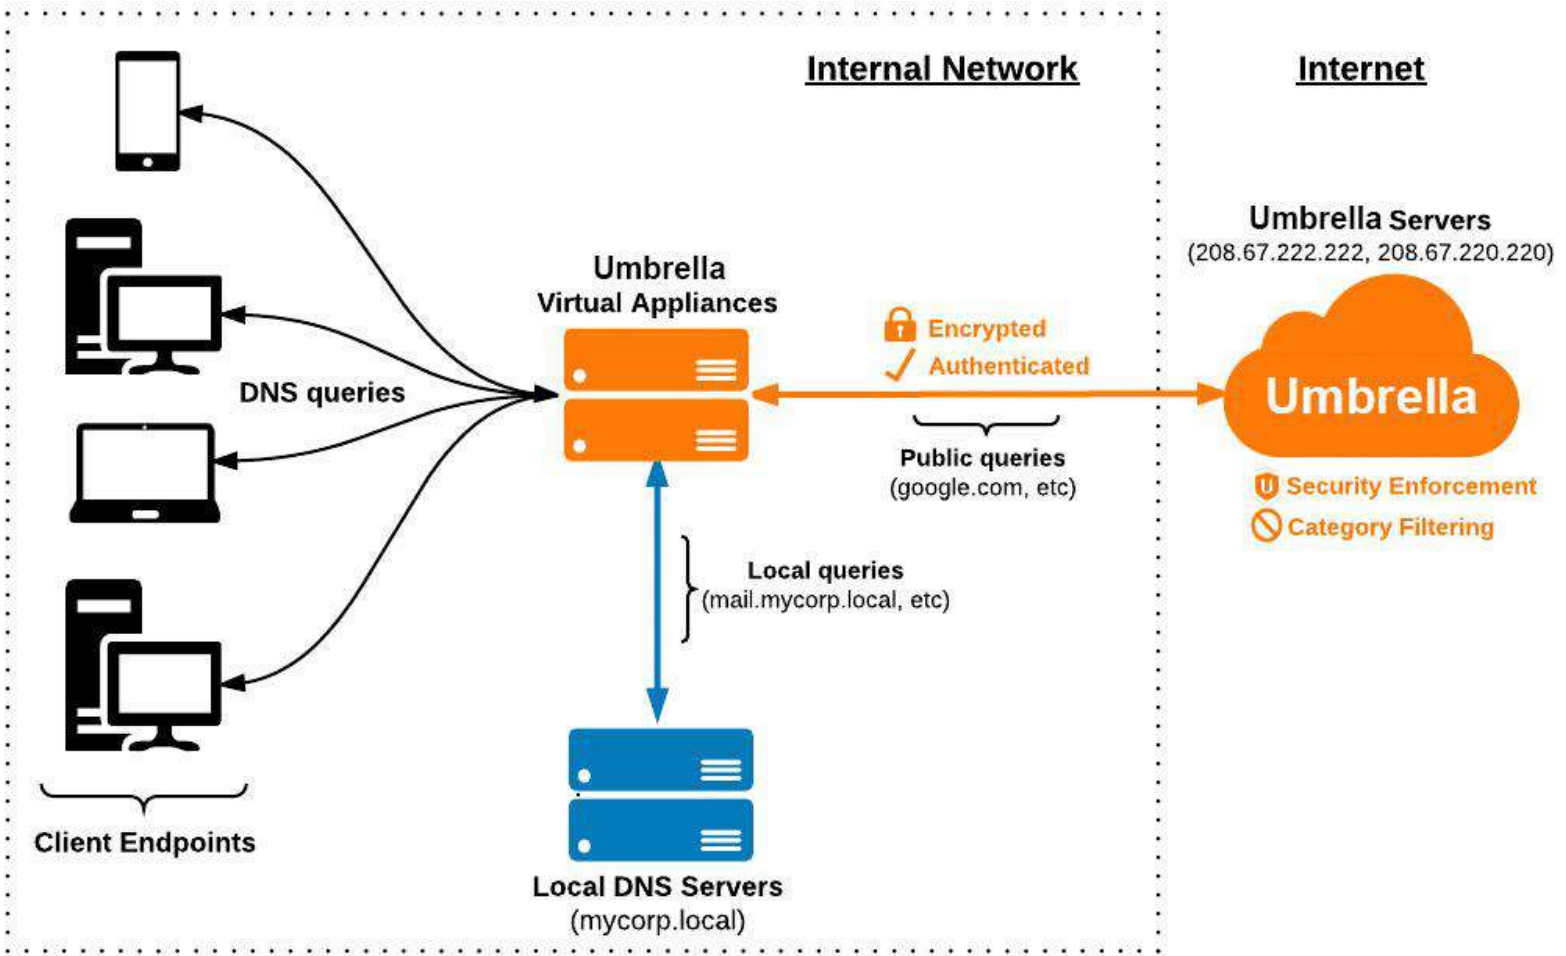

Contents

Umbrella Documentation.....	5
Basic Level Filtering.....	5
OpenDNS Forwarders	5
Local IP Level Filtering.....	8
Virtual Appliance Requirements	9
VA Networking Requirements	9
Download Virtual Appliance:.....	11
Hyper-V Virtual Appliance Deployment.....	12
VMWare Virtual Appliance Deployment	15
Configure the Virtual Appliances	17
Repeat Steps for the second VA	20
Warning	20
Local IP and Active Directory Filtering	21
Prerequisites	21
Create AD User:	21
DCOM Permissions	22
WMI Permissions	24
Active Directory Integration	25
Configure DNS.....	25
Configure Active Directory.....	27
Connect Active Directory	28
Setup DHCP	28
Final Configuration.....	30
Configure Internal Network	30
Domain Management.....	32
Configure Policies	33
Destination Lists.....	33
Category Settings.....	34
Migrating Legacy Content Categories.....	36
Application Settings	39
Block Page Bypass	40
Security Settings	40
Policies	41

Policy Advanced Settings.....	47
Deploying Umbrella Certificate	49
Why Deploy Certificate?	49
Download Certificate.....	50
Deploy Certificate with GPO	51
Deploy Certificate to Chrome Devices with Google Admin.....	54
Verify the CA on managed Chrome devices	54
ByPass User	55
Setting up your Block Page Bypass	55
Setting up a Block Page Bypass User	56
Creating a Block Page Bypass Code	58
Removing a Bypass Code	58
Interacting with a Block Page As a User	59
Chromebook Client.....	62
Installation Guide	63
Prerequisites.....	63
Networking Requirements	63
Recommendations.....	64
Implementing Trusted Network Detection.....	64
Part 1: Obtain the configuration file from Umbrella	64
JSON File Example (Without VA):	65
JSON File Example (With VA):	65
Part 2: Install the Cisco Umbrella Chromebook client extension	67
Part 3: Install the Cisco Umbrella Chromebook client Application	70
Installation Caveats.....	75
Apply Policies	75
Overview	75
Create a Chromebook-specific policy	76
Arrange policies in order	79
Trusted Network Detection	79
How trusted network detection works.....	79
Software requirements.....	80
Deploy the G Suite Identity Service	81
Enabling the G Suite Identity Service.....	81

Install the Cisco Umbrella Authorizer App.....	81
Enter your G Suite super administrator ID in the Umbrella Dashboard.....	82
Removing Cisco Chromebook client software	85
Roaming Client Setup	87
iOS Mobile Security- iPads in Umbrella	87
Requirements	88
1. Install the Cisco Security Connector App.....	89
2. Add an Organization Administrator’s Email Address.....	90
3. Register Your iOS Device Through Your MDM to Umbrella	90
Jamf.....	92
Prerequisites	93
Register Your iOS Device	94
Mosyle	98
Android Mobile Security.....	100
Adding an additional Fixed/Static Network.....	100
(MiFi/Jetpack)	100
Step 1 – Obtain a static IP/range from your ISP	100
Pre-registering Your Networks	101
Step 2 – Set up the Network Identity	101
Step 3 – Change the DNS Settings on Your Relevant Network Device	103
Step 4 – Test Your Network after it’s verified and active	105
Appendix:.....	106
Application Category Descriptions	106
Content Category Descriptions	108
What Policy is being applied?	115
Windows or Mac.....	115
Chromebook.....	116
Gathering or clearing AD Connector Logs.....	117
Logs	117
CIDR Table.....	118

Umbrella Documentation

<https://docs.umbrella.com/deployment-umbrella/docs/welcome-to-cisco-umbrella>


Basic Level Filtering

The most basic implementation of the Cisco Umbrella filter will afford you the state's default filtering level for all your users. Simple and quick to implement, this level of filtering makes no distinction between your users and is not Active Directory aware. All it requires is a change to the DNS forwarders on your local DNS server(s).

OpenDNS Forwarders


Add the OpenDNS Forwarders to ALL of your DNS servers. The OpenDNS Forwarders are **208.67.222.222, 208.67.220.220, 208.67.220.222, and 208.67.222.220**

1. Open **DNS Manger** or type **DNSMGMT** from run or CMD prompt

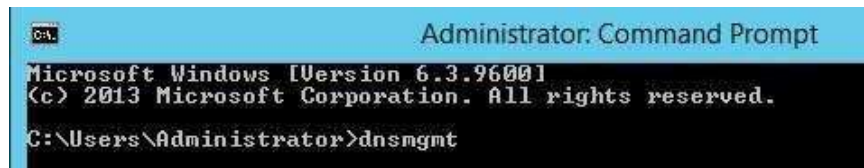

```
Administrator: Command Prompt
Microsoft Windows [Version 6.3.9600]
(c) 2013 Microsoft Corporation. All rights reserved.
C:\Users\Administrator>dnsmgmt
```


2. **Select** your **server name**, right click the **server name** and click **Properties**

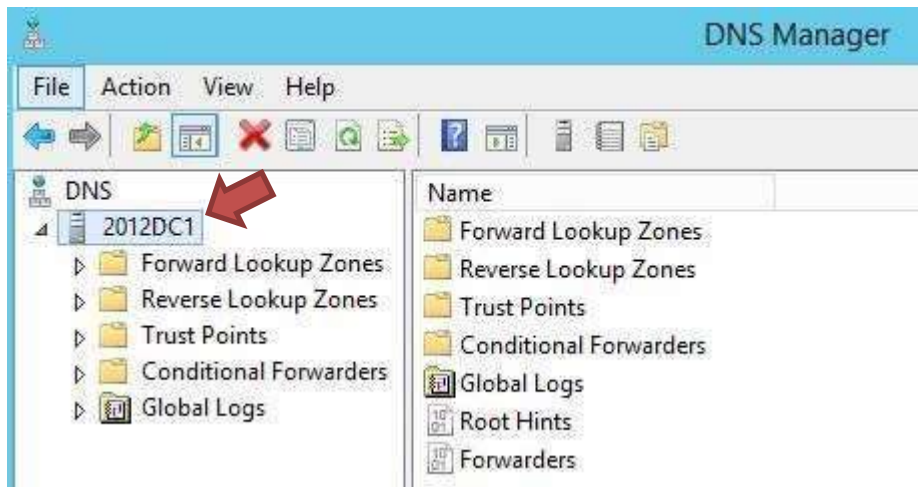


3. In your DNS Server **Properties**, select the **Forwarders** tab



4. **Uncheck** the use root hints box and then click **Edit**

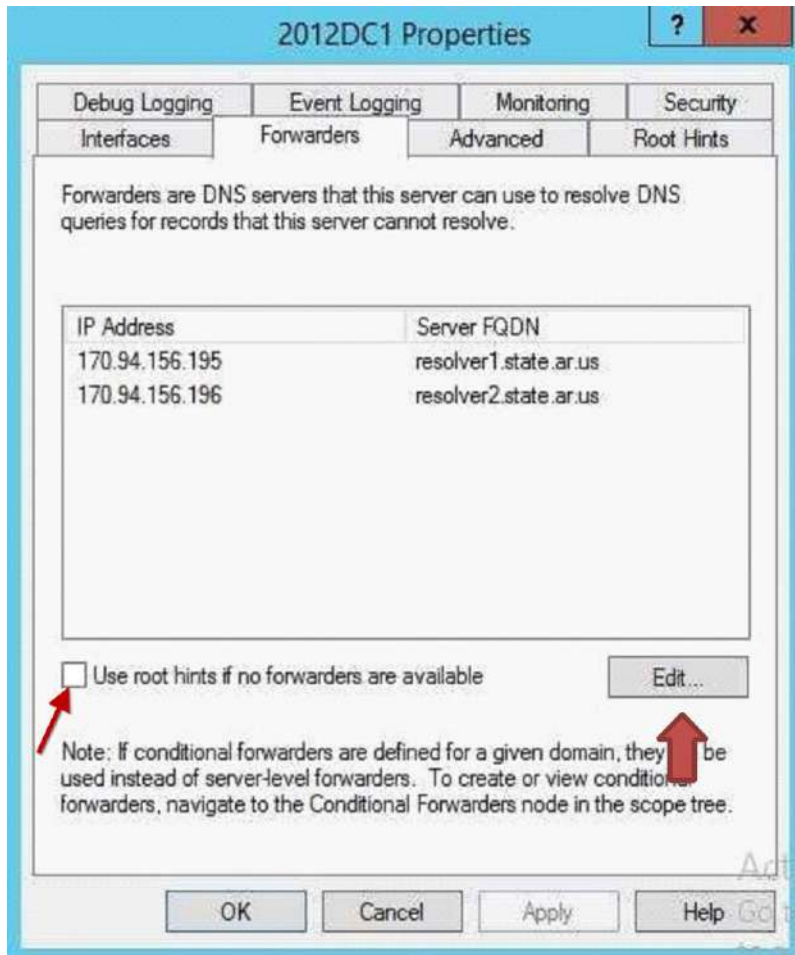

5. **Delete ALL** existing DNS Forwarders, add **208.67.222.222**, **208.67.220.220**, **208.67.220.222**, and **208.67.222.220** as your new forwarders

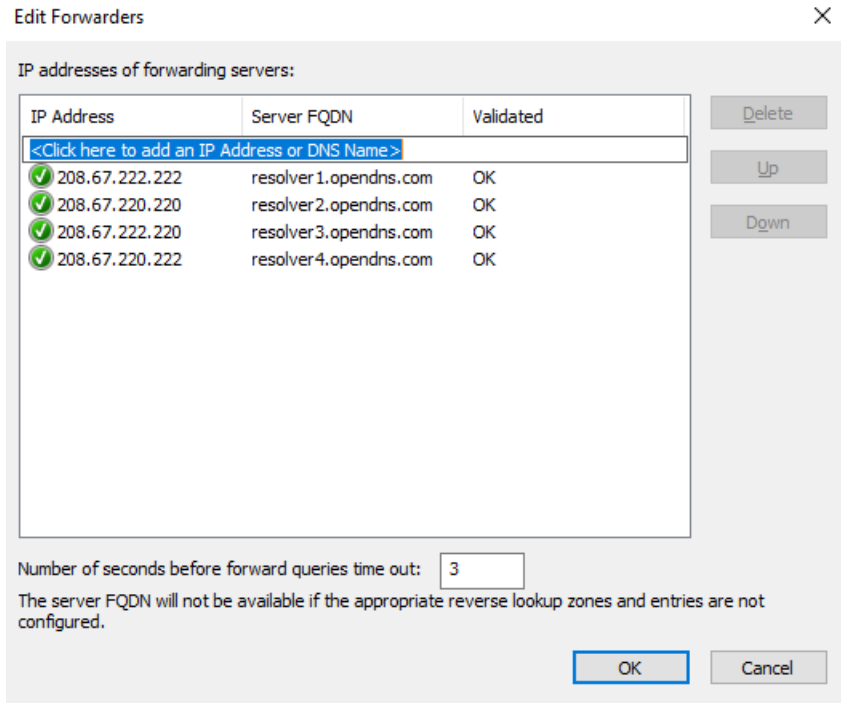

6. Click **OK** > **OK** > **Close your DNS Manager**
7. Do this on **every server that has DNS installed**

Local IP Level Filtering

A second level of OpenDNS implementation requires installation of multiple virtual appliances on virtual hosts within your network. Best Practices call for installing at least two appliances on two separate

physical hosts for redundancy and fault protection. These appliances allow for more detailed reporting, and custom filtering.

Virtual Appliance Requirements

Virtual Appliances (VAs) are needed for detailed reporting and identity information, Active Directory Integration, and granular Policy Management. Listed below are the requirements needed for the VAs to work.

1. **2 VAs per Site** – In order for automatic updates to occur without downtime and for redundancies sake at the DNS level, you must have two VAs per site, each on separate Hypervisor servers.
2. **VA Specs** – Each VA requires the following resources:
 - a. **1 Virtual CPU**
 - b. **1024 MB of RAM Recommended** (minimum 512MB)
 - c. **7GB of disk space**
NOTE: The above resources allow each VA to process millions of DNS requests per day. It is estimated that 1 VA with the above mentioned amount of resources can serve over 100,000 endpoints.
3. **Correct Date/Time** – The incorrect date or time can cause update or sync issues with the VAs. Ensure your Hypervisor host has the correct date and time. The VA syncs time independently and is always set to UTC.
4. **VMWare or Hyper-V** – The VAs can run either on VMware or Hyper-V
 - a. **VMware** requires ESX or ESXi 4.1 update 2 (or newer)
 - b. **Hyper-V** requires one of the following Windows Server Operating Systems:
 - i. **Windows Server 2012, SP1, or R2 (Standard or Datacenter), 2016, or 2019 with Hyper-V role**
 - ii. **Hyper-V Server 2012, 2012 R2, 2016, or 2019**

VA Networking Requirements

Once VAs are deployed and ready to be utilized, endpoint clients must exclusively resolve DNS through the VAs and not your local DNS forwarders. This is usually accomplished through the network's DHCP configuration. The following firewall/ACL requirements ensure VAs can communicate with the Umbrella cloud services and local DNS forwarders/servers.


Port and Protocol	Source	Destination	Note
53 TCP + UDP	Virtual Appliance	Local DNS servers	Standard DNS traffic for internal domains.

53 TCP + UDP 443 TCP + UDP 5353 TCP + UDP	Virtual Appliance	<p>Umbrella resolvers</p> <p>Default:</p> <ul style="list-style-type: none"> 208.67.220.220/32 208.67.222.222/32 <p>If you have configured the VA to use other Umbrella resolvers:</p> <p>Alternate:</p> <ul style="list-style-type: none"> 208.67.220.222/32 208.67.222.220/32 <p>IPv6:</p> <ul style="list-style-type: none"> 2620:119:35::35 2620:119:53::53 <p>US-only:</p> <ul style="list-style-type: none"> 208.67.221.76/32 208.67.223.76/32 <p>US-only IPv6:</p> <ul style="list-style-type: none"> 2620:119:17::76 2620:119:76::76 	<p>Standard and encrypted DNS queries to Umbrella resolvers.</p> <p>Port 443 is used as failover if your firewall does not allow DNSCrypt on port 53.</p> <p>Port 5353 is used as failover if DNSCrypt is not allowed on port 53 and port 443.</p>
443 TCP	Virtual Appliance	<ul style="list-style-type: none"> api.opendns.com (67.215.92.210 146.112.255.152/29) ocsp.digicert.com crl4.digicert.com cisco.com 	<p>HTTPS—Used for registration, health checks, and updates from Umbrella.</p> <p>ocsp.digicert.com and crl4.digicert.com use a CDN and are not assigned static IP addresses, thus are subject to change.</p> <p>Currently, these domains resolve to the following IPs:</p> <ul style="list-style-type: none"> 72.21.91.29 117.18.237.29 93.184.220.29 205.234.175.175
80 TCP	Virtual Appliance	<ul style="list-style-type: none"> ocsp.digicert.com crl4.digicert.com 	<p>HTTP—Used for fetching the SSL revocation list to initiate the HTTPS connection.</p>
443 TCP	Virtual Appliance	disthost.umbrella.com	Updates to the VA
Port and Protocol	Source	Destination	Note
22 25 53 80 443 or 4766 TCP	Virtual Appliance	s.tunnels.ironport.com	Required for the customer-initiated SSH support tunnel. For more information, see On-Demand Tech Support SSH Tunnel for Virtual Appliances .
123 UDP	Virtual Appliance	<p>NTP servers</p> <p>Default:</p> <ul style="list-style-type: none"> ntp.ubuntu.com (91.189.94.4/32 91.189.89.199/32 91.189.91.157/32 	NTP—Protocol to synchronize time.


		<ul style="list-style-type: none"> 91.189.89.198/32) <p>If you have configured custom NTP servers on the VA, use those IPs instead.</p>	
443 TCP	Chromebook client	Virtual Appliance(s)	Required for Chromebook client trusted network feature .
443 TCP	Umbrella AD Connector	Virtual Appliance(s)	Used to send user/IP mapping (one-way) from the Active Directory (AD) connector to the VA .

Download Virtual Appliance:

1. Create a folder called **openDns** to download the necessary files to.
2. Navigate to **Unmbrella.com** and login. Then navigate to **Deployments > Sites and Active Directory** (under Configuration).
3. At the top of the screen click **“Download Components”**

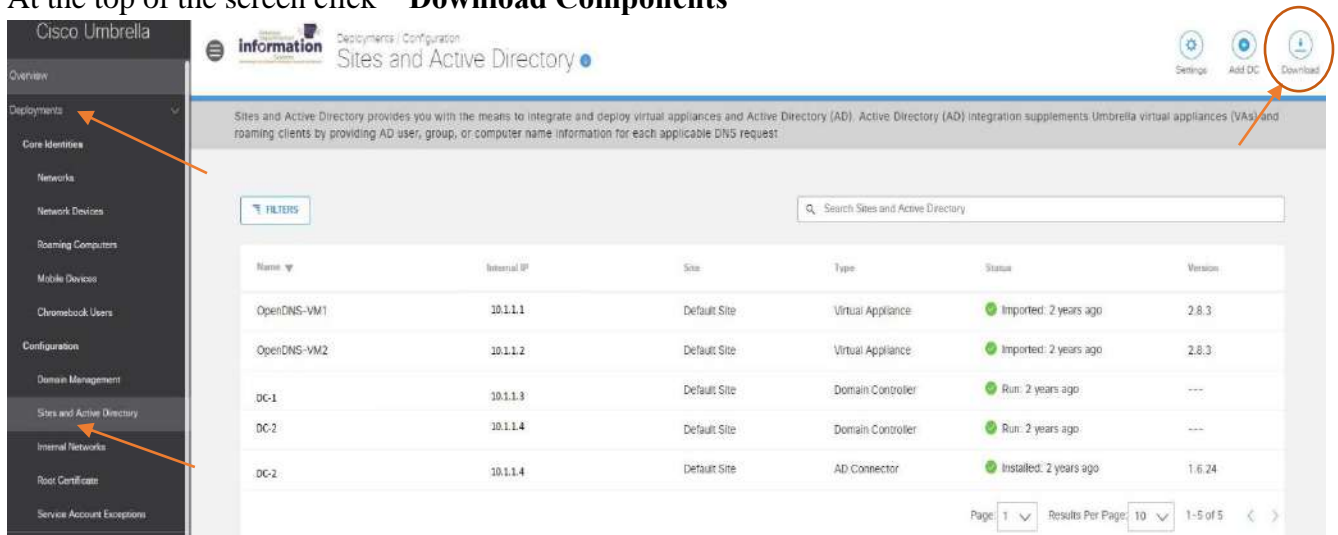

- Depending on whether you're using VMWare or Hyper-V, download the appropriate "VA for"

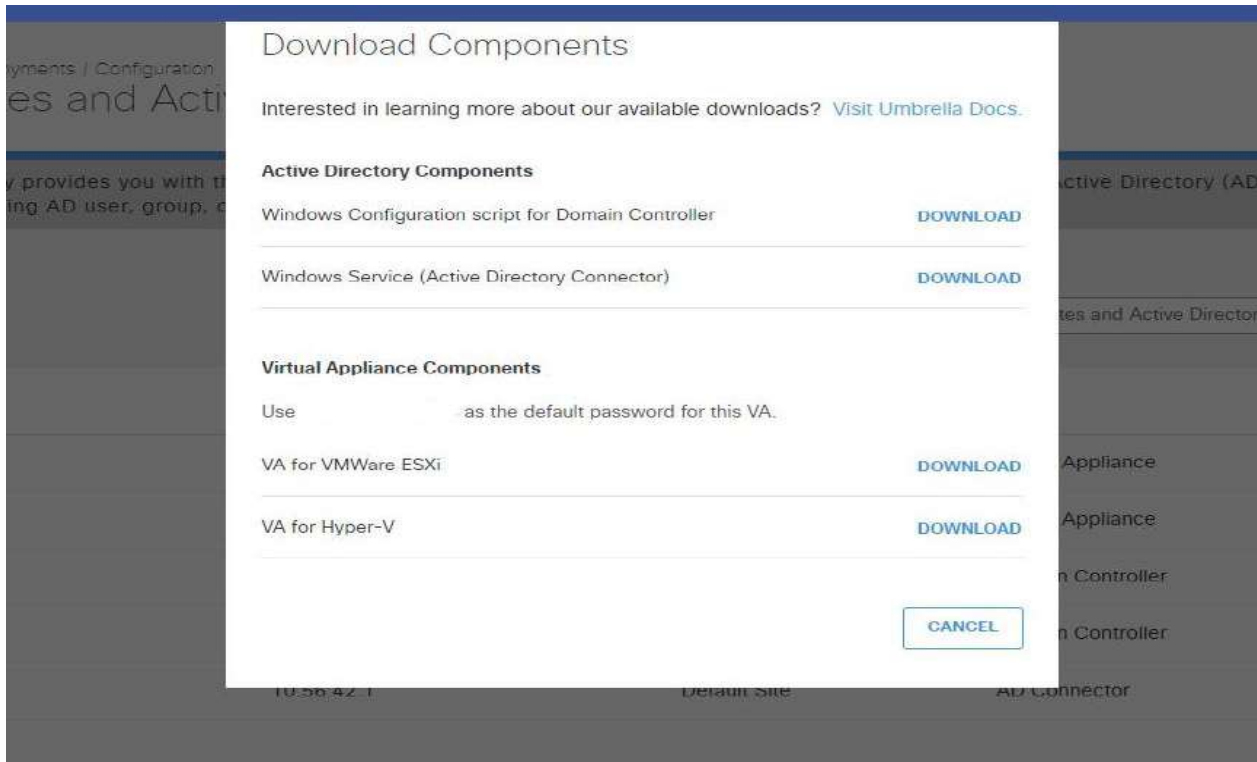

- If you plan to integrate Active Directory to your system, Download the **Windows Configuration** script and **Windows Service** (see Configure Active Directory)


Each new school must download their own files from their Umbrella Portal as the files are tagged to that school when downloaded.

Hyper-V Virtual Appliance Deployment

To deploy the VA in Hyper-V for Windows Server it is best to create a new VM and attach the Hard Disk after the fact. For Server 2012 R2 it is mandatory.

- Select your Hyper-V Server Name on the left and then select **New > Virtual Machine** in the **Actions** menu along the right side of **Hyper-V Manager**
- Click **Next** on the **Before You Begin** page if you get that
- Name the VA with the format **SCHOOL-VA** followed by the number for the VA.
 - If this is your first VA then the name should be **YOURSCHOOL-VA1**.
 - Check the **Store the virtual machine in a different location**

- c. Navigate to the location where VM's are stored on this network

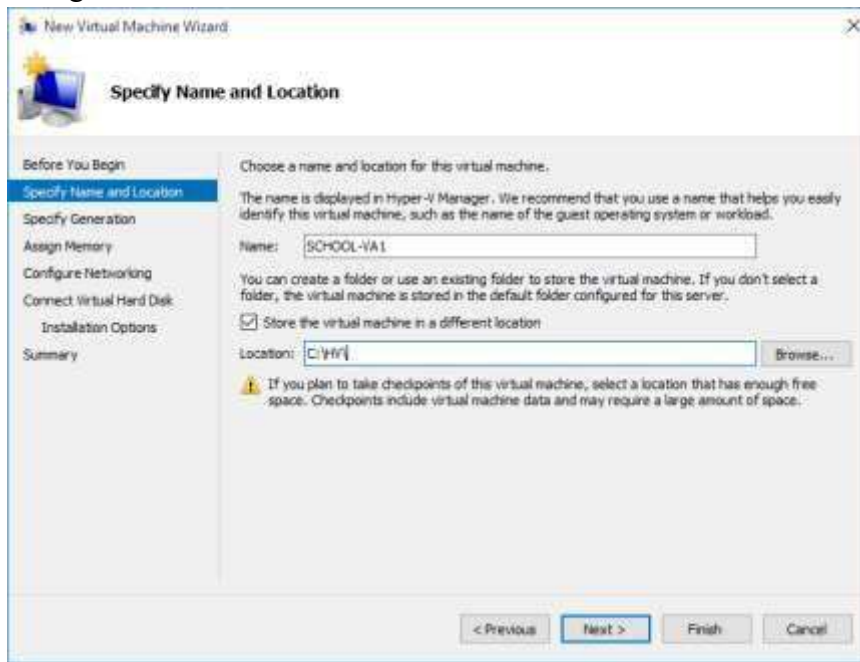


4. Click **Next**
5. Make sure **Generation 1** is selected. The VA's are built using this format. Click **Next**
6. Assign **1024MB** of RAM to the VM. As mentioned in the VA Requirements section, 512 MB is estimated to serve 100,000 endpoints a day. Click **Next**
7. Select your Network Adapter and click **Next**
8. Select the option at the bottom: **Attach a virtual hard disk later** and click **Next**
9. Click **Finish**


Now we need to copy the .VHD files you downloaded in the Prerequisite section to the newly created VM location and configure the VM Settings.

1. Find the file you downloaded all of your Prerequisite files to. Find a .zip file named **OpenDNSVirtualMachine-20151203** and extract it.
2. Open the newly extracted file and **Copy** the **Virtual Hard Disks** folder.
3. Navigate to the folder containing the VM on the Hyper-V Server (The location assigned in step 3 of the previous section.)
4. **Paste** the **Virtual Hard Disks** folder into the folder named after the VM you created.

- Go into the **Virtual Hard Disks** folder and rename the two .VHD files to **dynamic-va-1** and **forwarderva-1** (change the 1 to a 2 if this is your second VA)

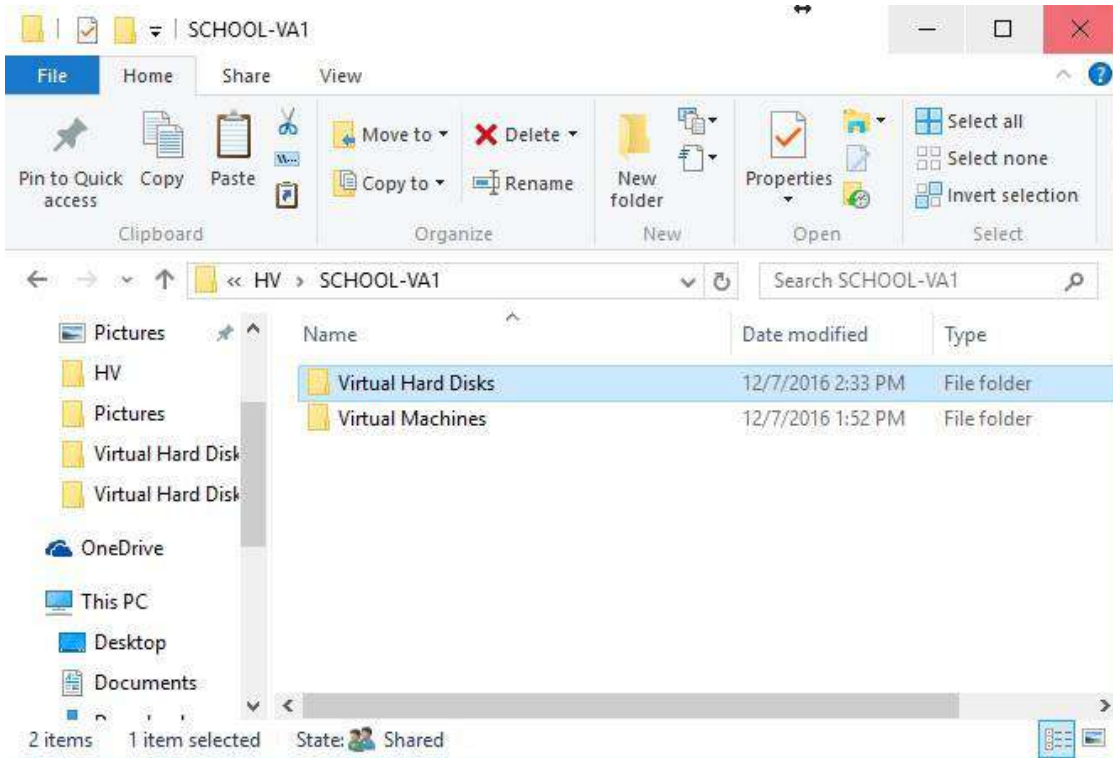


- Go back to your **Hyper-V Manager**
- Right Click** the VM that you created and go to **Settings**
- Select **IDE Controller 0**
- Make sure **Hard Drive** is selected on the right hand side and click **Add**

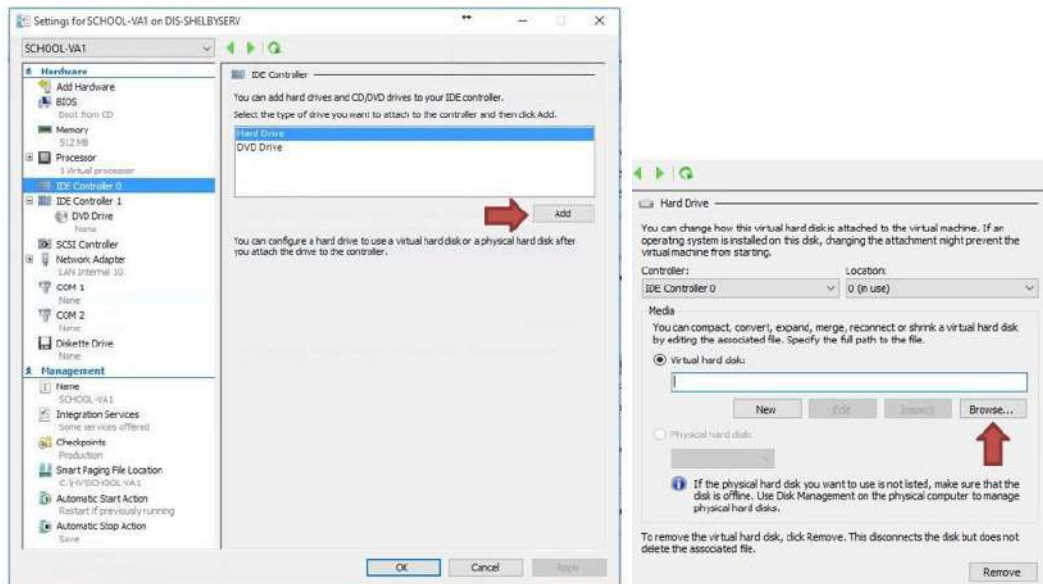

- Click **Browse** and navigate to the location of the hard drives you just copied above.
- Select **forwarder-va-1** (or **-2**) and click **Open**

12. Repeat steps 8-10 for the **dynamic-va-1**

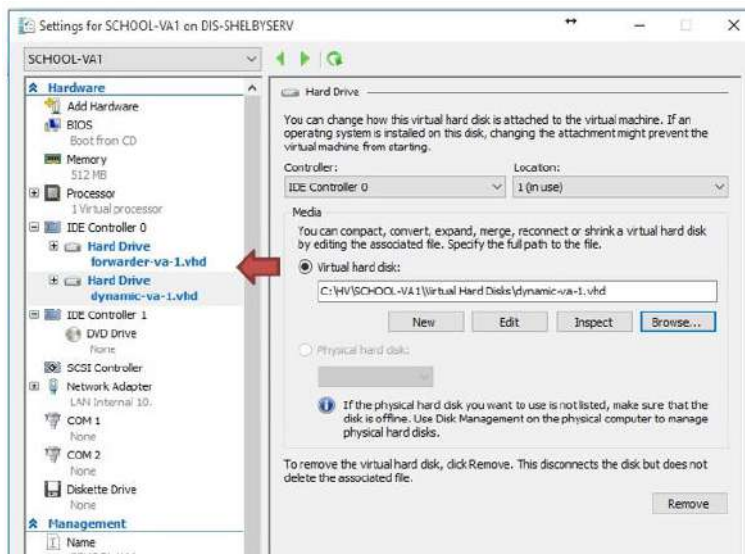


13. Click **Apply** and **OK**

NOTE: **forwarder-va-1** must be the first drive (location 0)!!


VMWare Virtual Appliance Deployment

1. Log into your VMware vSphere client and select the 'File' tab.
2. Click Deploy OVF Template, choosing the .OVA template downloaded from the Umbrella dashboard.

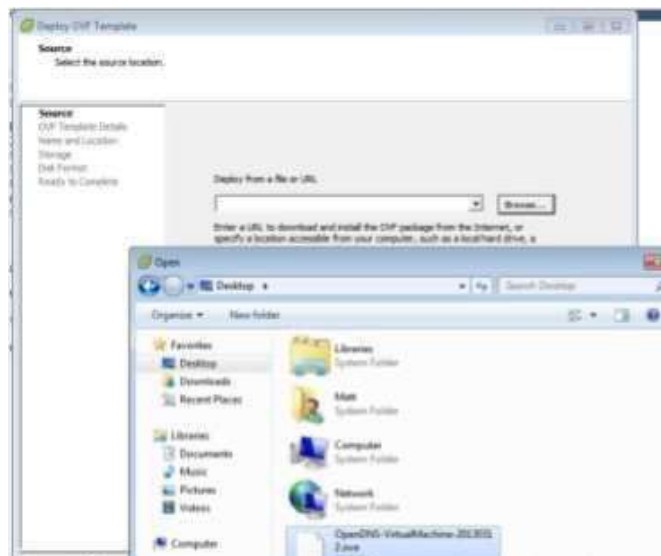


3. Follow the deployment wizard prompts, but be sure to follow these key steps:

-For the **source**, browse to the **.ova** file you downloaded during the Prerequisite section. -Specify a unique name and location of your Virtual Appliance

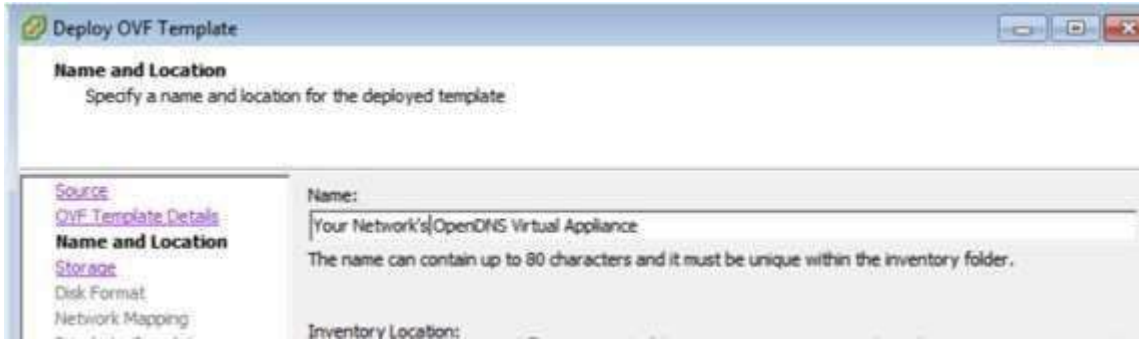


4. Next, select the disks appropriate to your environment and during the disk format, making sure to select

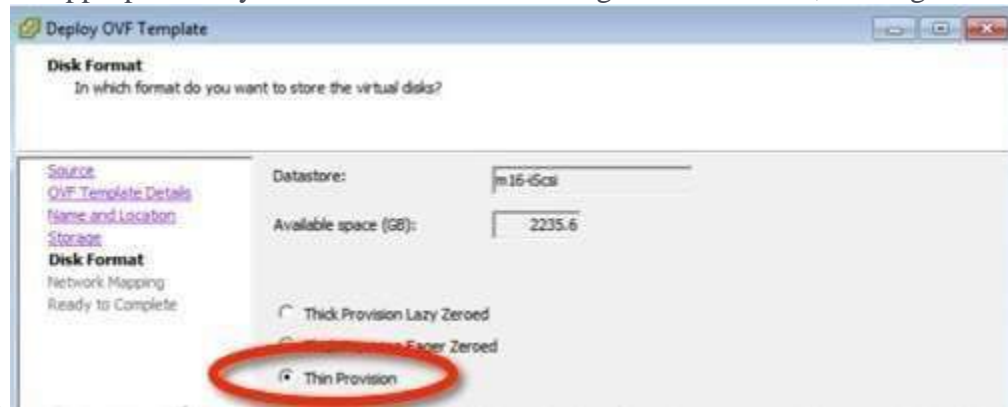

Thin Provision.

5. Next, select or map a network:

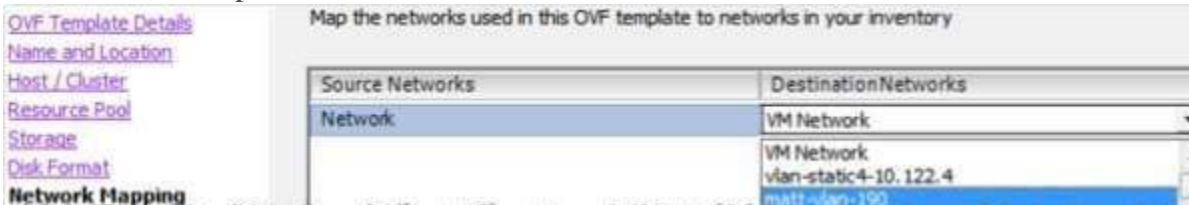

6. Click **Finish**.

The systems will begin deploying the Virtual Appliance and subsequent prompts will update you regarding the status.

Configure the Virtual Appliances

It's time to configure the VAs. You will need the following information.

1. **Right Click** the VM and click **Connect**
2. At the top of the new window select the **Green Power Button**
3. Let the VM load until you see the following image (If you have DHCP it will automatically obtain an IP, my example does not)

```
System
-----
Forwarder Status
-----
Name:                               Services
MAC: 00:15:5d:58:0a:00              forwarder [1158]
IP: 0.0.0.0                          sync [disabled]
Netmask: 255.255.255.0
Gateway:
Connectivity
This DNS Server: DNS ok
Local DNS Servers: Unconfigured
Umbrella DNS Servers: Tests incomple$
AD Connector: Unknown
Remote Support Tunnel: Disabled
Umbrella Cloud: SSL failed
Updates: Connect failed

0 domains

Version: 2.4.4
```

4. Press **Ctrl+B** to enter Config Mode

```
Remote support tunnel: Disabled
Umbrella Cloud: SSL failed
Configuration
-----
Are you sure you want to enable the Config Mode?
Default password for this VA is Umbrella<Org ID>.
The Org ID can be retrieved from your Umbrella dashboard after you sign in.
For instance, if your Org ID is 2306646, the default password will be Umbrella2306646
YES NO
```

5. You will find your Org ID in the URL of your Umbrella Dashboard. In the example below the

Org ID is 2385312

← → ↻ <https://dashboard.umbrella.com/o/2385312/#/deployments/configuration/adconfiguration>

6. Enter the default password, in this example I will use ***Umbrella2385312*** (you won't see any text when typing the passwords)

```
If you have forgotten the password, please reset it from the Umbrella dashboard.
Password: _
```

7. Once logged in, you will be prompted to change the password. ***First you will enter the default password again. Umbrella2385312***

```
*****
You have logged in with the default password.

Re-enter the default password at the prompt of `(current) UNIX password`.

New Password should satisfy the following criteria:
- Different from the default password.
- Minimum 8 characters long.
- Atleast one lowercase ,one uppercase letter and an integer.

Use special character in password only if your keyboard layout is "English(United States)"

*****

You are required to change your password immediately (root enforced)
Changing password for vmadmin.
(current) UNIX password: _
```

8. Then you will enter your new password. Must be complex password.

```
You are required to change your password immediately (root enforced)
Changing password for vmadmin.
(current) UNIX password:
New password: _
```

9. Retype the new password

```
You are required to change your password immediately (root enforced)
Changing password for vmadmin.
(current) UNIX password:
New password:
Retype new password: _
```

10. Finally you will be at the config mode prompt.

```
You have entered the Configuration Mode on this VA. Use the 'config' command for any configuration changes.
Type 'help' to get a list of supported commands.
~ $ _
```

11. To set the Virtual Appliance name type: ***config va name School-VA1*** (Use your school name) then press enter

```
You have entered the Configuration Mode on this VA. Use the 'config' command for any configuration changes.
Type 'help' to get a list of supported commands.
~ $ config va name School-VA1_
```

12. After you press enter you will see it sets the name.

```
~ $ config va name School-VA1
name: -> School-VA1
~ $ _
```

13. To set the IP address type: **config va interface <IP address> <Subnet> <Gateway>** then press enter

```
~ $ config va interface 192.168.88.11 255.255.255.0 192.168.88.2_
```

14. After you press enter you will see it sets the IP info.

```
~ $ config va interface 192.168.88.11 255.255.255.0 192.168.88.2
ip: -> 192.168.88.11
netmask: -> 255.255.255.0
gateway: -> 192.168.88.2
~ $ _
```

15. To set the local DNS servers (most commonly your DC's) type **config localdns add <dns1>** then press enter, type **config localdns add <dns2>** then press enter. Each DNS server has to be added with the command individually.

```
config localdns add 192.168.88.10
```

```
config localdns add 192.168.88.11
```

16. After you press enter you will see it sets the local DNS

```
Localdns Server 192.168.88.10 is added successfully
```

```
Localdns Server 192.168.88.11 is added successfully
```

17. That completes the config process, type **exit** to exit the config mode

```
~ $ exit_
```

18. You will now see that your VA is fully configured.

```
Forwarder Status
-----
Name: School-VA1                Services
MAC: 00:15:5d:58:0a:00         forwarder [1158]
IP: 192.168.88.11              sync [3081]
Netmask: 255.255.255.0
Gateway: 192.168.88.2

Local DNS 1: 192.168.88.10
Local DNS 2: 192.168.88.11

Connectivity
This DNS Server: DNS ok
Local DNS Servers: All DNS ok
Umbrella DNS Servers: All DNS ok
AD Connector: Unknown
Remote Support Tunnel: Disabled
Umbrella Cloud: SSL ok
Updates: SSL GET ok

19 domains

Version: 2.4.4
```

NOTE: If **Support Tunnel: SSH** is red and says failed, it may take a little longer for it to make a connection. It won't hurt anything if it doesn't at all. This tunnel is for OpenDNS techs to be able to remote into your VA to assist you if you request it.

It is also normal to see the "AD Connector: Unknown" message, as the *optional* Active Directory integration has not been configured as of yet.

Repeat Steps for the second VA

Repeat the above steps to configure a second VA. A second VA is required for continuous operation, high availability, and automatic upgrades. Do not clone the first VA. Umbrella will not recognize a cloned VA.

Warning

Umbrella VAs cannot be cloned. Ensure that your second VA is set up manually. Umbrella will not recognize a cloned VA.

Local IP and Active Directory Filtering

Finally, OpenDNS can be fully linked to your Active Directory structure. This option provides you with the most detail in reporting and identity.

Prerequisites

- Windows Server 2012, 2012 R2, 2016 or 2019 with the latest service packs and 100MB free hard disk drive space. Service packs prior to SP2 are not supported.
- .NET Framework 4.5, or 4.7.
.NET Framework 3.5 should not be running on the same system. If .NET Framework 3.5 is required, confirm that all Windows patches on this server are applied.
- If a local anti-virus application is running, allow list the OpenDNSAuditClient.exe and OpenDNSAuditService.exe processes.

Create AD User:

If you are going to use the AD connector then a user needs to be created and assigned to specific groups for the connector to access AD.

1. Open **Active Directory Users and Computers** and Navigate to **YourDomain.local > Users**
2. **Right Click > New > User**
3. Make the *User logon name*: **OpenDNS_Connector**
4. When creating the password, do not use a backslash or quotation marks.




Once the user is created, add the user to the following groups by **right clicking the user > Properties > Member Of tab > Add**

- a. **Event Log Readers**
- b. **Distributed COM Users**
- c. **Enterprise Read-only Domain Controllers**

Click **Apply** and **OK**

NOTE: Make the user exactly like the picture.

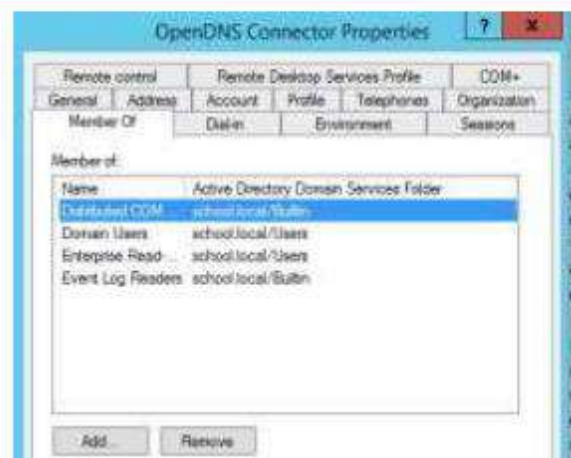


DCOM Permissions

Even though we have added the new user to the correct member groups in AD, we need to manually add the OpenDNS_Connector user permissions. This may seem redundant but sometimes, even though the user is part of the groups, they don't always get the permissions needed. Let's start with the DCOM permissions.


1. Open a **CMD Prompt** and type **DCOMCNFG**




1. When the new window opens, expand **Component Services** and click on **Computers**. **Right Click** on **My Computer** and select **Properties**

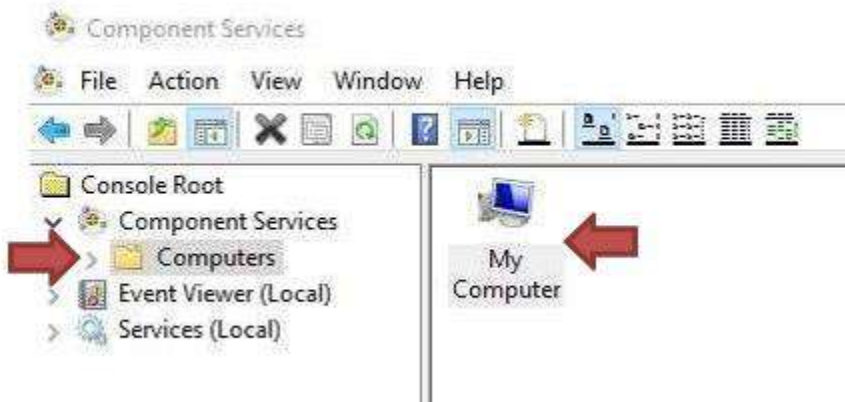


2. In the new properties windows, click the **COM Security** tab

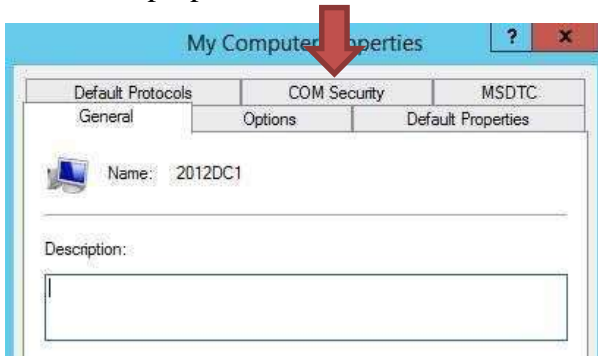


3. Under the **Launch and Activation Permissions** section, click on **Edit Limits...**

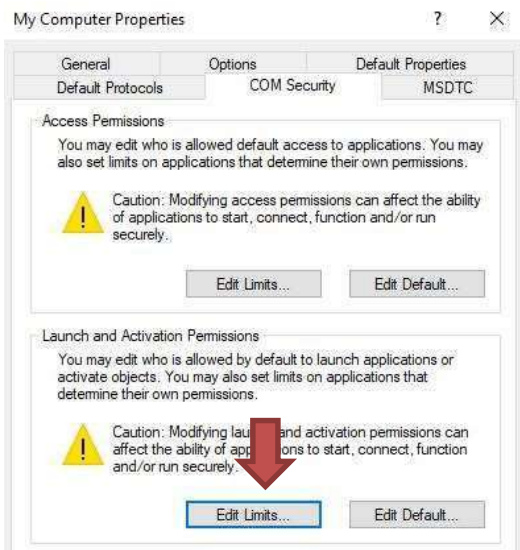

4. Select **Add..** then type in **OpenDNS_Connector** in the box and click **Check Names** and **OK**

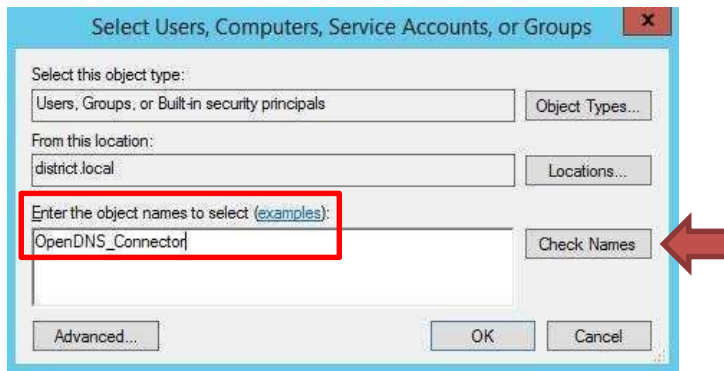

5. Select the **OpenDNS_Connector** user and put a check mark in all four boxes below.

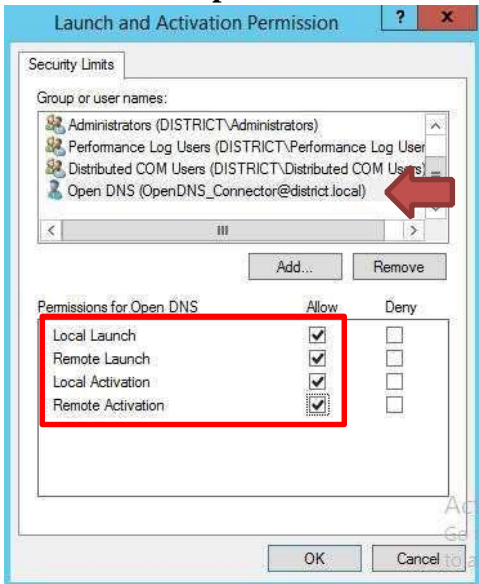

6. Click **OK** > **OK** > **Close** the **Component Services** window.

7. **Restart** the machine.

WMI Permissions


1. Open a **CMD Prompt** and type **WMIMGMT** and press **Enter**



2. When the **WmiMgmt** window opens, right click on **WMI Control (Local)** and select **Properties**




3. Select the **Security** tab, **expand Root**, **highlight CIMV2**, then click the **Security** button at the bottom on the window

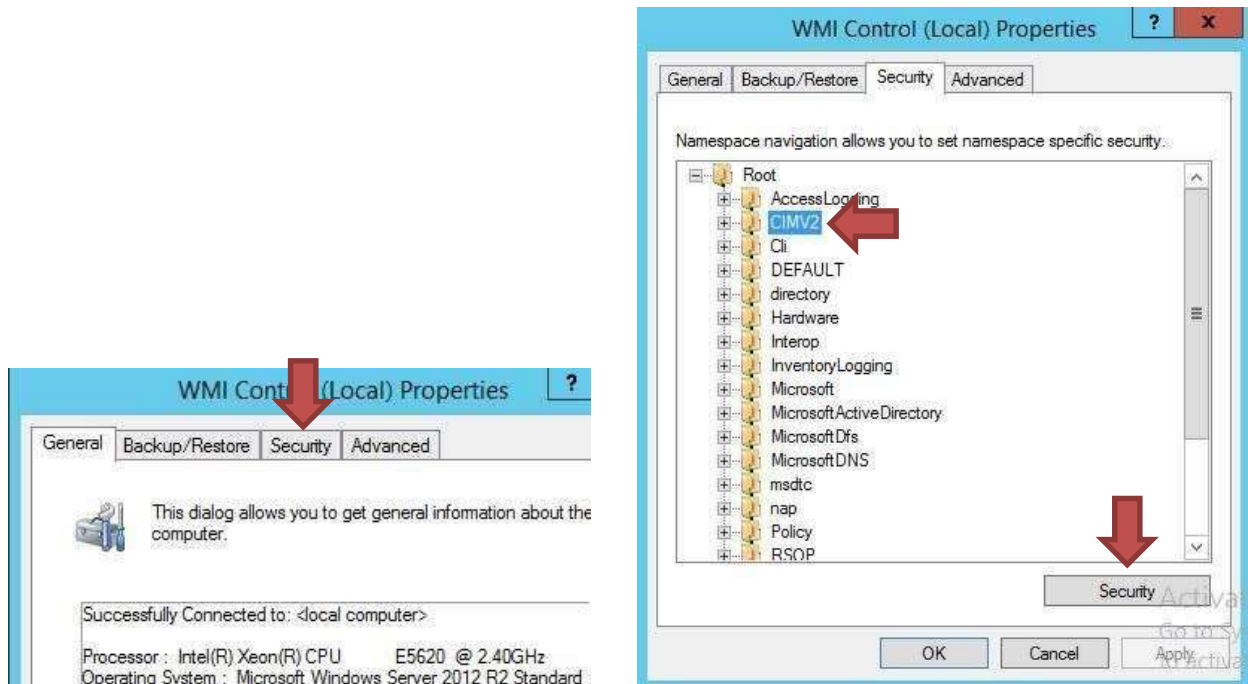

- Verify that the **OpenDNS_Connector** user is listed with the following permissions:
 Enable Account: Allow
 Remote Enable: Allow
 Read Security: Allow

If it is not, then **add** it with these permissions.

- Click **OK > OK > Close the WmiMgmt** window.

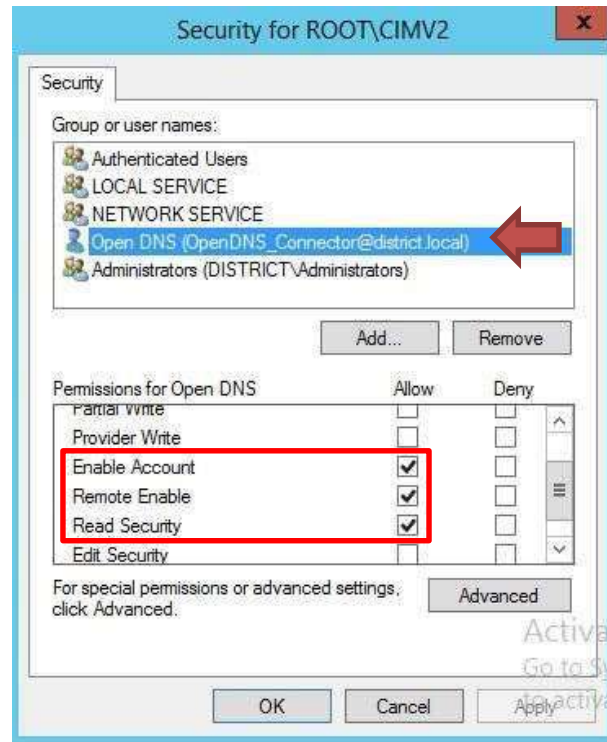


Active Directory Integration

Configure DNS

It's time to prepare your network for Active Directory Integration. You will want to create PTR and A records for your VAs on your DNS servers.

- Open your **Server Manager** on your Primary DNS server
- Click **Tools > DNS**
- Expand your **server name > Forward Lookup Zones**
- Right Click** your domain and select **New Host (A or AAAA)**
- In the first box put the **name** of the VA that you used when you configured it.
- In the IP Address: box put the **IP** used during the configuration.
- Make sure **Create associated pointer (PTR) record** is checked
- Click **OK**.

9. Repeat steps 4-8 to add your second VA.

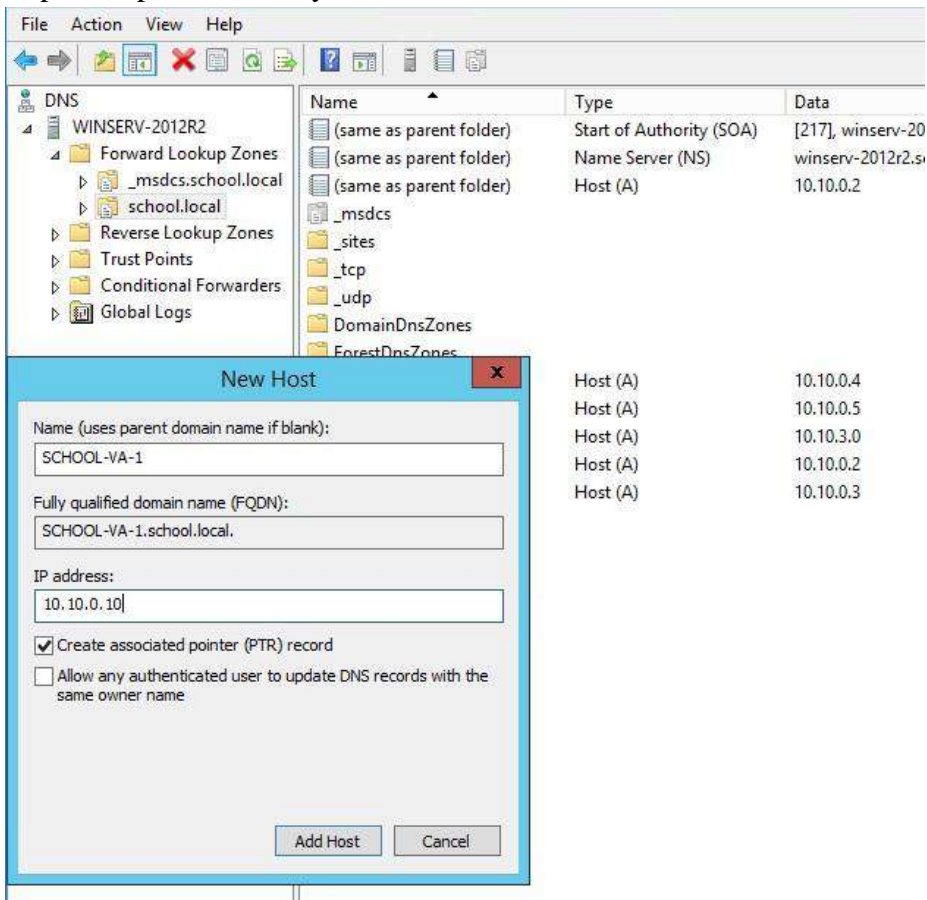


Do an **nslookup** in Command Prompt using the **IP** of the VA followed by another using the **NAME** of the VA to test that the records are created correctly and functioning.



Configure Active Directory

Now we need to configure Active Directory to prepare it for the Connector. In order to do so we need to run a script that you downloaded during the Prerequisite portion of this guide. Make sure your openDns folder that you downloaded all of your prerequisite files to, is in the Downloads folder or a folder easy to navigate to. For this guide we will use the Downloads folder.


1. Open an **ADMIN** CMD Prompt on your server and navigate to your **openDns folder** inside your **Downloads** folder. (CMD: **cd Downloads/openDns**)
2. Type: **cscript OpenDNS-WindowsCon** and press the **Tab** button to auto fill the rest of the name or manually complete the name and press **Enter**.



```
Administrator: Command Prompt
Microsoft Windows [Version 6.3.9600]
(c) 2013 Microsoft Corporation. All rights reserved.
C:\Users\Administrator>cd Downloads/openDns
C:\Users\Administrator\Downloads\openDns>cscript OpenDNS-WindowsConfigurationScript-20130627.wsf_
```

3. The script will display your current configuration, then offer to auto-configure the Domain Controller.

Press **Y** and **Enter**.

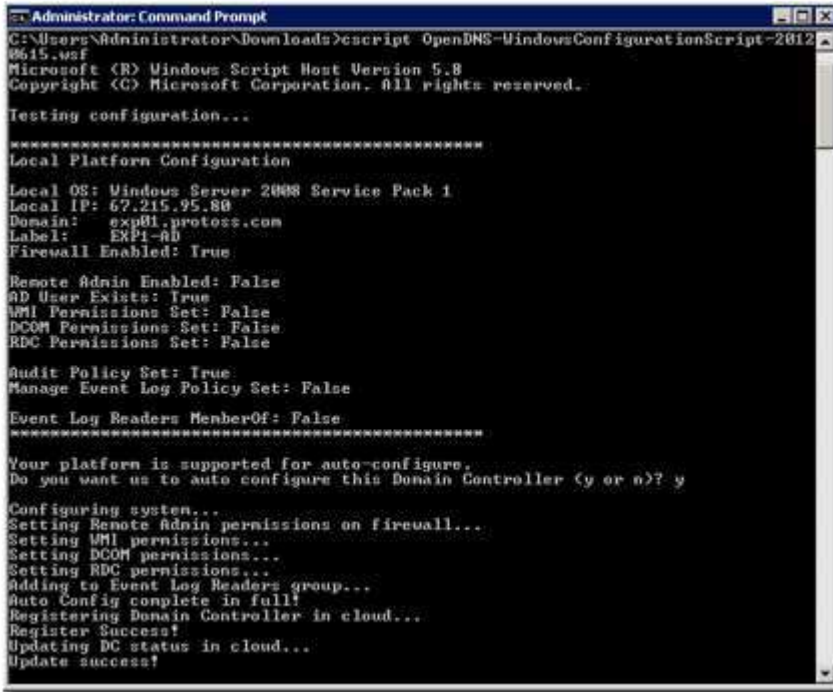

```
Administrator: Command Prompt
C:\Users\Administrator\Downloads>cscript OpenDNS-WindowsConfigurationScript-20130627.wsf
Microsoft (R) Windows Script Host Version 5.8
Copyright (C) Microsoft Corporation. All rights reserved.
Testing configuration...
*****
Local Platform Configuration
Local OS: Windows Server 2008 Service Pack 1
Local IP: 67.215.95.80
Domain:   exp01.proteos.com
Label:    EXP1-00
Firewall Enabled: True

Remote Admin Enabled: False
AD User Exists: True
WMI Permissions Set: False
DCOM Permissions Set: False
RDC Permissions Set: False

Audit Policy Set: True
Manage Event Log Policy Set: False

Event Log Readers MemberOf: False
*****
Your platform is supported for auto-configure,
Do you want us to auto configure this Domain Controller (y or n)? y

Configuring system...
Setting Remote Admin permissions on firewall...
Setting WMI permissions...
Setting DCOM permissions...
Setting RDC permissions...
Adding to Event Log Readers group...
Auto Config complete in full!
Registering Domain Controller in cloud...
Register Success!
Updating DC status in cloud...
Update success!
```

4. Copy the script to each one of your **DCs** and repeat steps 1-3 to fully prepare your AD environment for the connector.
5. Verify your AD Server shows up in the OpenDns Dashboard.

Connect Active Directory

The next step is to install the Active Directory Connector now that the VAs have been installed and the Script has been ran on ALL of your DCs. You will need the password to the OpenDNS_Connector user that you configured at the beginning of this guide. You only need one connector per site.


1. Open the openDns folder that houses all of your Prerequisite files. Find the .zip file **OpenDNS-WindowsService-20160128.zip** and extract it.
2. Once extracted, open the folder and run the **setup.msi**
3. When prompted, enter the password you used to configure the user **OpenDNS_Connector** in the Prerequisite section of this book.
4. Follow the setup wizard prompts and click **Close** when finished.
5. Verify that the server name you installed the connector on shows up in the OpenDns Dashboard (Settings > Sites and Active Directory) and that in the **Type Column** it shows **AD Connector** next to it.

NOTE: You can verify that the integration is complete by verifying that the jellies in the status column of **Sites and Active Directory** in the **Dashboard** are showing green in all boxes, especially the AD Connector box and the AD Server Box. It may take a few minutes for them to turn green and the import to show results. Once they are green you can verify further by going to **Policies > Policy List** and creating a **new Policy** and confirming that your groups are present.


Setup DHCP

Now that you have your VAs installed and configured, your AD is integrated into the Umbrella Dashboard, and your Policies List is setup the last thing you need to do is configure your DHCP to handout your new VAs as the DNS servers for your network.


1. On your **DHCP Server** open **Server Manager > Tools > DHCP**
2. Expand your **Server Name > IPv4**

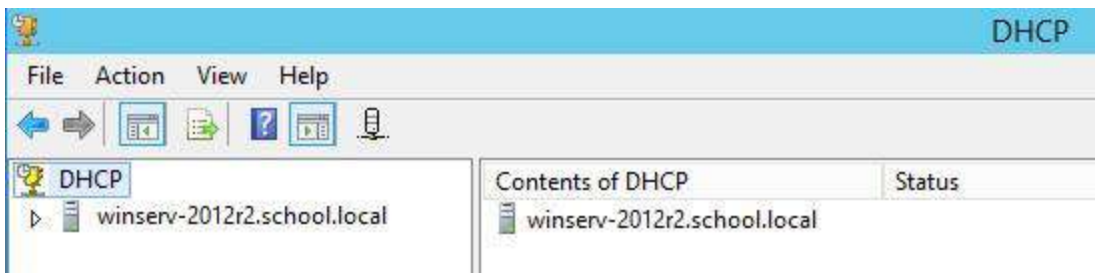

3. Left Click on **Server Options** in order to get the right click menu to be available. 4. Right Click **Server Options** and select **Configure Options**

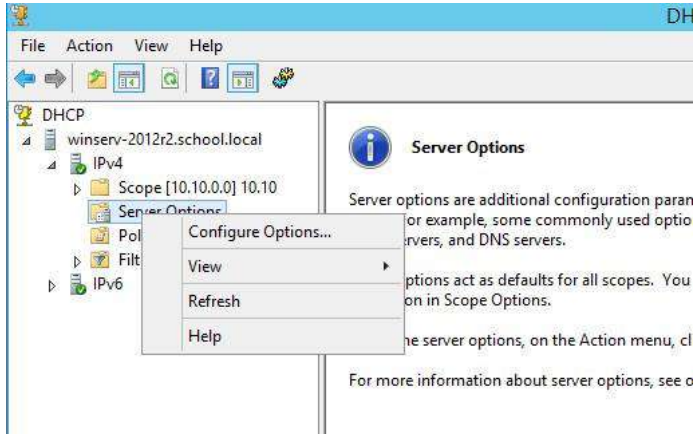

5. Put a check in the box next to **006 DNS Servers**
NOTE: If there is already a Check Box here just delete and servers already listed.
6. Either put the name of the VA in the Server Name: box and click resolve or enter the IP Address in the box below it and click Add.
7. Repeat Step 6 for your second VA.

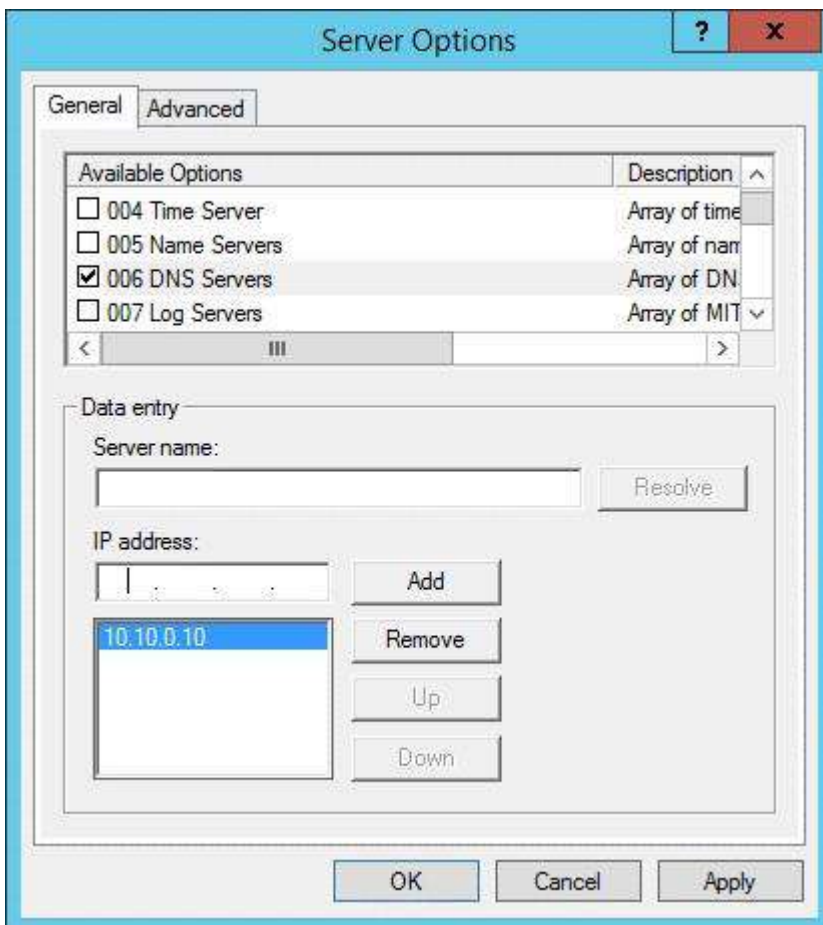

8. Click **Apply** and **Ok**

NOTE: Depending on your lease time, after updating the DNS Servers in the DHCP options, wait for DHCP leases on the endpoints to expire and see the new changes. In most cases, DHCP lease durations are 7 days or less, but sometimes may be set to higher values.

Final Configuration

Configure Internal Network

Internal Networks allows to you manage your Umbrella policy for subnets of computers based on the internal IP addresses of your network.


After an Umbrella Virtual Appliance (VA) has been deployed, an Internal Networks identity can be configured. To set this up, drop one of our lightweight VAs into your network, direct your DNS traffic through it, and start mapping your network based on specific internal IP addresses and/or subnets.

The purpose of the Internal Networks identity is to define a subnet that's non-routable (or RFC1918 compliant) as an identity you can apply policy to. To create an Internal Networks identity, define a subnet that's non-routable (or RFC 1918 compliant) as an identity you can apply policy to. For example, if your Internal Network is defined as 192.168.0/24, any computer, tablet or device with an IP on that subnet would receive the filtering policy defined for it whenever it made a request to access the Internet.


From there you can begin to build multiples sites if you have more than one physical location or if you have more than one Internal Network to configure.

The Umbrella VA will have your DNS traffic pointed to it for this configuration and anything identified as coming from the networks you've defined will have the policies applied.

1. Navigate to **Deployments > Configuration > Internal Networks** and click **Add**.

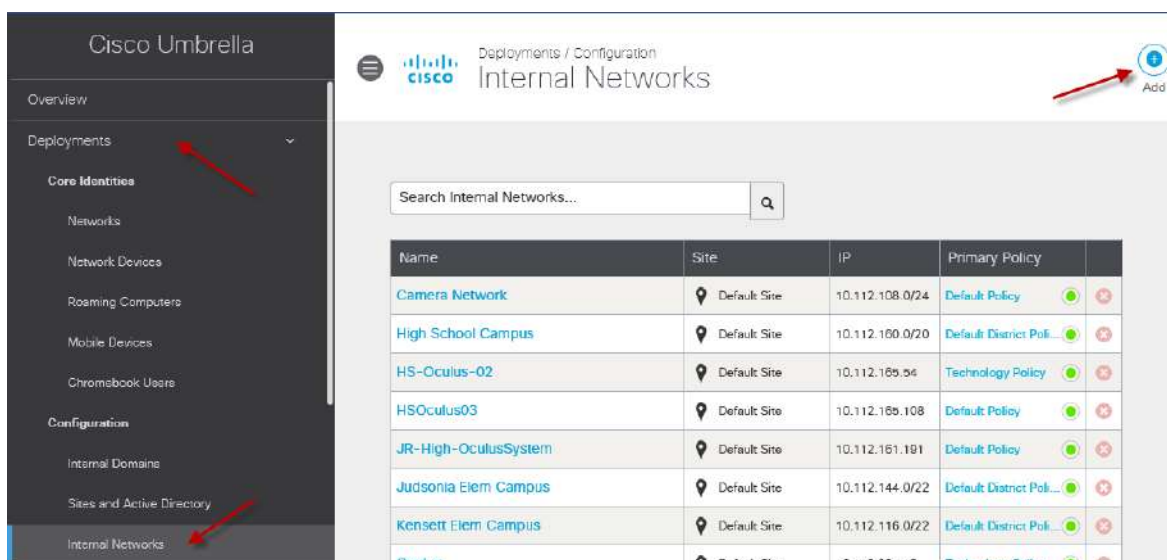

2. You'll be asked to name your network and provide a valid subnet. In this case, we've picked a /24 subnet, so the final octet of the IP will be .0

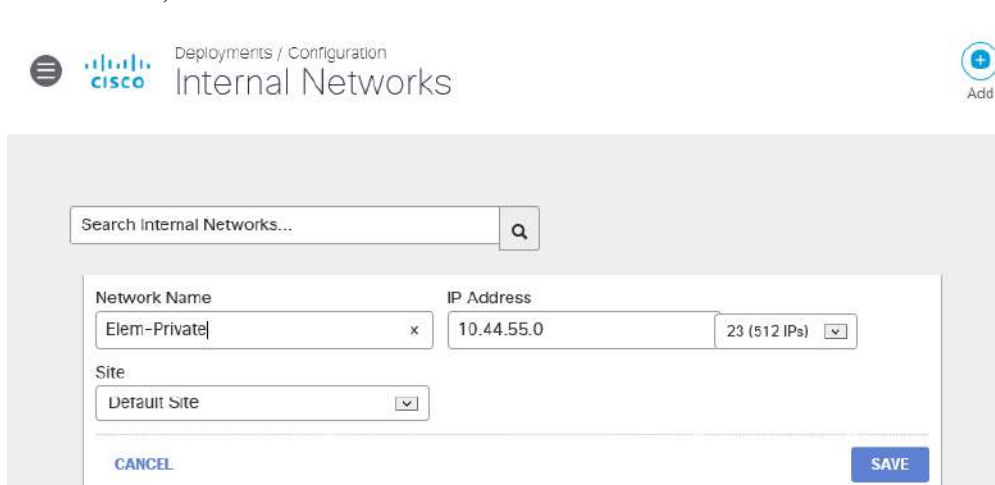

3. Click **Save**.

Note: If you are unable to save your changes, it may be because the Cisco Umbrella Internal Networks setup does not allow an invalid range to be configured. The basic principle is that the final octet of your IP range should match the mask for that range. More information about subnet masks, as well as tools, are easily available from many third-party websites.

You can assign an individual Internal Network policy to a single IP address or to an entire DHCP scope that's already been configured for your network.

Domain Management

1. In the Umbrella dashboard, navigate to **Deployments > Configuration > Domain Management**.

Deployments / Configuration
Internal Domains

Want to route certain domains to your local resolver? You've come to the right place. Click "Add" above to get started.

Note: When you add a domain, all of its subdomains will inherit the setting. For example, if example.com is on the internal domains list, www.example.com will also be treated as an internal domain.

Domain Description

This internal domain applies to:
All Appliances and Devices

CANCEL CREATE

Any DNS queries received by the VAs which match a domain on the Domain Management list, or subdomain thereof, will be forwarded to the local DNS server as described in [Configuring your VAs](#).

The following domains/zones are pre-populated and do not need to be added:

- RFC1918—Non-publicly routable address spaces used only for reverse DNS on internal networks. All local IP address space for reverse lookups (PTR records) is covered with this entry. Adding in-addr.arpa reverse lookup zones is not needed.
- .local—Any domain name with a TLD of .local.

You have a choice of what type of identities are set to respect these internal domains:

- All Appliances and Devices
- Roaming Devices Only
- Virtual Appliances Only

If you do not plan on using Umbrella roaming clients**, you may leave this option at the default setting (All Appliances and Devices). If you plan on using Umbrella roaming clients, we recommend reading the following document and document subsection for more information:

- Appx B. Virtual Appliances
- Appx D. Internal Domains

Which domains should be added?

Any domain name which has a forward lookup zone on your local DNS servers must be added. If you already know which domains to add, [click here](#) to skip this section.

On Windows Server, this information is located in the DNS Manager tool.

1. Open the DNS Manager (Start > Run > and type "dnsmgmt.msc").
2. Expand the Server name and Forward Lookup Zones sections. Any domains listed here are treated as local by your local DNS forwarders and must be added to the Internal Domains section of the Umbrella dashboard. This is a critical part of the setup process.

Configure Policies

Before we convert your network to OpenDNS you might want to setup your filtering Policies. OpenDNS Policies are a top down process, meaning your endpoints will start from the top of the list and work their way through to the bottom. If they do not get blocked by any policy that is linked to them, then they will be allowed access.

The bottom Policy will always be Default Policy and this is the state level policy that blocks Pornography only. It uses the “**Centralized Default Settings**” Category Setting which is managed by the state and can only be edited by the state.

This guide will walk you through setting up your own **District Default Policy** to sit above the **State Default Policy** so that you can manage your bottom level filter. It is recommended that you make this a very restrictive policy to be your safety net at the bottom of your policy list.


Before we can create the Policy itself, we need to create the **Destination Lists, Category Settings, Application Settings, and Security Settings.**

Destination Lists

For each policy you will need **2** Destination Lists, one will be an **Allow** list and the other will be a **Block** list. These two will be your **granular control** on each policy allowing you to Block or Allow websites on a URL basis. If your End Users find a website that is being blocked by a Category in your Policy and you do not want to unblock the whole Category to allow access to this particular website, you would put the website in the Allow Destination list.


1. Navigate to **Policies > Destination Lists**
2. You will see two Destination Lists already exist. **Global Allow List** and **Global Block List**
 - a. The **Global Allow** and **Global Block** will always be attached to every Filter Policy and **cannot be removed**. For this reason, you should be very careful what you add to these two destination lists.
 - b. If you already have a Whitelist or a Blacklist from another filter, you can upload using a **.CSV** file with each domain on a new line, and select **Bulk Upload Domains**.
3. To create a new **Destination List**, click the **small blue plus sign** at the top of the page.

4. Type a **name** and **choose** whether this is an **Allow** or a **Block** list and click **Save**.
5. Create both a **Default Allow** and a **Default Block** Destination List.

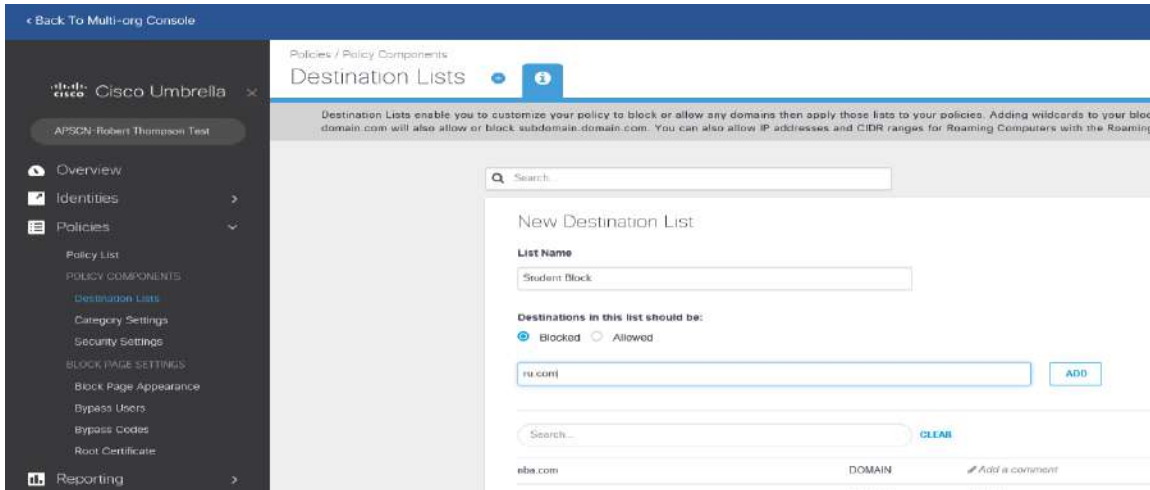

Category Settings

1. In the OpenDns Dashboard, Navigate to **Policies > Category Settings**
2. Here you will be able to VIEW the “**Centralized Default Settings**” Category List **but not edit it**. Another Category List should already exist called **Default Settings**. This one you can edit but not delete so let’s click on it.
 - a. To add your own Category Lists in the future, click the **blue plus sign** at the top of the page.
3. Navigate through the list putting checks in everything that you want blocked in your overall filter.

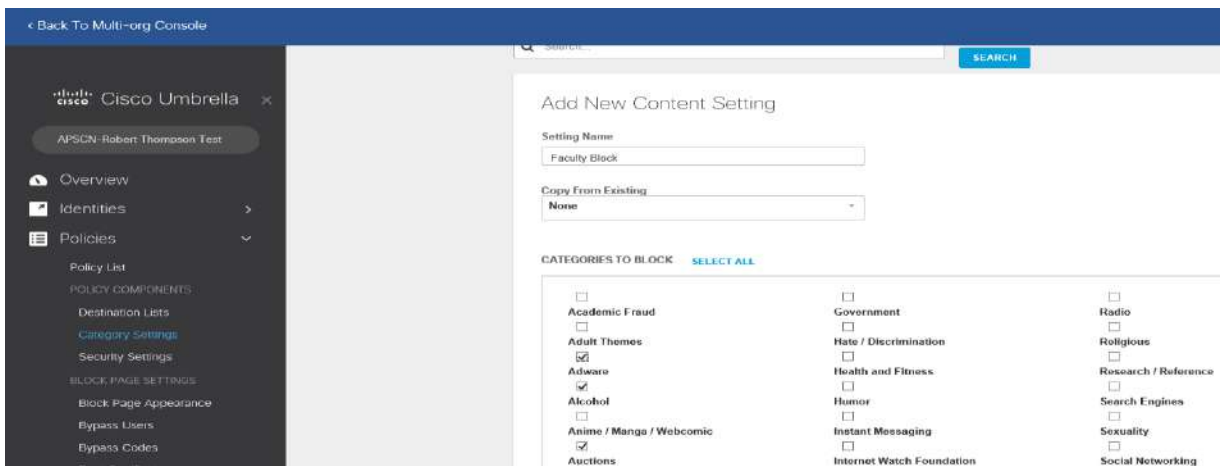

- a. **Always** check **Pornography** when creating **EVERY Category Setting**. This is because once a user authenticates to a Policy in OpenDNS, they are then governed by that policy only. I.E. If Pornography is blocked in every Category Setting for every policy OTHER than your Students, then when students authenticate and pull

the Student Policy, they would be allowed to access porn no matter what policy is above or below them.

- b. This filter will be the Default Filter that devices on your network will get if they do not fit into any Identity Groups in any other filter.

When you have selected all of the Categories that you want blocked by default on your network, click **Save**. Below is the list of all Content Categories.

▲ CONTENT CATEGORIES
Categories [SELECT ALL](#)

<input type="checkbox"/> Adult	<input type="checkbox"/> Hate Speech	<input type="checkbox"/> Private IP Addresses as Host
<input type="checkbox"/> Advertisements	<input type="checkbox"/> Health and Medicine	<input type="checkbox"/> Professional Networking
<input type="checkbox"/> Alcohol	<input type="checkbox"/> Humor	<input type="checkbox"/> Real Estate
<input type="checkbox"/> Animals and Pets	<input type="checkbox"/> Hunting	<input type="checkbox"/> Recipes and Food
<input type="checkbox"/> Arts	<input type="checkbox"/> Illegal Activities	<input type="checkbox"/> Reference
<input type="checkbox"/> Astrology	<input type="checkbox"/> Illegal Downloads	<input type="checkbox"/> Regional Restricted Sites (Germany)
<input type="checkbox"/> Auctions	<input type="checkbox"/> Illegal Drugs	<input type="checkbox"/> Regional Restricted Sites (Great Britain)
<input type="checkbox"/> Business and Industry	<input type="checkbox"/> Infrastructure and Content Delivery Networ...	<input type="checkbox"/> Regional Restricted Sites (Italy)
<input type="checkbox"/> Cannabis	<input type="checkbox"/> Internet of Things	<input type="checkbox"/> Regional Restricted Sites (Poland)
<input type="checkbox"/> Chat and Instant Messaging	<input type="checkbox"/> Internet Telephony	<input type="checkbox"/> Religion
<input type="checkbox"/> Cheating and Plagiarism	<input type="checkbox"/> Job Search	<input type="checkbox"/> SaaS and B2B
<input type="checkbox"/> Child Abuse Content	<input type="checkbox"/> Lingerie and Swimsuits	<input type="checkbox"/> Safe for Kids
<input type="checkbox"/> Cloud and Data Centers	<input type="checkbox"/> Lotteries	<input type="checkbox"/> Science and Technology
<input type="checkbox"/> Computer Security	<input type="checkbox"/> Military	<input type="checkbox"/> Search Engines and Portals
<input type="checkbox"/> Computers and Internet	<input type="checkbox"/> Mobile Phones	<input type="checkbox"/> Sex Education
<input type="checkbox"/> Conventions, Conferences and Trade Shows	<input type="checkbox"/> Museums	<input type="checkbox"/> Shopping
<input type="checkbox"/> Cryptocurrency	<input type="checkbox"/> Nature and Conservation	<input type="checkbox"/> Social Networking
<input type="checkbox"/> Dating	<input type="checkbox"/> News	<input type="checkbox"/> Social Science
<input type="checkbox"/> Digital Postcards	<input type="checkbox"/> Non-governmental Organizations	<input type="checkbox"/> Society and Culture
<input type="checkbox"/> Dining and Drinking	<input type="checkbox"/> Non-sexual Nudity	<input type="checkbox"/> Software Updates
<input type="checkbox"/> DIY Projects	<input type="checkbox"/> Not Actionable	<input type="checkbox"/> Sports and Recreation
<input type="checkbox"/> DoH and DoT	<input type="checkbox"/> Online Communities	<input type="checkbox"/> Streaming Audio
<input type="checkbox"/> Dynamic and Residential	<input type="checkbox"/> Online Document Sharing and Collaboration	<input type="checkbox"/> Streaming Video
<input type="checkbox"/> Education	<input type="checkbox"/> Online Meetings	<input type="checkbox"/> Terrorism and Violent Extremism
<input type="checkbox"/> Entertainment	<input type="checkbox"/> Online Storage and Backup	<input type="checkbox"/> Tobacco
<input type="checkbox"/> Extreme	<input type="checkbox"/> Online Trading	<input type="checkbox"/> Transportation
<input type="checkbox"/> Fashion	<input type="checkbox"/> Organizational Email	<input type="checkbox"/> Travel
<input type="checkbox"/> File Transfer Services	<input type="checkbox"/> Paranormal	<input type="checkbox"/> URL Shorteners
<input type="checkbox"/> Filter Avoidance	<input type="checkbox"/> Parked Domains	<input type="checkbox"/> Weapons
<input type="checkbox"/> Finance	<input type="checkbox"/> Peer File Transfer	<input type="checkbox"/> Web Cache and Archives
<input type="checkbox"/> Freeware and Shareware	<input type="checkbox"/> Personal Sites	<input type="checkbox"/> Web Hosting
<input type="checkbox"/> Gambling	<input type="checkbox"/> Personal VPN	<input type="checkbox"/> Web Page Translation
<input type="checkbox"/> Games	<input type="checkbox"/> Photo Search and Images	<input type="checkbox"/> Web-based Email
<input type="checkbox"/> Government and Law	<input type="checkbox"/> Politics	
<input type="checkbox"/> Hacking	<input checked="" type="checkbox"/> Pornography	

▲ CONTENT CATEGORIES (LEGACY)
Categories [SELECT ALL](#)

<input type="checkbox"/> Academic Fraud	<input type="checkbox"/> Hate / Discrimination	<input type="checkbox"/> Proxy / Anonymizer
<input type="checkbox"/> Adult Themes	<input type="checkbox"/> Health and Fitness	<input type="checkbox"/> Radio
<input type="checkbox"/> Adware	<input type="checkbox"/> Instant Messaging	<input type="checkbox"/> Religious
<input type="checkbox"/> Anime / Manga / Webcomic	<input type="checkbox"/> Internet Watch Foundation	<input type="checkbox"/> Research / Reference
<input type="checkbox"/> Automotive	<input type="checkbox"/> IT-ADM	<input type="checkbox"/> Search Engines
<input type="checkbox"/> Blogs	<input type="checkbox"/> IT-AGCOM	<input type="checkbox"/> Sexuality
<input type="checkbox"/> Business Services	<input type="checkbox"/> Jobs / Employment	<input type="checkbox"/> Software / Technology
<input type="checkbox"/> Chat	<input type="checkbox"/> Lingerie / Bikini	<input type="checkbox"/> Sports
<input type="checkbox"/> Classifieds	<input type="checkbox"/> Movies	<input type="checkbox"/> Tasteless
<input type="checkbox"/> Drugs	<input type="checkbox"/> Music	<input type="checkbox"/> Television
<input type="checkbox"/> Ecommerce / Shopping	<input type="checkbox"/> News / Media	<input type="checkbox"/> Terrorism
<input type="checkbox"/> Educational Institutions	<input type="checkbox"/> Non-Profits	<input type="checkbox"/> Video Sharing
<input type="checkbox"/> File Storage	<input type="checkbox"/> Nudity	<input type="checkbox"/> Visual Search Engines
<input type="checkbox"/> Financial Institutions	<input type="checkbox"/> P2P / File sharing	<input type="checkbox"/> Web Spam
<input type="checkbox"/> Forums / Message boards	<input type="checkbox"/> Photo Sharing	<input type="checkbox"/> Webmail
<input type="checkbox"/> German Youth Protection	<input type="checkbox"/> Podcasts	
<input type="checkbox"/> Government	<input type="checkbox"/> Portals	

Migrating Legacy Content Categories

Umbrella has reorganized the content categories and when you go to the All Policies page you will see an option at the top to begin migrating Legacy Categories to Talos Categories. The Migration Tool will walk you through the whole process. To begin click on Migrate Content Categories. This will open the Content Category Migration Tool and explain the Deprecation Phases. Click Next.

Content Category Migration Incomplete. You must migrate all legacy content categories. For more information, see [Umbrella's Help](#). MIGRATE CONTENT CATEGORIES

Content Category Migration Tool

1 Intro ————— 2 Migrate ————— 3 Confirmation

Cisco Umbrella's content categories are changing so that they align with the content categories used by the rest of Cisco's security products. To achieve this alignment, you must migrate your current content categories to Umbrella's new content categories. Use the Content Category Migration Tool to achieve this goal. For more information about the about the Content Category Migration Tool, see [Umbrella's Help](#).

Phases
The migration to new content categories will occur over the course of the following phases:

- 1 **Migration Phase: 3 months**
 - New and legacy content categories can be added and removed from policies.
 - New and legacy content categories available to reports.
- 2 **Deprecation Phase: After Migration Phase for 1 year**
 - Legacy content categories removed from all policies.
 - Legacy content categories available to reports.
- 3 **Removal Phase: At the end of the Deprecation Phase**
 - Legacy Categories removed and unavailable.

At the end of the Migration Phase any remaining Legacy Categories in use within policies will be automatically migrated to New Categories.

CANCEL



NEXT

Content Category Migration Tool

1 Intro ————— 2 Migrate ————— 3 Confirmation

Select Umbrella's legacy content categories for migration to Umbrella's new Talos-based content categories. For more information, [Umbrella's Help](#).

[DOWNLOAD MIGRATION REPORT](#)

<input type="checkbox"/>	Legacy Category	→	New Category	DNS Policy Impact	Identity Impact
<input type="checkbox"/>	P2P / File sharing	→	Peer File Transfer	3 DNS Policies	7 Identities
<input type="checkbox"/>	Radio	→	Streaming Audio	3 DNS Policies	7 Identities
<input type="checkbox"/>	Adult Themes	→	Adult	3 DNS Policies	7 Identities
<input type="checkbox"/>	Tasteless	→	Extreme	3 DNS Policies	7 Identities
<input type="checkbox"/>	Proxy / Anonymizer	→	Filter Avoidance	3 DNS Policies	7 Identities
<input type="checkbox"/>	Nudity	→	Non-sexual Nudity	3 DNS Policies	7 Identities

CANCEL

BACK

NEXT



You can click on the DNS Policies that will be impacted and it gives more info. On the Migrate screen check the box next to the Legacy Category to be migrated and click Next.

Content Category Migration Tool

Intro — Migrate — **3 Confirmation**

Do not close or refresh your browser page during the migration process. After Umbrella completes the migration process, legacy categories are available until the Migration Period ends.

After migration, legacy categories can be manually added to policies until the end of the migration period. Please do not close or refresh your page during the migration process.

Confirm migration

CANCEL **BACK** **MIGRATE**

On the Confirmation screen, Check the box next to Confirm migration and Click Migrate.

Content Category Migration Tool

Intro — Migrate — **3 Confirmation**



Migration Complete

Selected legacy content categories have been successfully migrated to Umbrella's new content categories.



When the Migration is Complete, Click Close. Back under the All Policies screen you will now have a confirmation that the Category Migration has completed.

✓ Category Migration Complete.
All legacy content categories have been successfully migrated or your policies did not previously contain any legacy categories. For more information, see [Umbrella's Help](#).

Below is a list of the Legacy Category and the new Talos Category.


Legacy Category	Talos Category
Academic Fraud	Cheating and Plagiarism
Adult Themes/ Adult	Adult
Anime/Manga/Webcomic	Entertainment
Automotive	Transportation
Blogs	Online Communities

Business Services	Business and Industry
Chat	Chat and Instant Messaging
Classifieds	Auctions
Drugs	Illegal Drugs
Ecommerce/Shopping	Shopping
Educational Institutions	Education
File Storage	Online Storage and Backup
Financial Institutions	Finance
Forums/Message Boards	Online Communities
German Youth Protection	Regional Restricted Sites (Germany)
Government	Government and Law
Hate/Discrimination	Hate speech
Health and Fitness	Health and Medicine
Instant Messaging	Chat and Instant Messaging
IT-ADM/ IT-AGCOM	Regional Restricted Sites (Italy)
Jobs/Employment	Job Search
Lingerie/Bikini	Lingerie and Swimsuits
Movies	Streaming Video
Music	Streaming Audio
News/Media	News
Non-profits	Non-governmental Organizations
Nudity	Non-sexual Nudity
P2P/File Sharing	Peer File Transfer
Photo Sharing	Photo Search and Images
Podcasts	Streaming Audio
Portals	Search Engines and Portals
Proxy/Anonymizer	Filter Avoidance
Radio	Streaming Audio
Religious	Religion
Research/Reference	Reference
Search Engines	Search Engines and Portals
Sexuality	Adult
Software/Technology	Computers and Internet
Sports	Sports and Recreation
Tasteless	Extreme
Television	Streaming Video
Terrorism	Terrorism and Violent Extremism
Video Sharing	Streaming Video
Visual Search Engines	Photo Search and Images
Webmail	Web-based Email

Application Settings

You can also block application categories or specific apps by configuring application settings in your policies.

1. Navigate to **Policies > Policy Components > Application Settings**.
2. Expand an existing policy or click **Add** to create a new policy.
3. Select application categories to be blocked, or expand a category to select specific apps.

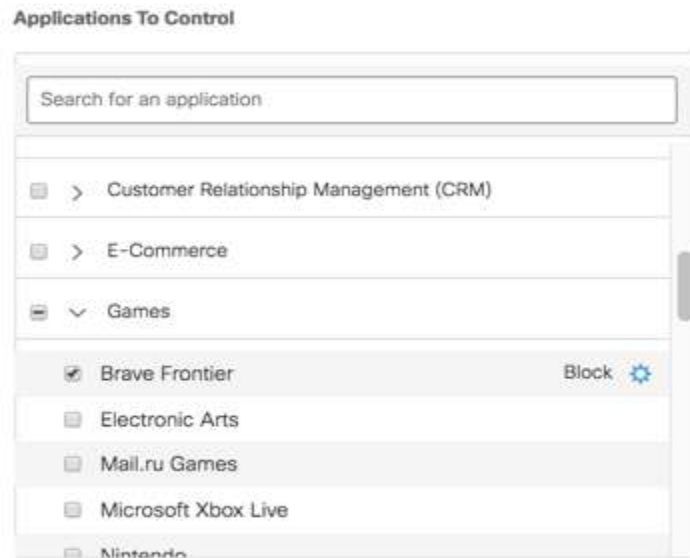

When some, but not all apps in a category are blocked, the checkbox next to the category shows a dash. When all apps in a category are blocked, the checkbox shows a checkmark. When no apps are blocked, the checkbox is empty. When settings are changed and saved in an existing policy, the Application Control Change Summary appears. Click **Proceed** after reviewing the summary.

Application Control Change Summary

Please review the summary and changes before proceeding to the next step.

The following applications will be blocked:



Example App, plus 27 more (Anonymizer)

The following policies will be affected:

Default Policy

[GO BACK](#)

[PROCEED](#)

Block Page Bypass

Block Page Bypass will not be available for any apps blocked at the domain level in Application Settings. The block page will be a static block page without the ability to enter Block Page Bypass codes.

Note: For more application blocking options, use [application settings](#).

5. (Optional) Check **Label application as** and select a label if you want to set a label in addition to blocking the app.
6. Click **Save**.







Security Settings

Now we will adjust the **Default Security** settings for your network. With **Category Settings** and **Destination Lists**, you **create a new one** every time you need to create a **new policy**. With **Security settings**, you have this option as well but it is **more common practice** to see the **Default Security Settings** used in **90% of the Filter Policies**. If you need to **create a new Security Setting**, click the **Small Blue Plus Sign** at the top of the page.

1. Navigate to **Policies > Security Settings**
2. Select the **Default Settings**
3. At the bottom, put a check mark in the box next to any box you want to have blocked on your network. Most common options that are chosen are:
 - a. Malware
 - b. Command and Control Callbacks
 - c. Phishing Attacks
 - d. Potentially Harmful Domains
 - e. DNS Tunneling VPN
 - f. Cryptomining
4. Click **Save**.

Setting Name

Default Settings

-  **Malware**
Websites and other servers that host malicious software, drive-by downloads/exploits, mobile threats and more.
- Newly Seen Domains**
Domains that have become active very recently. These are often used in new attacks.
-  **Command and Control Callbacks**
Prevent compromised devices from communicating with attackers' infrastructure.
-  **Phishing Attacks**
Fraudulent websites that aim to trick users into handing over personal or financial information.
- Dynamic DNS**
Block sites that are hosting dynamic DNS content.
-  **Potentially Harmful Domains**
Domains that exhibit suspicious behavior and may be part of an attack.
-  **DNS Tunneling VPN**
VPN services that allow users to disguise their traffic by tunneling it through the DNS protocol. These can be used to bypass corporate policies regarding access and data transfer.
-  **Cryptomining**
Cryptomining allows organizations to control cryptominer access to mining pools and web miners.

▶ INTEGRATIONS

CANCEL

SAVE

Policies









You can now create your new **District Default Policy**. In your Policy List you will see a **Default Policy**. This policy will always be at the bottom of your list and it contains the **Central Settings** that are managed by the state. You **cannot** edit or remove this policy.

1. Navigate to **Policies > Policy List**
2. Click the **Blue Plus Sign** at the top of the page
3. Since this is a **District Wide Default Policy** we will be selecting **ALL Identities**
 - a. For **Student, Faculty, etc** policies, click on the **AD Groups** identity and search for the **corresponding Active Directory Group**.

What would you like to protect?









Select Identities

Search Identities

<input checked="" type="checkbox"/>		AD Groups	12 >
<input checked="" type="checkbox"/>		AD Users	9 >
<input checked="" type="checkbox"/>		AD Computers	2 >
<input checked="" type="checkbox"/>		Networks	1 >
<input checked="" type="checkbox"/>		Roaming Computers	
<input checked="" type="checkbox"/>		Mobile Devices	
<input checked="" type="checkbox"/>		Sites	4 >
<input checked="" type="checkbox"/>		Network Devices	

All Identities

28 Selected REMOVE ALL

	AD Groups	12
	AD Users	9
	AD Computers	2
	Networks	1
	Roaming Computers	
	Mobile Devices	
	Sites	4
	Network Devices	

CANCEL

NEXT

4. Click **Next**
5. On the “What should this policy do?” page, click **Next**

What should this policy do?

Choose the policy components that you'd like to enable.

- Enforce Security at the DNS Layer**
Ensure domains are blocked when they host malware, command and control, phishing, and more.
- Inspect Files**
Selectively inspect files for malicious content using antivirus signatures and Cloud Advanced Malware Protection.
- Limit Content Access**
Block or allow sites based on their content, such as file sharing, gambling, or blogging.
- Apply Destination Lists**
Lists of destinations that can be explicitly blocked or allowed for any identities using this policy.

ADVANCED SETTINGS

CANCEL

PREVIOUS

NEXT

6. On the **Security Settings** page, click the **drop down** and select **Default Settings** then click **Next**
 - a. The Security Settings can be edited from this page by clicking **Edit** but changes made here will also be made to **every policy** that uses the **Security Settings component**

that has been chose here.








- 1 Security
- 2 Content
- 3 Destinations
- 4 Block Pages
- Summary

Security Settings

Ensure identities using this policy are protected by selecting or creating a security setting. Click Edit Setting to make changes to any existing settings, or select Add New Setting from the dropdown menu.

Default Settings

CATEGORIES TO BLOCK [EDIT](#)

-  **Malware**
Websites and other servers that host malicious software, drive-by downloads/exploits, mobile threats and more.
-  **Newly Seen Domains**
Domains that have become active very recently. These are often used in new attacks.
-  **Command and Control Callbacks**
Prevent compromised devices from communicating with attacker's infrastructure.
-  **Phishing Attacks**
Fraudulent websites that aim to trick users into handing over personal or financial information.
-  **Dynamic DNS**
Block sites that are hosting dynamic DNS content.
-  **Potentially Harmful Domains**
Domains that exhibit suspicious behavior and may be part of an attack.
-  **DNS Tunneling VPN**
VPN services that allow users to disguise their traffic by tunneling it through the DNS protocol. These can be used to bypass corporate policies regarding access and data transfer.

CANCEL

PREVIOUS

NEXT

7. On the **Content Page** select **Custom**, then from the drop down on the top right, select **Default Settings** and click **Next**

Limit Content Access
Access to these sites will be restricted based on the type of content served by the pages of the site.

High
Blocks adult-related sites, illegal activity, social networking sites, video sharing sites, and general time-wasters.

Moderate
Blocks all adult-related websites and illegal activity.

Low
Blocks pornography.

Custom
Create a custom grouping of category types.

Categories to Block - High
These are the categories we will block. Note: if you want to make changes create a custom setting.

- Adult Theme
- Alcohol
- Classifieds
- Drugs
- Forums / Message boards
- Games
- Instant Messaging
- Nudity
- Photo Sharing
- Proxy / Anonymizer
- Social Networking
- Video Sharing
- Weapons
- Adware
- Chat
- Dating
- File Storage
- Gambling
- Hate / Discrimination
- Lingerie / Bikini
- P2P / File sharing
- Pornography
- Sexuality
- Tasteless
- Visual Search Engines
- Webmail

Limit Content Access
Access to these sites will be restricted based on the type of content served by the pages of the site.

High
Blocks adult-related sites, illegal activity, social networking sites, video sharing sites, and general time-wasters.

Moderate
Blocks all adult-related websites and illegal activity.

Low
Blocks pornography.

Custom
Create a custom grouping of category types.

Custom Setting

Default Setting

Centralized Default Settings

Default Settings

Faculty

Grant's Categories

Shelby's Default Categories

Shopping

CREATE NEW SETTING

<input type="checkbox"/> Financial Institutions	<input type="checkbox"/> Forums / Message boards
<input checked="" type="checkbox"/> Gambling	<input checked="" type="checkbox"/> Games
<input checked="" type="checkbox"/> German Youth Protection	<input type="checkbox"/> Government
<input checked="" type="checkbox"/> Hate / Discrimination	<input type="checkbox"/> Health and Fitness
<input type="checkbox"/> Humor	<input checked="" type="checkbox"/> Instant Messaging

8. On the **Applications Page** choose to use the **Default Settings** or if you have created a custom Applications Settings for this specific policy select it from the drop down list and click **Next**
 - a The Applications Settings can be created or edited from this page but changes made here will also be made to **every policy** that uses the **Application Settings component** that has been chosen here.

Control Applications

Select applications or application categories you'd like to block or allow for the users in your organization

Application Settings

Default Settings

Default Settings

CREATE NEW SETTING

Search for an application


- Ad Publishing
- Anonymizer Block
- Application Development and Testing
- Business Intelligence
- CRM
- Cloud Storage
- Collaboration
- Compute

CANCEL PREVIOUS NEXT


9. On the **Destinations Page**, your **Global Block** and **Global Allow** Destination Lists will already be populated here. Put a checkmark in the box next to your Default Allow and Default Block list on the left hand side. You will see them populate in the area on the right hand side along with the Global Allow and Global Block lists.

a. Your Global Destination Lists will be in every policy and cannot be removed so be careful with your Destination Lists.

9. Click **Next**

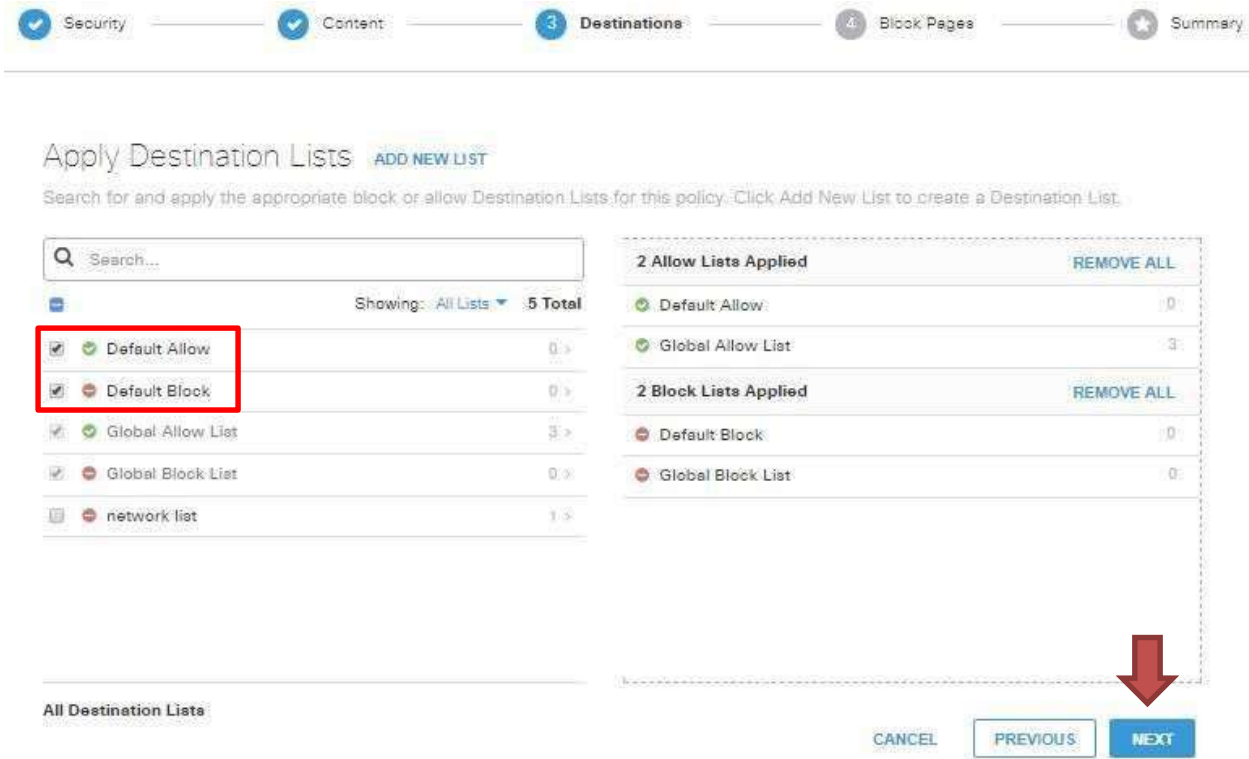

10. Choose whether you want to use the Umbrella Default Appearance or Custom Appearance then click **Next**.

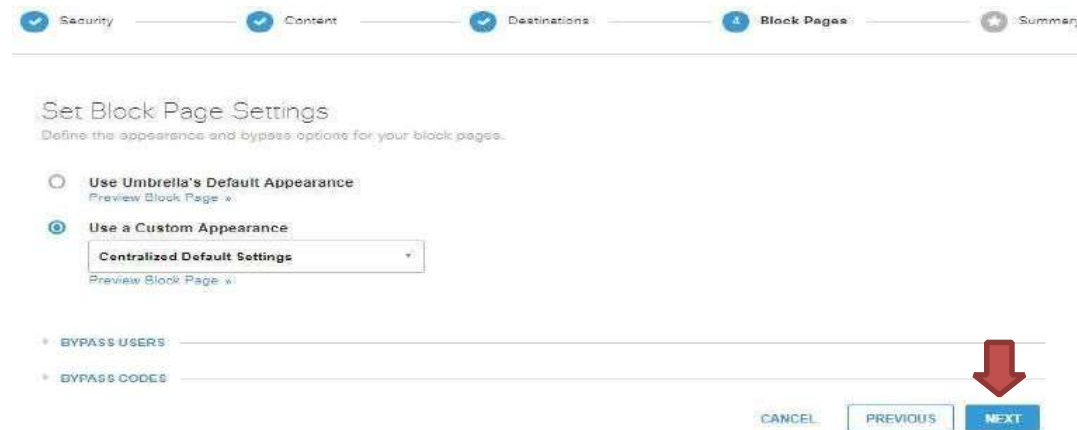

11. Name your policy **District Default Policy** and verify that all of your settings are correct. Once you are done, click **Save**.

Policy Summary

Policy Name

District Default Policy



28 Identities Affected

0 Network Devices, 4 Sites, 0 Mobile Devices, 0 Roaming Computers, 1 Network, 2 AD Computers, 9 AD Users, 12 AD Groups

[Edit](#)



Security Setting Applied: Default Settings

- Command and Control Callbacks, Malware, Phishing Attacks, plus 1 more will be blocked
- No integration is enabled.

[Edit](#) [Disable](#)



Content Setting Applied: Default Settings

- Adware, Alcohol, Auctions, plus 34 more will be blocked.

[Edit](#) [Disable](#)



4 Destination Lists Enforced

- 2 Block Lists
- 2 Allow Lists

[Edit](#)



File Inspection Enabled

Allows intelligent proxy to block malicious files.

[Disable](#)



Custom Block Page Applied

Centralized Default Settings

[Edit](#)

ADVANCED SETTINGS

[CANCEL](#)

[PREVIOUS](#)

[SAVE](#)

The policy that was just created will be the Default Policy for the District. If a user does not authenticate against Active Directory, that user will be filtered according to this policy. That is why it is recommended to make this policy so strict and also why every Identity is selected at the beginning of creating this policy.

Follow these steps again to create a Student, Faculty, and Administration policy but do **NOT** select every Identity. Instead navigate into **AD Groups** and search for the corresponding **Active Directory Group**. You will need to create new individual components for each new policy.

OpenDNS Policies are a top down process. This means that when a user tries to authenticate to a policy, it will start at the top of the list and work its way down. That is why your most **LEAST** restrictive policies, **I.E. IT or Administration**, should be at the **top** and your **MOST** restrictive policies, **I.E. Students and the District Default Policy**, should be at the **bottom**.

Policy Advanced Settings

After the policy has been created, clicking on the policy again will display page that is very similar to the summary page seen during the last step of the policy creation. The policy can be edited here as required. At the bottom is a drop down called **Advanced Settings**.



Policy Name

District Default Policy



0 Identities Affected

[Enable](#)

Security Setting Applied: Default Settings

- Command and Control Callbacks, Malware, Phishing Attacks, plus 1 more will be blocked
- No integration is enabled.

[Edit](#) [Disable](#)

Content Setting Applied: Default Settings

- Adware, Alcohol, Auctions, plus 34 more will be blocked.

[Edit](#) [Disable](#)

2 Destination Lists Enforced

- 1 Block List
- 1 Allow List

[Edit](#)

File Inspection Not Enabled

Allows intelligent proxy to block malicious files.

[Enable](#)

Custom Block Page Applied

Centralized Default Settings

[Edit](#)

ADVANCED SETTINGS

[DELETE POLICY](#)[CANCEL](#)[SAVE](#)

Clicking the **Advanced Settings** drop down will display a few advanced features.

1. The first option is to Enforce SafeSearch. SafeSearch is an automated filter of pornography and other offensive content that's built into search engines. If anyone enters an inappropriate or suggestive phrase, no results will be returned that could be considered unsafe or problematic. This method of enforcing SafeSearch is supported for Google, YouTube, and Bing.

SAFESEARCH



Enforce SafeSearch

Enforce SafeSearch for queries sent to supported search engines [Learn More](#)

2. The second option listed is **Allow-Only Mode**. This option disables any block settings in the policy because it will block every single web connection by default. With this option enabled, users who authenticate to this policy will **ONLY** be able to access the websites that are listed in the **Allow Destination Lists**. This is useful for students who have broken the rules to many times. An Active Directory group can be created called No Internet. A Policy would then be created using only that AD Group as an identity. This policy will then be moved to the very top of the list. If a student needs internet access for specific sites for class work but are no longer allowed to access anything else, then they can be moved to the No Internet Group in Active Directory which will cause them to authenticate to this policy and only be allowed access to the websites listed in the Allow Destination Lists.


ALLOW-ONLY MODE



Allow-Only Mode

In this mode, access to sites needs to be specifically granted; otherwise connections will be blocked by default.

- The final option is **Logging**. This is set to **Log All Requests** by default and should remain that way on every policy. Without this option enabled, Activity Search will no display any results resulting in no longer having the ability to pull reports.

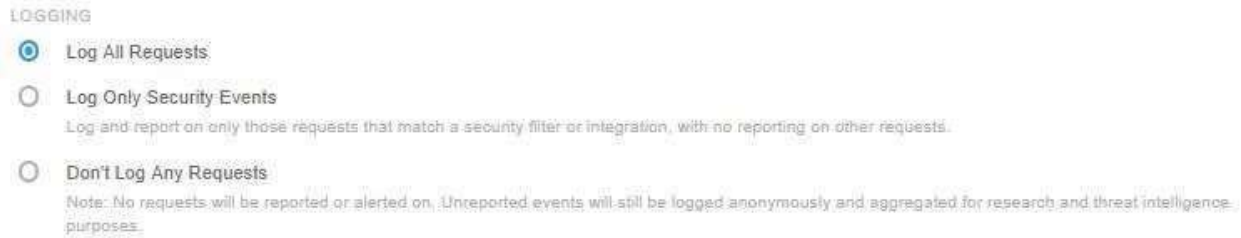

Deploying Umbrella Certificate

Advanced Umbrella features, such as IP Layer Enforcement and the ability to block your own custom URLs require that the Cisco Root CA be installed locally.

In addition, by installing the certificate, you avoid a common problem with block pages that your users may encounter. When HTTPS enabled domains are blocked by your policy, Cisco Umbrella presents a block page to you which is also served over HTTPS. This block page is encrypted with a certificate signed by the Cisco Root CA. In order to avoid certificate errors when accessing the block page, you must install the Cisco Root CA in your browser, or if you have a network of computers, in your users' browsers.


Why Deploy Certificate?

Umbrella's Block Page and Block Page Bypass feature present an SSL certificate to browsers that make connections to HTTPS sites. The certificate will match the requested site but will be signed by the Cisco Root Certificate Authority (CA). If the Cisco Root CA is not trusted by your browser, an error may be displayed. Typical errors include "The security certificate presented by this website was not issued by a trusted certificate authority" (Internet Explorer), "The site's security certificate is not trusted!" (Google Chrome) or "This Connection is Untrusted" (Mozilla Firefox). Although the error is expected, the messages displayed can be confusing and annoying and you may wish to stop them from appearing.

To avoid these errors entirely, install the Cisco Root CA in your browser, or the browsers of your users (if you're a network admin). This can be done on a per-browser, per-machine basis for personal use or small deployments. For larger deployments, an automatic installation through Group Policy (GPO) can be done. Note that the automatic installation through GPO will only work for users with Internet Explorer, Edge, or Chrome on Windows systems. As such, if your network includes some users who use Firefox or Safari browsers, and for users on non-Windows operating systems, the manual installation procedures must be followed.


Download Certificate

In the Umbrella console under Deployment there is a link to download the root certificate which is necessary for proper processing of the Umbrella block page for destinations which are https:// encrypted sites. This certificate is also necessary for the option of decrypting DNS requests related to https encrypted sites.

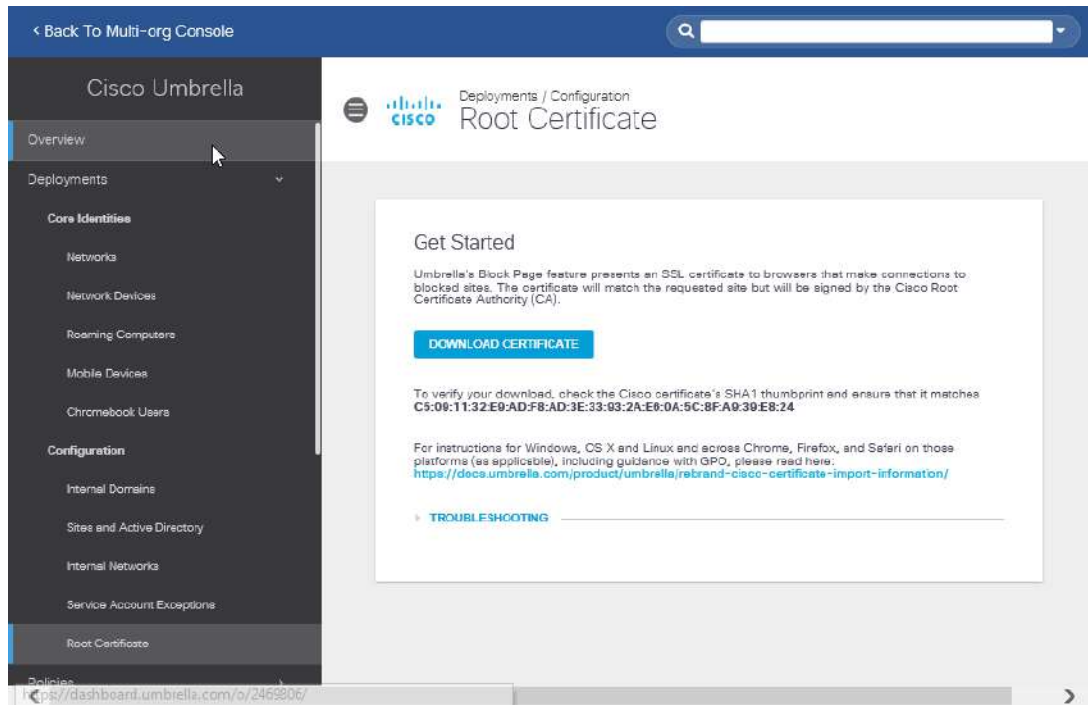

This certificate can be pushed to all windows workstations with group policy, and to Chromebooks with Google admin. You can use the Apple MDM to push it to iOS devices.


Download the certificate to a network location that is accessible to the device from which you will be implementing the distribution.

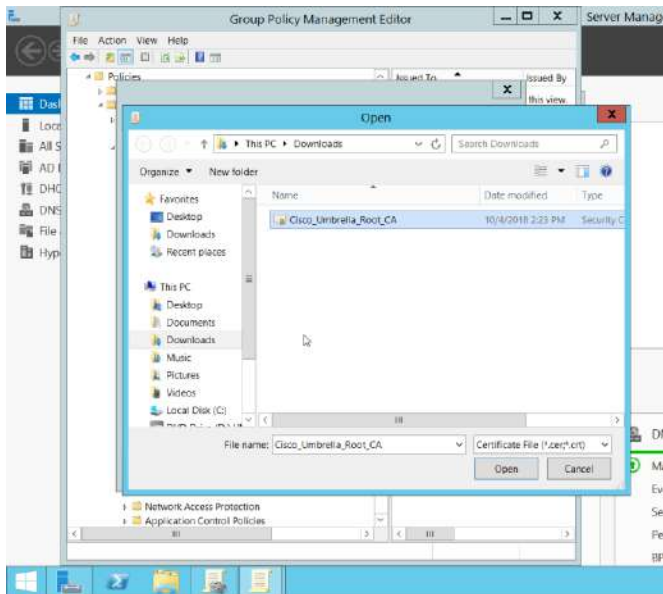


Deploy Certificate with GPO

To deploy the certificate to Windows devices using group policy, follow the instructions below:


1. On a domain controller in the forest of the account partner organization, start the **Group Policy Management** snap-in.

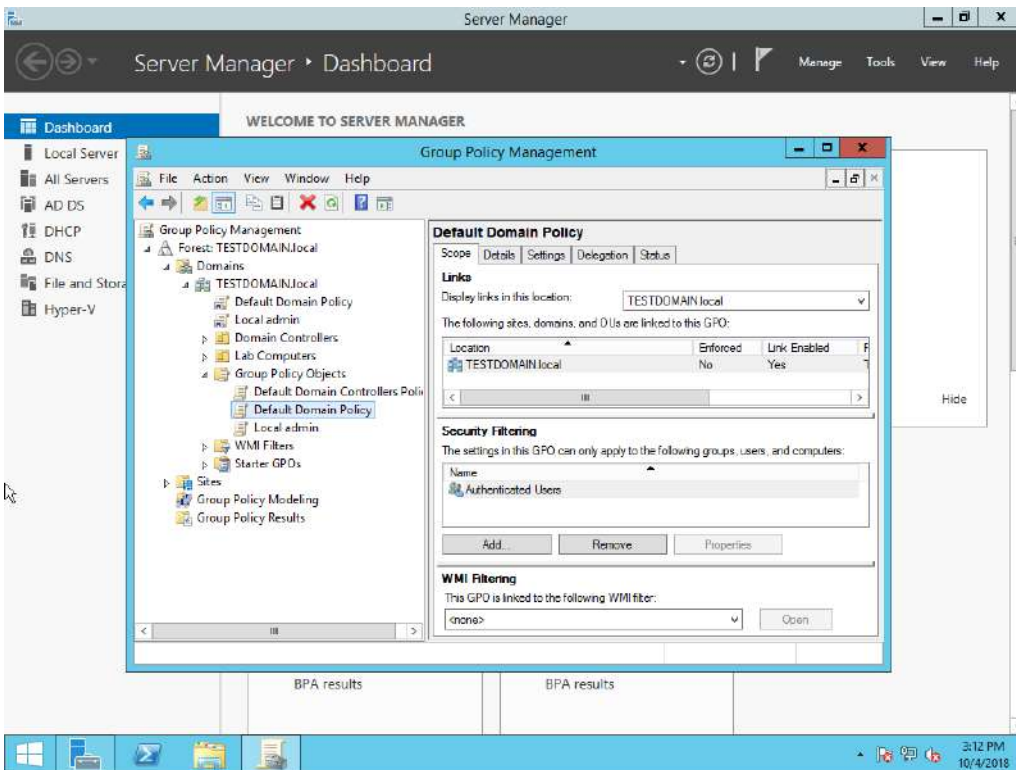


2. Find the Default Domain Polity Group Policy Object (GPO). Right-click the GPO, and then click **Edit**.

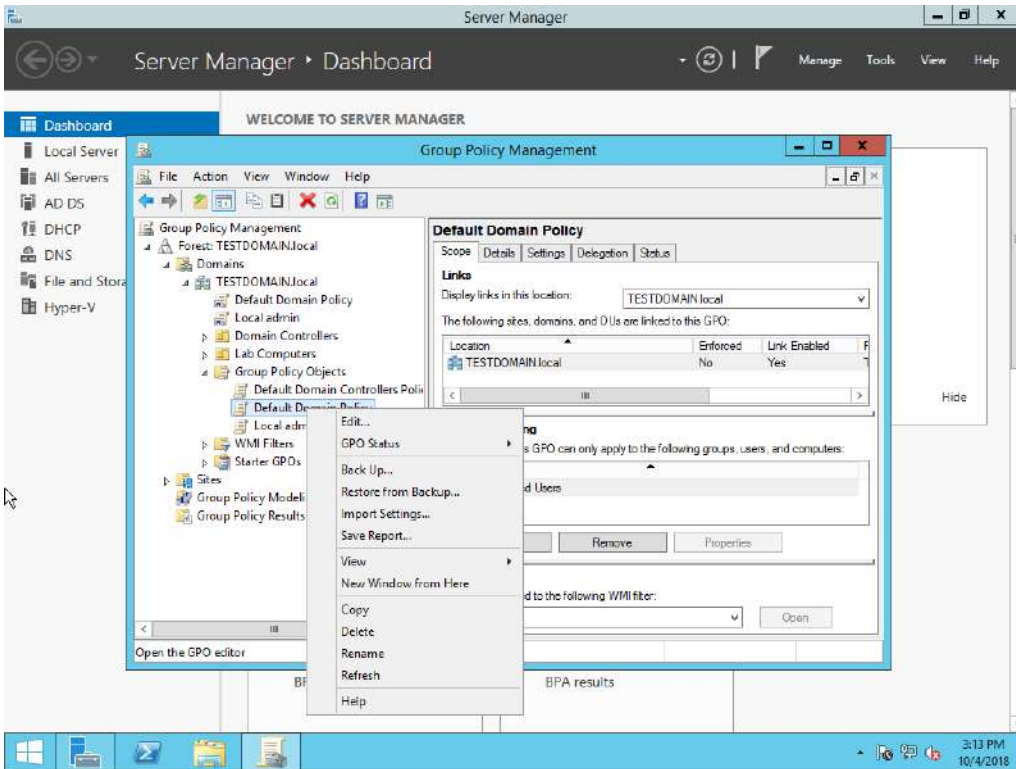


3. In the console tree, open **Computer Configuration\Policies\Windows Settings\Security Settings\Public Key Policies**, right-click **Trusted Root Certification Authorities**, and then click **Import**.

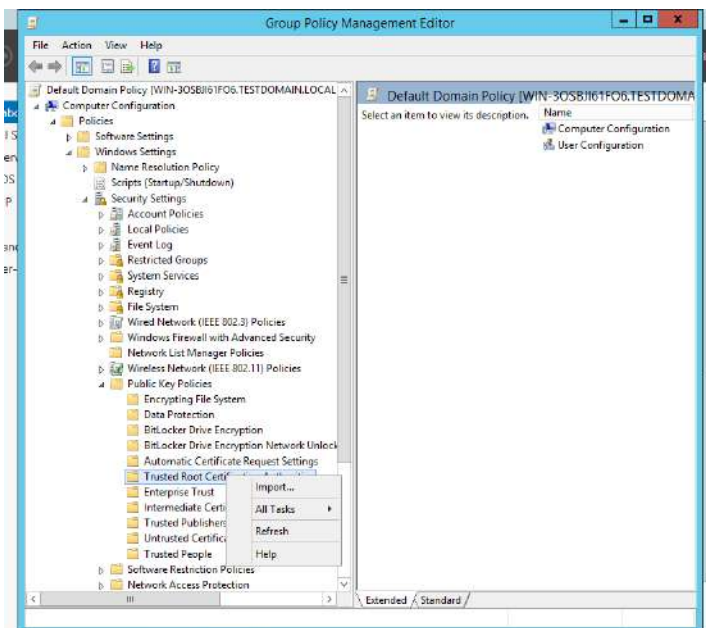


4. On the **Welcome to the Certificate Import Wizard** page, click **Next**.
5. On the **File to Import** page, type the path or browse to the appropriate certificate files and click **Next**.

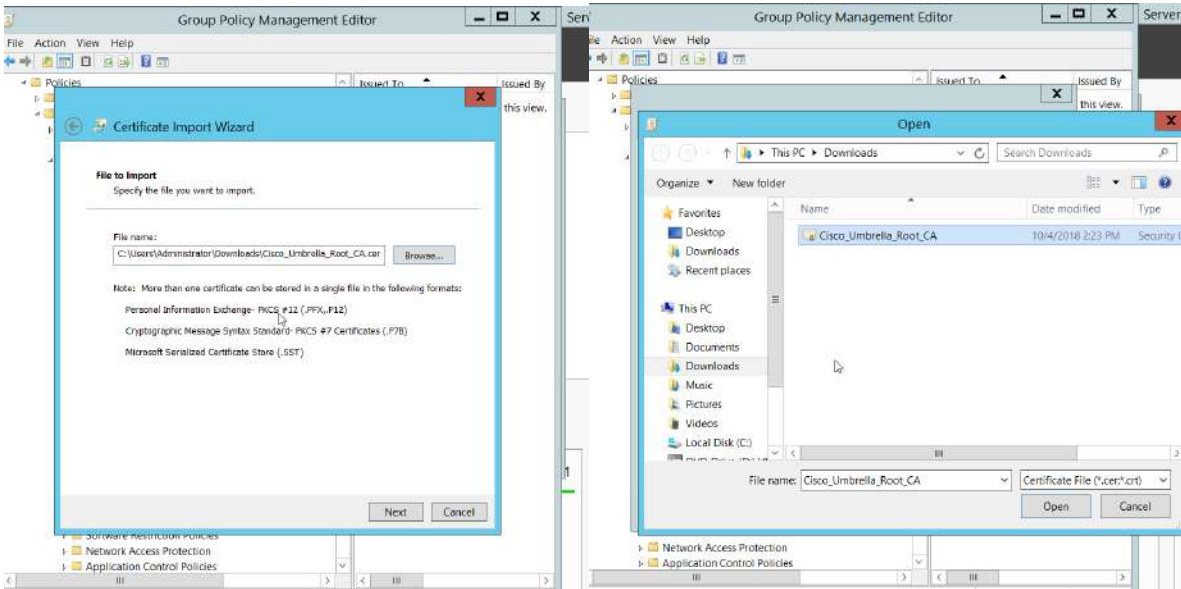

6. On the **Certificate Store** page, click **Place all certificates in the following store**, and then click **Next**.

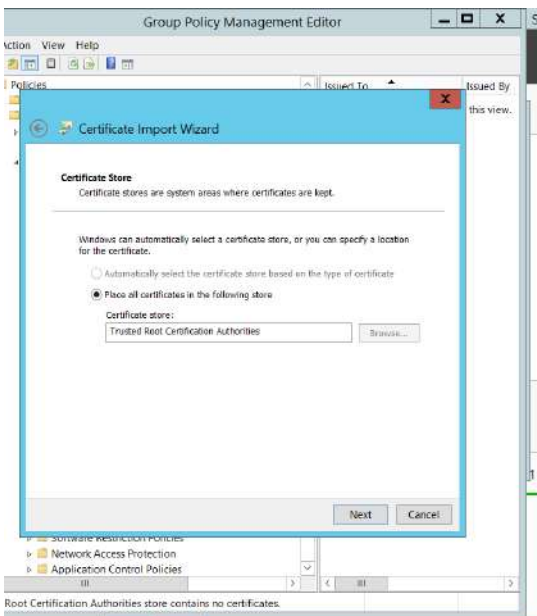

7. On the **Completing the Certificate Import Wizard** page, verify that the information you provided is accurate, and then click **Finish**.

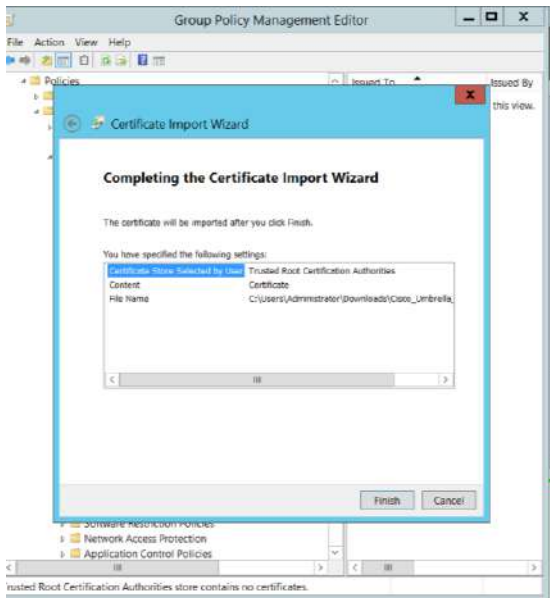


Deploy Certificate to Chrome Devices with Google Admin

To distribute the certificate using Google Admin, do the following:

1. [Sign in](#) to the [Google Admin console](#).
2. Click **Device management**.
3. On the left, click **Network**.
4. Click **Certificates**.
5. (Optional) On the left, choose the organizational unit where you want to add the certificate.
Note: The top-level organization is selected by default to give all users (including those in suborganizations) access to any added certificates.
6. Click **Add Certificate**.
7. Choose the certificate file to upload and click **Open**.
Note: DER-encoded certificates are not supported. Chrome devices only accept PEM format.
8. (Optional) If the certificate will be used as a root CA for an SSL-inspecting web filter or to allow the browser to validate the full digital certificate chain of servers, check the **Use this certificate as an HTTPS certificate authority** box.
9. Click **Save** and then **Done** to confirm.
Verify the CA on managed Chrome devices
 1. Go to **chrome://settings/certificates**.
 2. Click **Authorities**.
 3. Scroll down to see the newly-added CAs.

CAs set up in your Admin console are highlighted as follows:

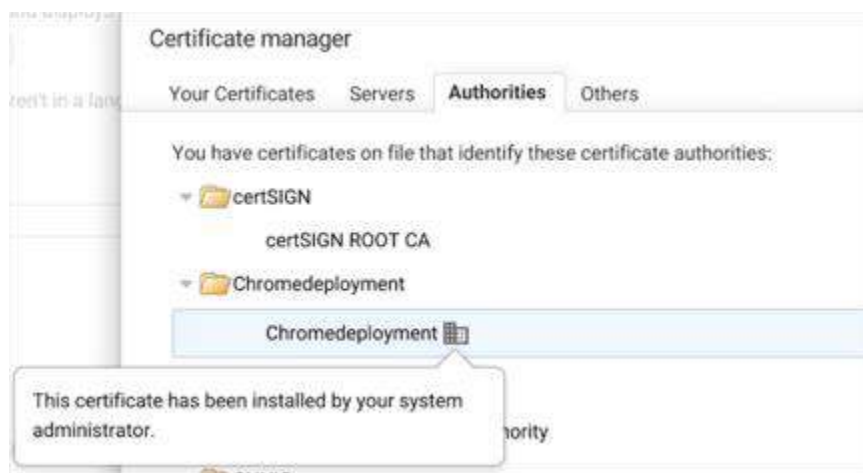

With respect to your iOS devices, contact your management provider or install each device with the certificate individually.

ByPass User

Setting up your Block Page Bypass

An important step when configuring policies is to ensure that you're giving the right information to your users if they are blocked under Security or Content categories. As the Umbrella administrator, you may wish to exempt users from being blocked during certain times and you can set up the rights to do that as well.

Some helpful terms to know:

- **Block Page**—The page that's displayed in the browser when a user of your Umbrella service tries to go to a website that's been blocked under the category defined by the policy for the Identity that user falls under.
- **Block Page Bypass**—The method by which certain users who have been given special authority can bypass a normal block page. There are two ways you can bypass a block page: having a user account (a bypass user) or having a special code (a bypass code).
- **Block Page Bypass User**—A special user account that gives the rights to certain individuals or a group of individuals to go to blocked sites while still being part of the enforcement given to the larger policy group to which they belong.
- **Block Page Bypass Code**—A code that can be given to individuals or groups of individuals to allow them to go to some or all blocked websites until such time as the code expires.

Not all categories can be bypassed. If a user is blocked for a Security or Malware category, the site is considered malicious and should not be accessed under any circumstances. If you think a domain shouldn't be blocked, please email us at security-block@opendns.com.

If you'd like to know more about a block or have us review it in more detail, open a case by emailing umbrella-support@cisco.com with information about the domain and our support and security teams will review.


The following policy settings can be bypassed:

- Content category blocks
- Destination list blocks—these are destination lists you've created
- The phishing security block

Setting up a Block Page Bypass User

A "Block Page Bypass" user is special username and password that can be given to one or more users in order to provide them with rights to bypass pages that are typically blocked through policy settings. This user can be thought of as being a special set of rights that are given to individuals as required. The Block Page Bypass user has no ability to log into the dashboard or do any administrative functions other than bypass blocked sites.

1. Navigate to **Admin > Bypass Users**. Alternately, the block page bypass user can be created by editing the Block Page Appearance in the summary of a policy. The edit for this setting is in the lower right corner of the policy summary.

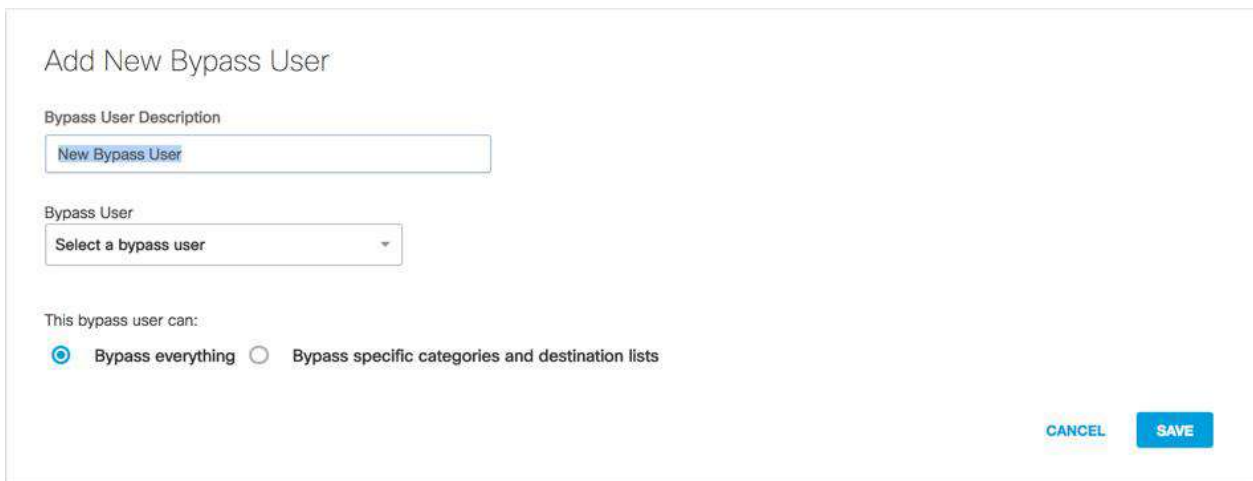

2. From the **Bypass User** drop-down list, choose a *<user>*.
When a block page shows up, the user then enters their credentials and bypasses it.
3. Select how the user can bypass a block page.
4. Click **Save**.

The "Block Page Bypass" user gives the rights to certain individual people, or a group of people to go to blocked sites while still being part of the enforcement given to the larger policy group they belong to.

Create New Bypass User

This user will be able to bypass blocked destinations.

Bypass User Description

Matt's Bypass user

Bypass User

Matt Prytuluk

This bypass user can:

- Bypass everything Bypass specific categories and destination lists

Bypass Categories

Allow the user to bypass specific categories.

Bypass Destination Lists

Allow the user to bypass specific lists of blocked destinations.

Search Categories

Academic Fraud

Adult Themes

Adware

Alcohol

Anime/Manga/Webcomic

To setup a brand new bypass user, that is, an account with rights to authenticate against the block page and continue browsing, first, create the user with the Block Page Bypass role.

1. Navigate to **Admin > Accounts** and click the + (**Add**) icon.
2. Choose Block Page Bypass from the drop-down list.

3. Click **Create** and in the pop-up modal click **Yes** to configure Block Page Bypass settings for the user. The Add New Bypass User page opens (Policies > Bypass Users).

4. If you click **No Thanks**, you can change the settings for the user you've created under **Admin > Bypass Users** or add the settings as part of the policy summary as described earlier.

5. Add a new bypass user and click **Save**.

Add New Bypass User

Bypass User Description

New Bypass User

Bypass User

Select a bypass user

This bypass user can:

Bypass everything Bypass specific categories and destination lists

CANCEL SAVE

Creating a Block Page Bypass Code

A Block Page Bypass Code is a code that can be given to users through email, instant messenger or the phone to allow an instant bypass of a particular blocked page.

1. Navigate to **Admin > Bypass Codes** and click the + (**Add**) icon.
You can also access this page from the Summary page of a policy. Click **Edit** for the Block page applied.

Policies / Block Page Settings

Clear DNS Dashboard

Bypass Codes +

Q Search... SEARCH

Add New Bypass Code

Bypass Code Name

New Bypass Code

This bypass code can:

Bypass everything Bypass specific categories and destination lists

This bypass code will expire on:

2022-06-25 11:59 PM

CANCEL SAVE

2. Set the code to either allow access to all sites or a subset of the content category or destination lists you've defined.
3. The code can be set to expire at a day in the future and at an hour of that date.
4. Click **Save**.

Removing a Bypass Code

1. Navigate to **Policies > Block Page Settings > Bypass Codes**.

2. Expand the code you want to delete and click **Delete**.

Legal team bypass code	Code	Can Bypass
	0A6N1	Everything

Bypass Code Name



Legal team bypass code

Code: **0A6N1**

This bypass code can:

Bypass everything Bypass specific categories and destination lists

This bypass code will expire on:

2018-02-03  11:59 PM 

DELETE

Applying Bypass Codes/Users to a policy

Before you will be able to use your new bypass user or bypass code, you must first link it to a policy!

1. Navigate to **Policies > All Policies**
2. Click on the policy you want to apply the bypass user or code to.
3. Click Edit under the Block Page that is Applied.
4. Expand either Bypass Code or Bypass User and select the user or code you want to apply.
5. Click Set & Return, then SAVE!

Interacting with a Block Page As a User

As an administrator, you can preview the block page; however, not all elements of the page will be accurately reflected in Preview Mode. This is a problem that's being worked on and will change in the future.

As a standard (non-bypass) user, if you were to go to a website blocked under your Umbrella policy, you would see a standard block page like this. This example has a custom block page message that includes a link to an acceptable use policy from this organization, as well as a custom logo for this organization.

Note:

Keep in mind that the block page bypass will not work with domains blocked due to malicious activity (such as malware or phishing). You can only access the bypass block page if the domain was blocked due to content category settings or domain block lists. The "Admin" link will not appear if the domain was blocked as malicious activity.

At the bottom of the block page, there are two hyperlinks that may appear:

- **Contact your network administrator**—Allows a user to email the administrator if the user thinks the block is in error.
- **Administrative Bypass**—This allows a user with a bypass user or a code to access the part of the page that asks for that information. Below is the same block page for a policy that has both a user and a code configured for it.



After clicking on the Administrative Bypass link you will be able to authenticate with either your Bypass User or Bypass Code



After you enter your email/password or bypass code and click bypass you will see the following box



You can now click on Continue browsing at <URL> and continue to the site. A popup box will come up and needs to stay open until you are finished with the bypass. When finished click Log Out to end your bypass session.



Chromebook Client

The Cisco Umbrella Chromebook client provides DNS layer protection for Chromebook users whether they are connected to your networks or remotely, no matter which Chromebook device they use.


You can use the Chromebook client to accomplish three main goals:

- Protection from phishing: Protect against phishing threats automatically with Umbrella’s global network data and predictive intelligence to discover internet infrastructure used to host phishing sites—before employees or students ever receive the phishing email.
- Content category filtering: Gain visibility and control of content on and off network. Organizations can help ensure compliance with the Children’s Internet Protection Act (CIPA) utilizing over 80 content categories, as well as their own allow and block lists of domains.
- Per-user visibility and policy: Enforce policy-based protection whether users are on or off the network. If user becomes infected, pinpoint activity to a specific user to expedite remediation.

How the Umbrella Chromebook client works

Chromebook users are protected by the Cisco Umbrella Chromebook client in the following sequence:

- A user enters a URL in the Chromebook browser.
- The Chromebook client extension copies the domain name from the URL and sends it to the Chromebook client app.
- The app creates an EDNS query, then sends the DNS request, including the EDNS information, to the Umbrella resolver.
- Depending on the applicable policies applied in the Umbrella dashboard, the resolver responds by either blocking the IP address of disallowed domains or resolving the IP address in the case of acceptable domains.

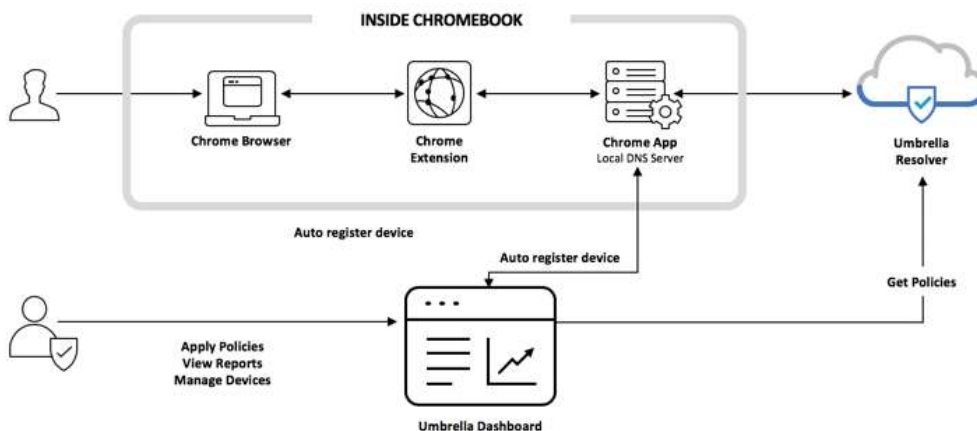

The Umbrella Chromebook client is deployed using a Chrome extension and application available on the Chrome Web Store.

Installation Guide

There are three parts to this installation:

- [Downloading the configuration file from the Umbrella Dashboard](#)
- [Installing the Cisco Umbrella Chromebook client **extension** on your Chromebooks](#)
- [Installing the Cisco Umbrella Chromebook client **application** on your Chromebooks](#)

In addition, you can find instructions for removing Cisco Umbrella Chromebook software in the last section of this guide.

Prerequisites

In order to install the Cisco Umbrella Chromebook client, you must:

- be a G Suite admin account in order to log into `admin.google.com`.
- have a valid Umbrella dashboard login.
- Chromebooks must have Chrome OS v55 or later.
- Chromebooks are not in Kiosk mode
- Port 53 UDP accessible to 208.67.220.220 and 208.67.222.222
- <https://registration.polaris.qq.opendns.com> is accessible
- **Unsupported** :
 - Chrome browser on OS X, Windows, and Linux
 - Devices running variations or third-party distributions of Chrome OS, such as Neverware CloudReady.


Networking Requirements

The Cisco Umbrella Chromebook client uses the following ports:

Port and Protocol	Source / Destination	Notes
53 (TCP + UDP)	208.67.222.222/32, 208.67.220.220/32	Used for EDNS Queries
443 (TCP)	registration.polaris.qq.opendns.com	HTTPS - Used for registration
443 (TCP)	Virtual Appliances	Used for the Trusted Network Detection feature .

Recommendations

Disallow the *incognito window* for Chromebook users in the G Suite Admin Console.

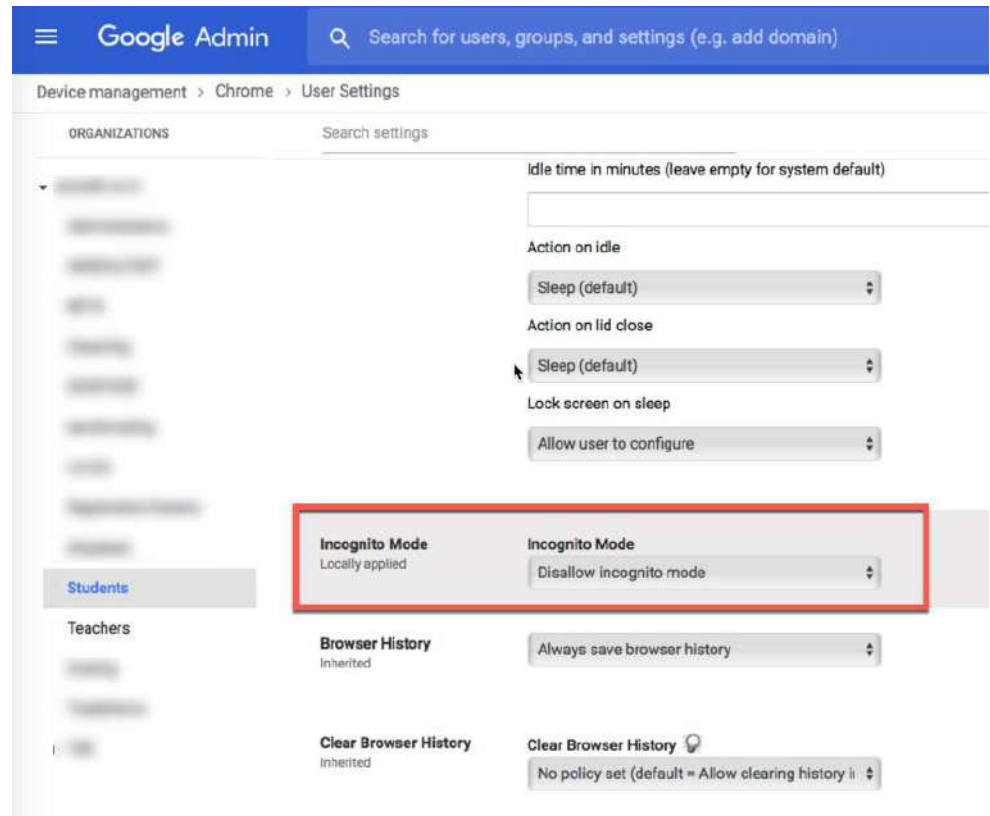

Implementing Trusted Network Detection

If you are implementing [Trusted Network Detection](#), Cisco Umbrella recommends that you check your DHCP server to make sure that it is providing Chromebook devices with the same VA IP address as other devices on your network.

Part 1: Obtain the configuration file from Umbrella

The configuration file contains the information required for the Cisco Umbrella Chromebook client to work with Umbrella.

1. Log into dashboard.umbrella.com
2. Open *Deployments*, then select *Chromebook Users*.
3. Select *Configure*, then download the configuration file:

Configure Umbrella Chromebook Clients

Protecting Chromebook Computers

Enable Umbrella security for your Chromebooks by installing the Chromebook client Extension and App. You configure the Umbrella App by using the Google Admin Console to upload this data file

1. Download your organization's configuration file from the link below:

[CHROMEBOOKCONFIG.JSON](#)

(Size ~0.1 kB)

2. Install the Chromebook client software (Extension and App) by following the [Chrome Setup Guide](#)

3. Sign in with super admin email id of your Google Admin Console to sync GSuite identities into Umbrella.

[SUPER ADMIN SIGN IN](#)

JSON File Example (Without VA):

Note: cannot contain line breaks or spaces

```
{"googleDirectoryService":{"Value":True},"organizationInfo":{"Value":{"organizationId":7896540,"regToken":"kBCTNrrRerVQep49ErsR1AbLURODxKXn "}},"publicSession":{"Value":false},"valIPs":{"Value":[]}}
```

VA customers only

To use the Cisco Umbrella Chromebook client in a network with Cisco Umbrella Virtual Appliances, you must add the IP addresses of your VAs to the configuration file before uploading it. Each VA IP addresses must be enclosed in double quotes, comma-separated. This example illustrates a network with two VAs:

```
"valIPs":{"Value":["192.168.100.10","192.168.100.11"]}
```

JSON File Example (With VA):

Note : Cannot contain line breaks or spaces

```
{"googleDirectoryService":{"Value":True},"organizationInfo":{"Value":{"organizationId":7896540,"regToken":"kBCTNrrRerVQep49ErsR1AbLURODxKXn"}}, "publicSession":{"Value":false},"valIPs":{"Value":["192.168.100.10","192.168.100.11"]}}
```


Or

```
{
  "organizationInfo":{
    "Value":{
      "organizationId":1234567,
      "regToken":"GtTYPQfgSzQtGzYUrINmbjgTu5XriDtn"
    }
  },
  "valPs":{
    "Value":[
      "192.168.100.10",
      "192.168.100.11"
    ]
  },
  "googleDirectoryService": {
    "Value": true
  }
}
```

Make sure you save the file in a known location. You will upload this file during the installation of the Cisco Umbrella Chromebook client **application**.

Part 2: Install the Cisco Umbrella Chromebook client extension


1. Log into <https://admin.google.com>.

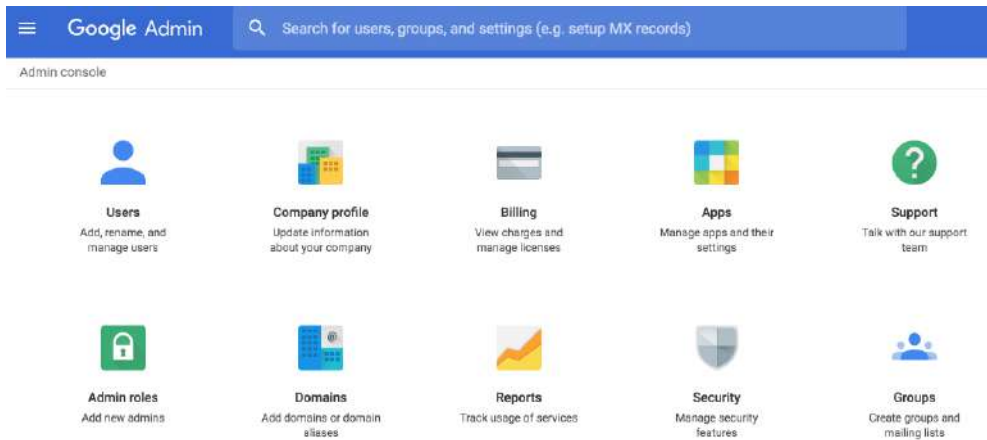


2. Select **Devices**.




3. In the Device Management window, select **Chrome Management**.



4. In the Chrome Management window, select **Apps & extensions**.

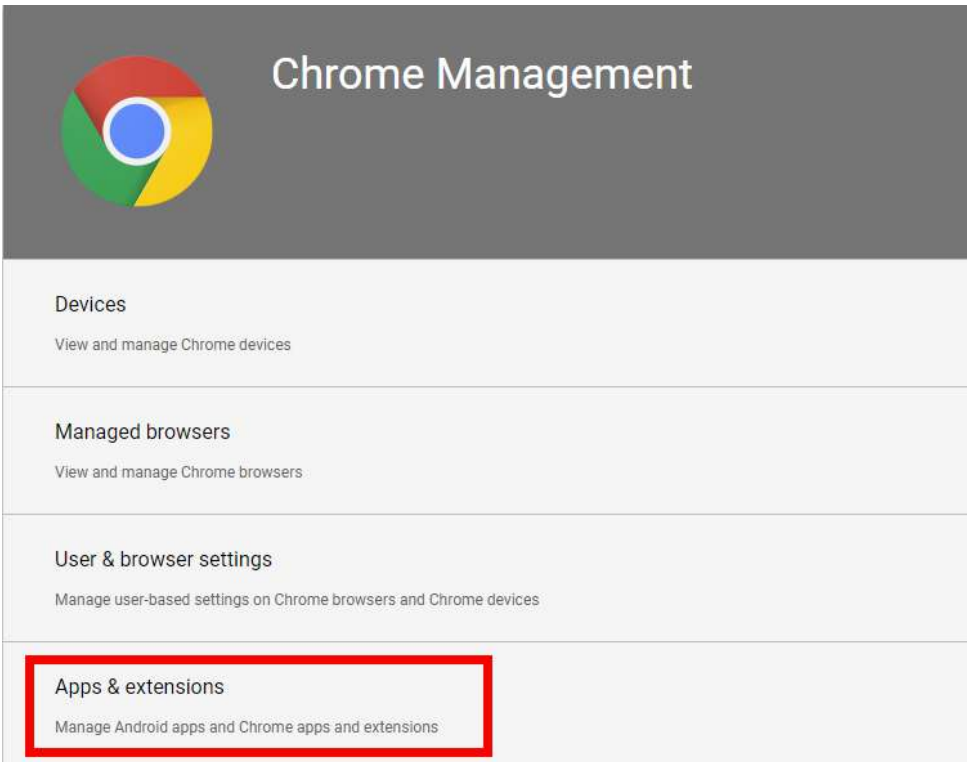

5. On the left side, select the OU of the **Users** you want to deploy the extension to, or the top level domain if you want to push it to everyone.

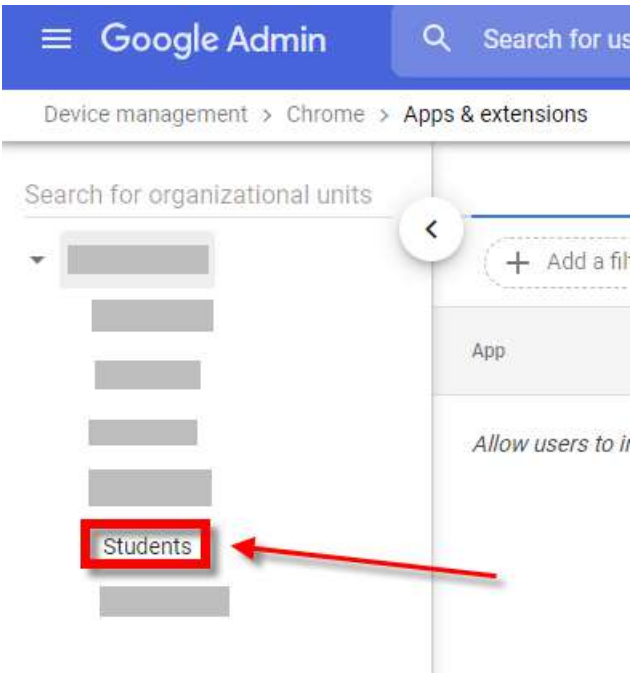

6. At the bottom right, click the **Yellow +** then click the icon that resembles a calculator.



7. Search for the ID of the Cisco Umbrella Chromebook client extension **jcdhmojfecjfmdbpchihibeilohgnbdci** then click **save**. (Searching by name will not work.)

Add Chrome app or extension by ID

Chrome apps and extensions can also be added by specifying the ID. If it is outside the Chrome Web Store, you must also specify the URL where the extension is hosted.

Extension ID

jcdhmojfecjfmdbpchihibeilohgnbdci

From the Chrome Web Store ▾

CANCEL

SAVE

8. Click on the drop down that currently says **Allow Install**




9. Select **Force Install**.

This ensures that Chromebook users in the selected Organization Unit cannot remove or disable the extension.



10. Select **Save**.

You have finished installing the Cisco Umbrella Chromebook client **extension**. Next proceed with the next section to install the Cisco Umbrella Chromebook client **application**.

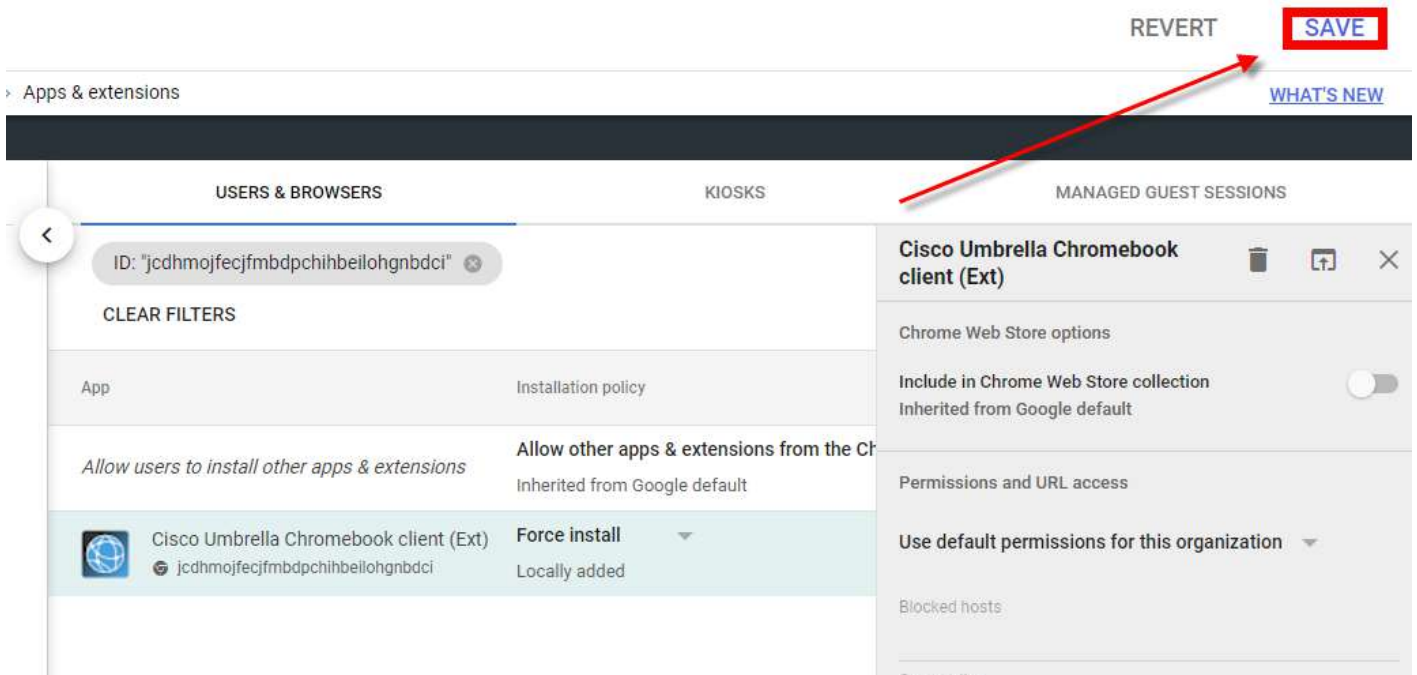

Part 3: Install the Cisco Umbrella Chromebook client Application

1. Log into <https://admin.google.com>.

- Users**
Add, rename, and manage users
- Company profile**
Update information about your company
- Billing**
View charges and manage licenses
- Apps**
Manage apps and their settings
- Support**
Talk with our support team
- Admin roles**
Add new admins
- Domains**
Add domains or domain aliases
- Reports**
Track usage of services
- Security**
Manage security features
- Groups**
Create groups and mailing lists

2. Select **Devices**.



Devices
Secure corporate data on devices


3. In the Device Management window, select **Chrome Management**.

DEVICE SETTINGS


Networks

Chrome management

4. In the Chrome Management window, select **Apps & extensions**.

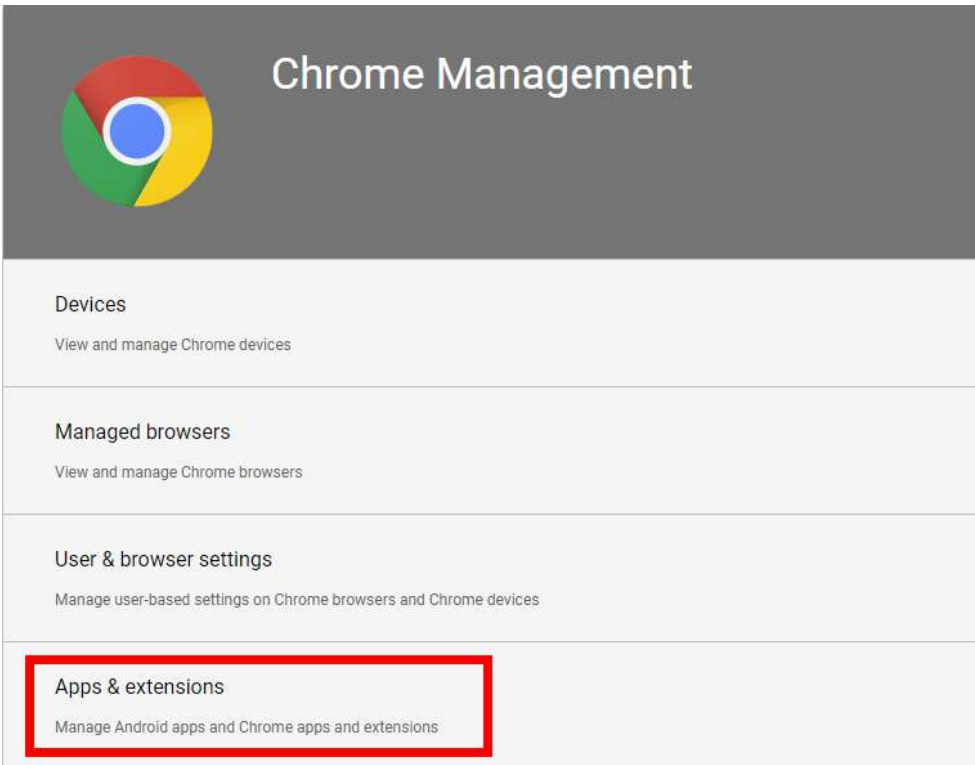

- 5. On the left side, select the OU of the **Users** you want to deploy the application to, or the top level domain if you want to push it to everyone.

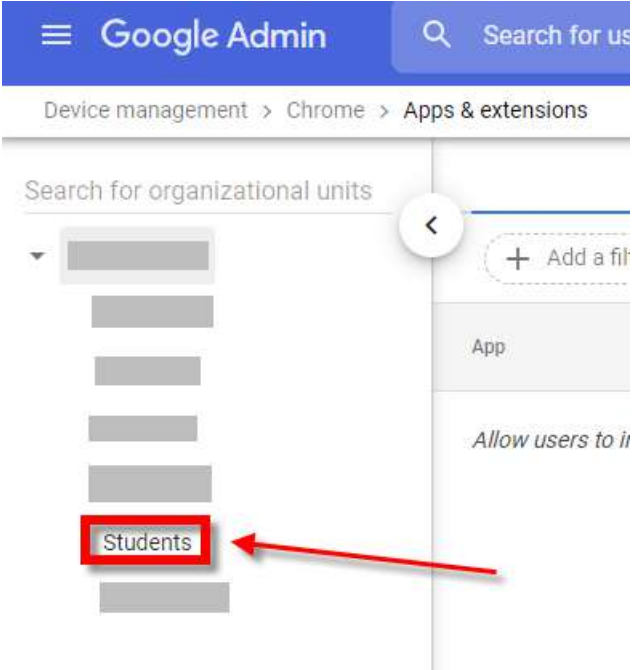

6. At the bottom right, click the **Yellow +** then click the icon that resembles a calculator.



7. Search for the ID of the Cisco Umbrella Chromebook client application **cpnjigmgeapagmdimmoenaghmhilodfg** then click **Save**.

(Searching by name will not work.)

Add Chrome app or extension by ID

Chrome apps and extensions can also be added by specifying the ID. If it is outside the Chrome Web Store, you must also specify the URL where the extension is hosted.


Extension ID

cpnjigmgeapagmdimmoenaghmhilodfg

From the Chrome Web Store ▾


CANCEL **SAVE**

8. Click on the drop down that currently says **Allow Install**




9. Select **Force Install**.


This ensures that Chromebook users in the selected Organization Unit cannot remove or disable the extension.

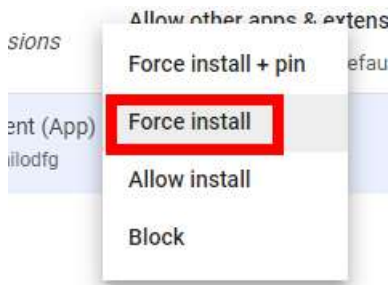

10. **Paste** the contents of the perviously saved json file in the Policy for extensions box

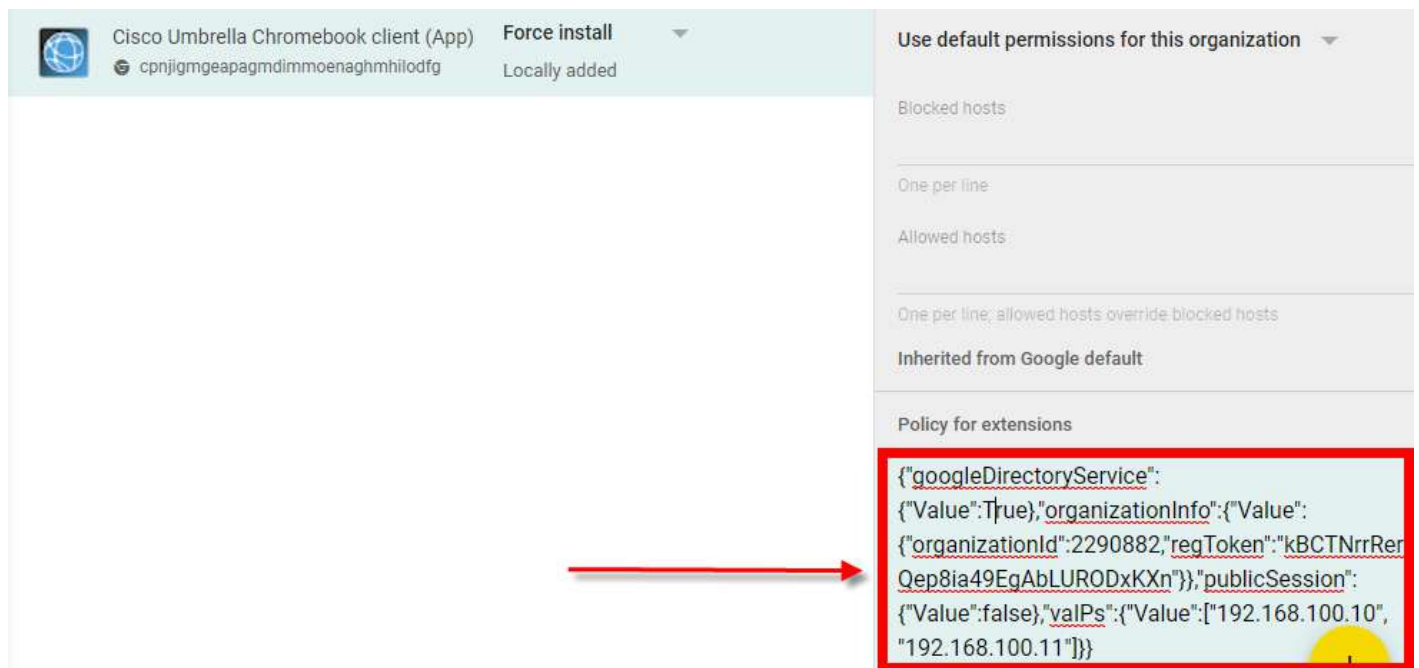

11. Select **Save**. You have finished installing the Cisco Umbrella Chromebook client **Application**

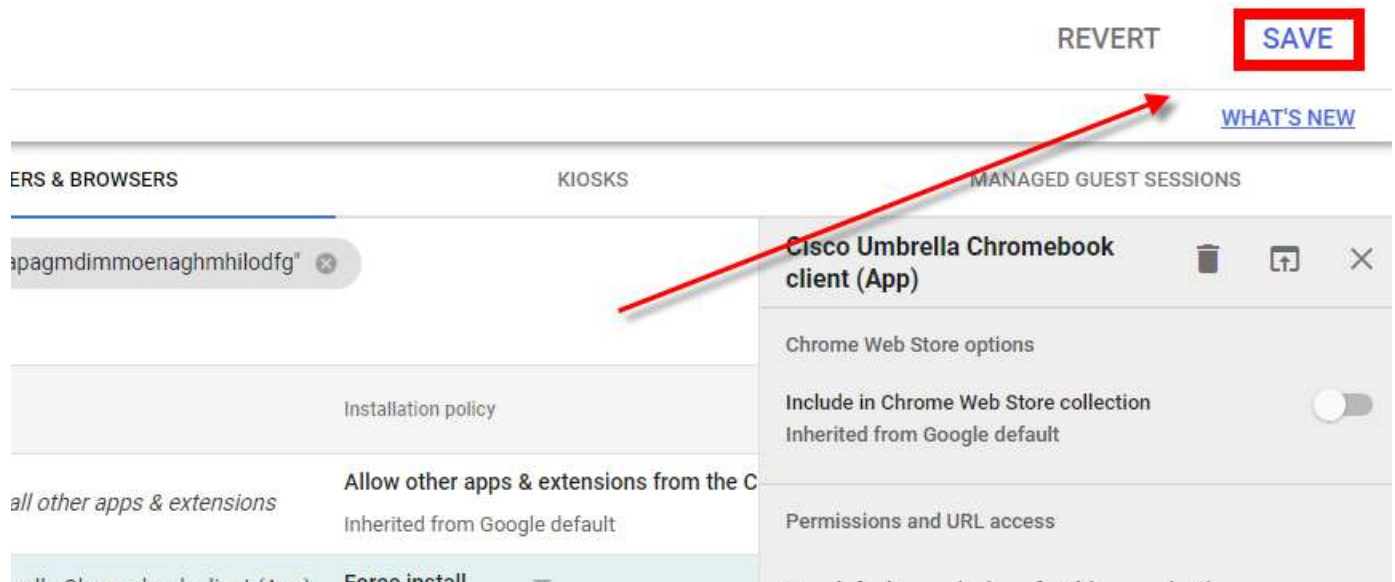

Installation Caveats

It can take Google four to eight hours to push the Cisco Umbrella Chromebook client to all of your Chromebooks. The Chromebooks must be connected and logged in for the installation to take place.

After the client is installed in a Chromebook, allow a few hours for Chromebook traffic to begin to appear in your Umbrella dashboard.

Apply Policies

To apply your policies to your organization's Chromebooks, see the [Cisco Umbrella Chromebook Client Policy Configuration Guide](#).

Make sure you have *deployed* the Cisco Umbrella Chromebook client before you configure policies. For more information, see the [Cisco Umbrella Chromebook Client Deployment Guide](#).

For general information about configuring policies in Cisco Umbrella, see [Create and Apply Policies](#).

Overview


The overall process is to create a Chromebook-specific policy that will work together with your "network usage" policy that applies to all devices connected to your networks. You place the Chromebook policy at the top of your policies list, so it will be invoked first. This ensures that the *Chromebook policy* is applied to your Chromebooks. Then your *network policy* comes into effect for all other devices connected to your network.

To maintain end-user privacy when Chromebooks are connected at remote locations, you can also disable *Content Logging* and include only security-related events in your reporting.

Create a Chromebook-specific policy


Follow these steps to create a policy to apply to all Chromebook users when connected to your network as well as *outside* of your networks.

1. Navigate to **Policies > Management > All Policies** and click **Add**. The Policy Wizard opens.

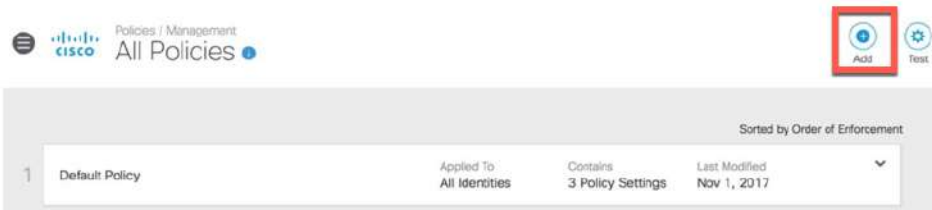

2. Select Chromebooks (some or all). Do not select any networks.

What would you like to protect?

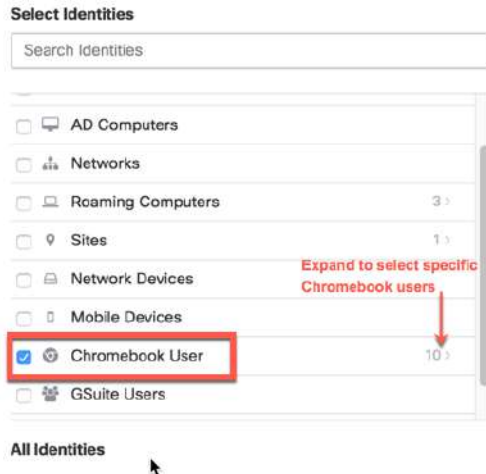

3. Click **Next**.
Choose the content settings and security settings to apply to Chromebooks. A common practice is to **enable the default security settings** and **disable content filtering to maintain user privacy**.
4. Expand **Advanced Settings** and turn off **Enable Intelligent Proxy**.
The Intelligent Proxy is not supported at this time.
Optionally, you can choose to log only Security Events to protect users' privacy.

Apply Destination Lists
Lists of destinations that can be explicitly blocked or allowed for any identities using this policy.

ADVANCED SETTINGS

Enable Intelligent Proxy
Gain visibility into threats, content, or apps by proxying web connections for risky domains.

- SSL Decryption**
Enabling SSL decryption allows the intelligent proxy to inspect traffic over HTTPS and block custom URLs in destination lists. Turning on SSL decryption allows HTTPS URL blocking.
- Enable IP-Layer Enforcement**
Gain visibility into threats that bypass DNS lookups by tunneling suspect IP connections. Note: this is only available for Roaming Computer identities.

SAFESEARCH

Enforce SafeSearch
Enforce SafeSearch for queries sent to supported search engines [Learn More](#)

ALLOW-ONLY MODE

Allow-Only Mode
In this mode, access to sites needs to be specifically granted; otherwise connections will be blocked by default.

LOGGING

- Log All Requests**
- Log Only Security Events**
Log and report on only those requests that match a security filter or integration, with no reporting on other requests.
- Don't Log Any Requests**
Note: No requests will be reported or alerted on. Unreported events will still be logged anonymously and aggregated for research and threat intelligence purposes.

5. Click **Next**. Generally no changes are needed to the Security Settings.
6. Click **Next**. Similarly, Content Access settings often remain the same.
7. Click **Next**. Make any needed changes to the Application Settings.
8. Click **Next**. Make any needed changes to Destination Lists.
9. Click **Next**.
The Custom block page, Bypass Users, and Bypass Codes features on this page are not yet supported by the Chromebook client.

Set Block Page Settings

Define the appearance and bypass options for your block pages.

Use Umbrella's Default Appearance
[Preview Block Page »](#)

Use a Custom Appearance

Choose an existing appearance ▼

Currently unsupported

BYPASS USERS

BYPASS CODES

9. Click **Next**. Give your policy a name (the name is arbitrary), then click *Save*.

Policy Summary

Policy Name

Chromebook Policy

10 Identities Affected

10 Chromebook Users

[Edit](#)

Security Setting Applied: Default Settings

- Command and Control Callbacks, Malware, and Phishing Attacks will be blocked
- No integration is enabled.

[Edit](#) [Disable](#)

Content Setting Applied: High

- Blocks adult-related sites, illegal activity, social networking sites, video sharing sites, and general time-wasters.

[Edit](#) [Disable](#)

2 Destination Lists Enforced

- 1 Block List
- 1 Allow List

[Edit](#)

File Inspection Not Enabled

Requires Intelligent Proxy

Umbrella Default Block Page Applied

[Edit](#) [Preview Block Page](#)

ADVANCED SETTINGS

[CANCEL](#)

[PREVIOUS](#)

[SAVE](#)

Your policy is automatically applied to Chromebooks. The process takes up to about 90 seconds.

Arrange policies in order

Policies in Cisco Umbrella are applied in sequence from the top of the Policy List down. **Make sure that your Chromebook policy appears above your network usage policy.** This ensures that your Chromebooks are protected by your Chromebook-specific policy and all devices on your network (that are not Chromebooks) are protected by your Network Access policy.

		Applied To	Contains	Last Modified	
1	Chromebook Policy	10 Identities	3 Policy Settings	Aug 28, 2018	▼
2	Network Access Policy	0 Identities	3 Policy Settings	Aug 28, 2018	▼

Trusted Network Detection


The version of the Cisco Umbrella Chromebook client (UCC) released November 28, 2018 introduced **trusted network detection**. Trusted network detection enables UCC to work with Umbrella virtual appliances (VAs) so that in a situation in which a network can be trusted by the UCC because it is protected by Umbrella VAs (for example, in an on-premise network), a Chromebook-specific policy can take precedence over the existing network policy.

How trusted network detection works


When the UCC detects a VA in a network, it sends the Chromebook user's identity to the VA and then deactivates. The VA continues to handle DNS requests from Chromebooks by appending the users' identities to all requests to Umbrella resolvers.

When the UCC fails to detect a VA, the UCC directly sends DNS requests to Umbrella resolvers.

This update is reflected in the following architecture diagrams. First is the **original** UCC architecture.

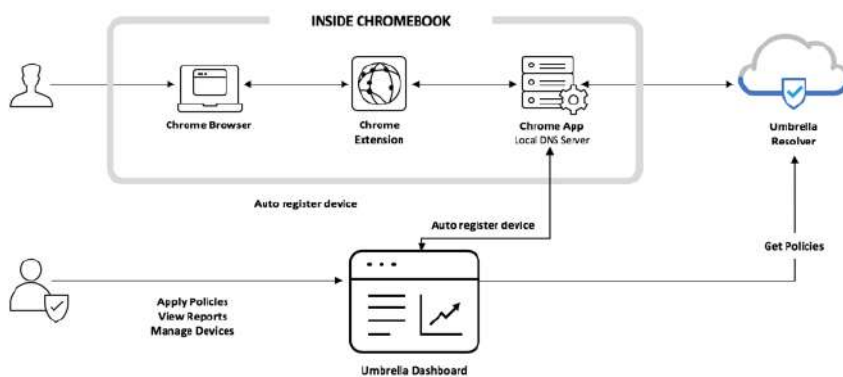

The November 28 release means the UCC system is better represented this way.

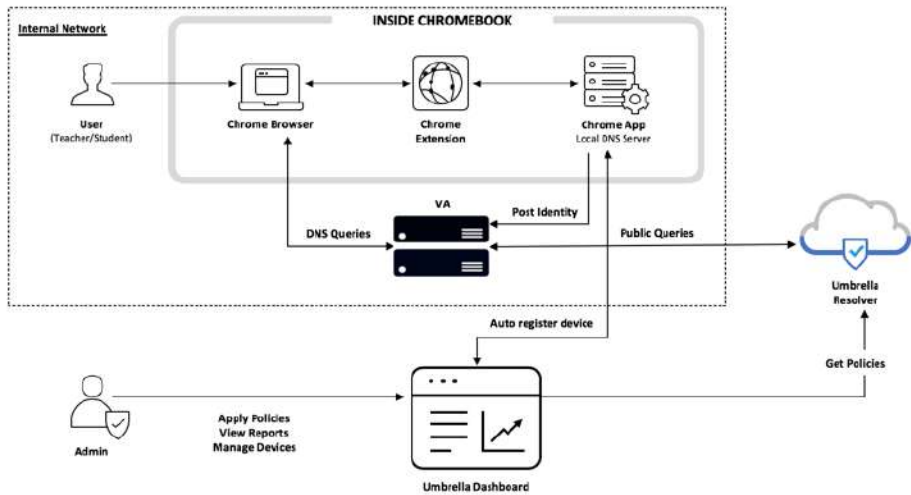

Important

In order to enable trusted network protection, both the Umbrella Chromebook client software **and** the Umbrella virtual appliance software must be updated.

Software requirements

In order to enable trusted network detection, the following minimum software versions are required:

- Umbrella Chromebook client extension 1.2.0
- Umbrella Chromebook client app 1.2.5
- Umbrella virtual appliance 2.3.2

Deploy the G Suite Identity Service

The G Suite identity service feature is an enhancement to the Cisco Umbrella Chromebook client and adds the Organizational Unit (OU)-based Umbrella policy enforcement capabilities. For overview information, refer to [Umbrella for G Suite Identity Service](#).

Enabling the G Suite Identity Service


Enabling the G Suite identity service for the Cisco Umbrella Chromebook client requires two steps:

- Install the *Cisco Umbrella Authorizer* marketplace app.
- Enter the G Suite account super administrator ID in the Cisco Umbrella dashboard.


Install the Cisco Umbrella Authorizer App

The *Cisco Umbrella Authorizer* marketplace application authorizes the scopes needed by Umbrella to retrieve information from your G Suite account. Follow these steps to install the app in your Google administration console:

1. Open your G Suite administration console, using the super administrator ID.
2. [Navigate to the app](#) in the Google marketplace.

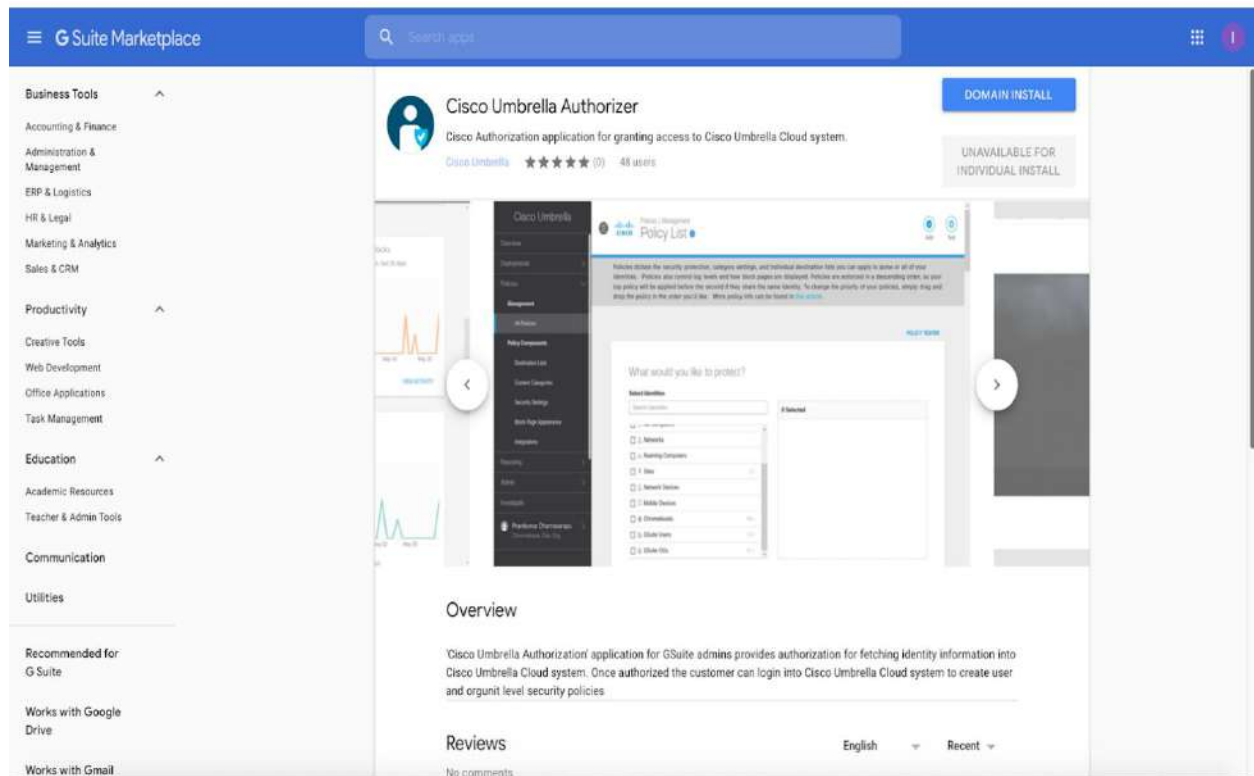

3. Click Domain Install, then in the dialog that appears, click Accept

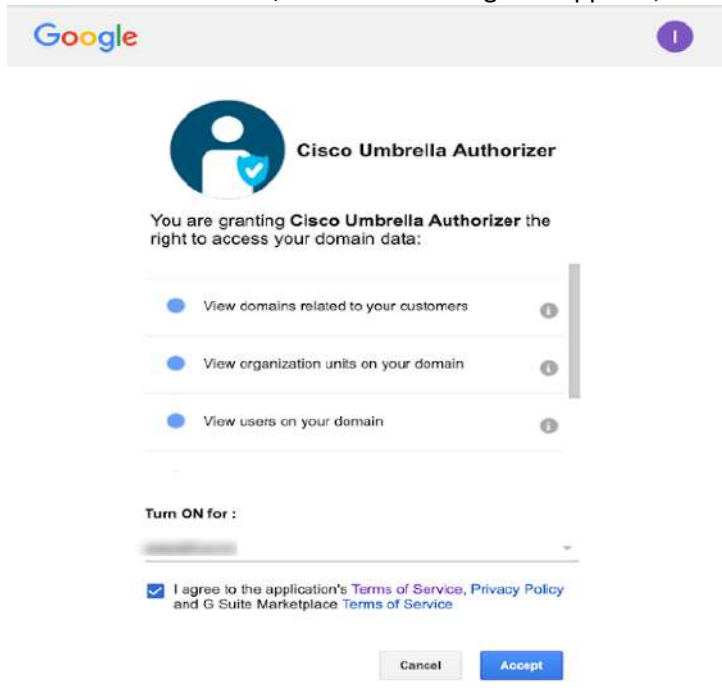

Enter your G Suite super administrator ID in the Umbrella Dashboard

1. In Cisco Umbrella, navigate to **Deployments > Chromebook Users**.
2. Click **Configure**. The *Configure Chromebook Umbrella Clients* window appears.

Configure Umbrella Chromebook Clients

Protecting Chromebook Computers

Enable Umbrella security for your Chromebooks by installing the Chromebook client Extension and App. You configure the Umbrella App by using the Google Admin Console to upload this data file


1. Download your organization's configuration file from the link below:

[chromebookconfig.json](#) (Size ~0.1 kB)

2. Install the Chromebook client software (Extension and App) by following the [Chrome Setup Guide](#).
3. Sign in with super admin email id of your Google Admin Console to sync GSuite identities into Umbrella.

SUPER ADMIN SIGN IN

-
3. Click **Super Admin Sign In**. In the window that appears, choose the super administrator account:

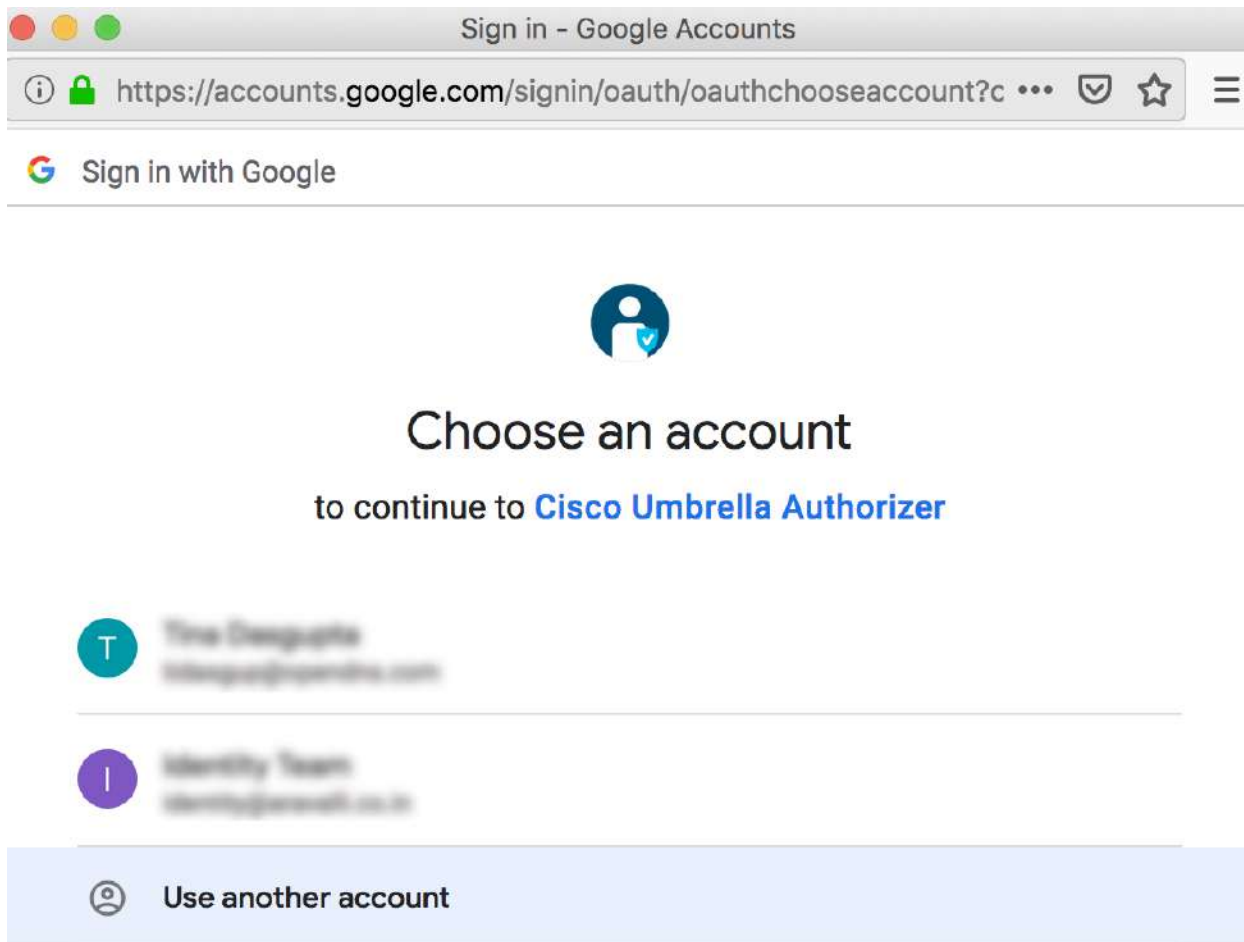

To continue, Google will share your name, email address, language preference, and profile picture with Cisco Umbrella Authorizer. Before using this app, you can review Cisco Umbrella Authorizer's [privacy policy](#) and [terms of service](#).

English (United States) ▾

[Help](#)

[Privacy](#)

[Terms](#)

4. Sign in to sync your G Suite identities with Cisco Umbrella. This can take up to 15 minutes.


The Umbrella Policies page displays two new containers: *G Suite OUs* and *G Suite Users*

REMEMBER! To add your G Suite OU's and Users to the correct policy or they will get the bottom default policy!


Removing Cisco Chromebook client software

To remove the software for a specific user:

1. Log into your G Suite admin console, then click **Users**.

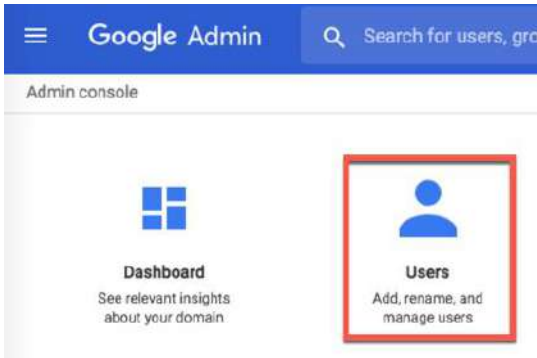

2. Choose a user, then choose **More > Change Organizational Unit**.

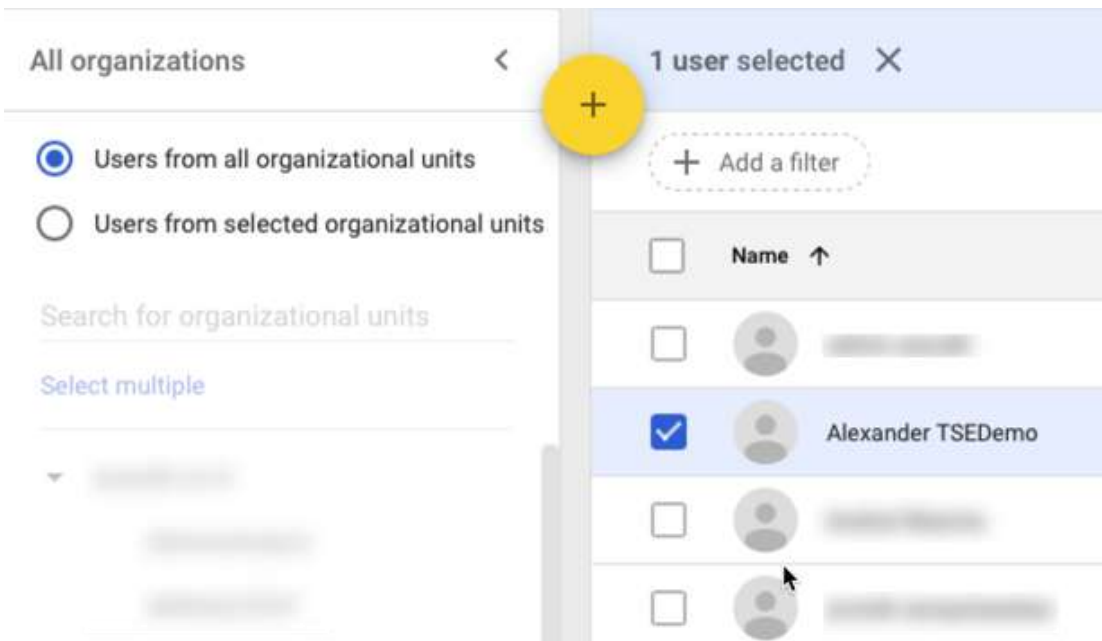

3. Click *Change** to confirm your choice.

User move confirmation Alexander TSEDemo

Please review the following that applies to the DemoOrg organization:

Some services may not be turned ON
The users will not be able to use the services that are not turned ON

Some service level settings may change for the selected users

Are you sure you want to move Alexander to DemoOrg?

This change may take up to 24 hours to take effect.

CANCEL

CHANGE

You have finished removing the Chromebook client for that user.

To remove the software for all members of an Organizational Unit (OU):

1. Follow the instructions for Installing the Cisco Umbrella Chromebook client **extension**.
2. Select the OU you wish to remove the extension from, then select Cisco Umbrella Chromebook client (Ext)
3. Click the **trash** icon to remove the extension, then click **SAVE**

The screenshot shows the 'Users & Browsers' section of the Cisco Umbrella management console. A table lists installed applications and extensions. The 'Cisco Umbrella Chromebook client (Ext)' is selected, and its details are shown in a right-hand pane. A red box highlights the trash icon in the top right of the details pane, and another red box highlights the 'SAVE' button in the top right of the console. Red arrows point from these boxes to the 'REVERT' and 'SAVE' buttons at the top of the console.

App	Installation policy
Allow users to install other apps & extensions	Allow other apps & extensions from the C Inherited from Google default
Cisco Umbrella Chromebook client (App) cpnjigmgeapagmdimmoenaghmhilodfg	Force install Locally added
Cisco Umbrella Chromebook client (Ext) jcdhmojfecjfmdbpchiinbeiohgnbdci	Force install Locally added

REVERT


SAVE

WHAT'S NEW

Roaming Client Setup

Windows/Mac OS

If you have Windows or MacOS devices that you would like to protect when they go offsite then you can download the roaming client for them. Navigate to Deployments->Roaming Computers and click on the Roaming Client download icon in the top right-hand corner. Then, download and install the client that pertains to that OS.

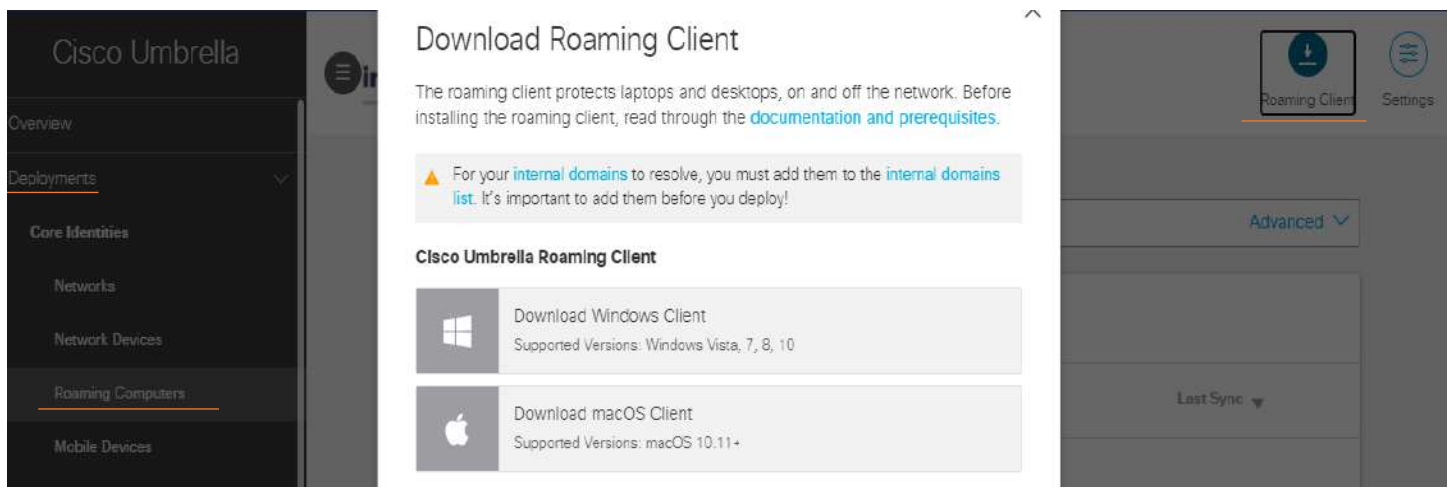

For more documentation and prerequisites please click [here](#).

iOS Mobile Security- iPads in Umbrella

The *Cisco Security Connector—Umbrella Setup Guide* only explains how to configure the Umbrella portion of the [Cisco Security Connector \(CSC\)](#). For information about how to configure your Mobile Device Manager (MDM) system, see your MDM system's documentation.

The Cisco Security Connector provides visibility and control for organization-owned and MDM managed mobile Apple iOS devices, such as iPhones and iPads. The CSC's Umbrella component directs DNS traffic, including functionality for the intelligent proxy, to the Cisco Umbrella cloud where filtering against malicious sites, such as phishing sites or sites that exfiltrate information, takes place.

The CSC's Umbrella portion does not require an on-demand or always-on VPN or a full proxy to gain complete visibility and control through cloud security (not locally on the device). This makes for both easier management and simpler, more effective security.

Note: Your iOS mobile device must be supervised and managed by an MDM system.

For more information about the Cisco Security Connector, see [Cisco Security Connector \(CSC\)](#).

Requirements

For the Cisco Security Connector:

- iOS device running iOS version 13.2 or higher.
- Your iOS device must be running in [supervised mode](#).
- Your iOS device must be managed using a Mobile Device Manager (MDM) system and Apple School Manager or Apple Business Manager.
- Five MB free space.

One of the following supported MDM systems:

- Meraki System Manager (SM) with API access enabled.
Note: Only System Manager and Combined network types are supported.
- Apple Configurator 2.5 or higher.
- IBM MaaS360.
- Intune.
- **Jamf.**
- MobiConnect
- MobileIron Enterprise Mobility Management (EMM) On-Prem and Cloud versions 9.4 or higher.
- Workspace ONE.
- Generic— **MOSYLE** - Other MDMs may be used to manage your organization-owned iOS mobile device; however, success results may vary. For more information, see [Register an iOS Device through a Generic MDM System](#).

For information about configuring your specific MDM system, see your MDM system's documentation or contact your MDM's support team.


You will also need:

- Cisco Umbrella account.

- Direct access to the IPv4 IP addresses 208.67.222.222 or 208.67.220.220 is required for IPv4 DNS protection on ports 53 and 443.
- Direct access to the IPv6 IP addresses 2620:119:35::35 or 2620:119:53::53, or access to IPv4 addresses on ports 53 and 443 through NAT64/DNS64 translation is required for IPv6 DNS protection.
Note: If DNS protection fails to engage, DNS traffic is not encrypted.
- The device must be able to communicate with `registration.polaris.qq.opendns.com` for registration and validation purposes at least once a day—when actively used—otherwise, the device cannot be protected.
- Depending on the MDM, you may also require each device's serial number.

1. Install the Cisco Security Connector App

1. On your iOS device, download and install the Cisco Security Connector app.
Get the Cisco Security Connector app from the [App store](#). Depending on your MDM, you may be able to deploy the Cisco Security Connector to supervised iOS mobile devices through your MDM.

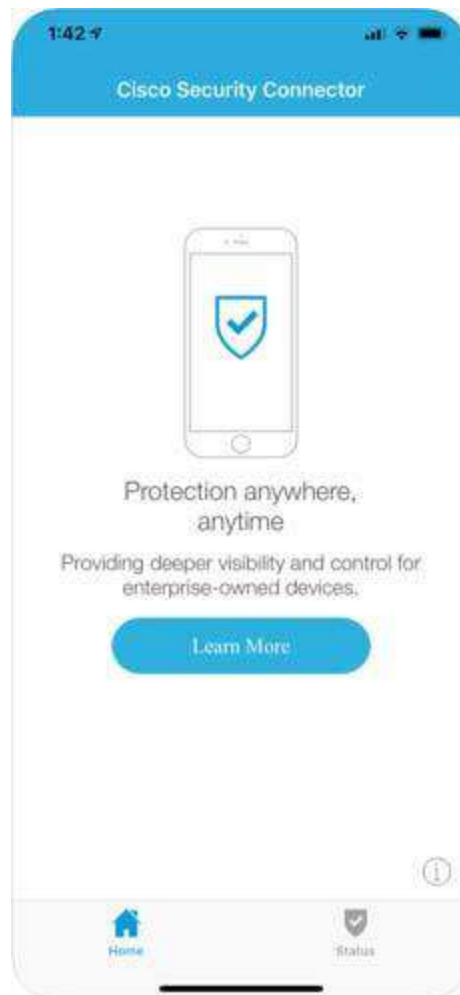


2. Add an Organization Administrator's Email Address

This is the email address that your end-user can use to send diagnostic reports from the app by clicking the **I** icon from within the iOS device. These reports can then be passed onto Cisco support. Once set, this email address is automatically added when managing an MDM.

1. Navigate to **Deployments > Core Identities > Mobile Devices** and click **Settings**.




2. In **Mobile Device Settings**, add an email address, select a notifications level, choose a device identification method, and click **Save**.

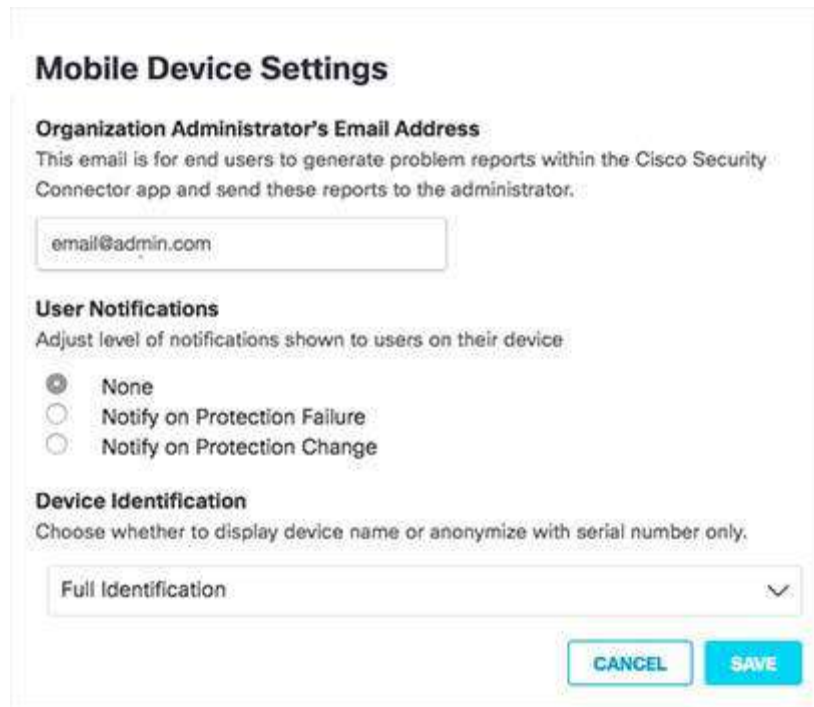


3. Register Your iOS Device Through Your MDM to Umbrella

1. In Umbrella, navigate to **Deployments > Core Identities > Mobile Devices** and click **Manage MDMs**.

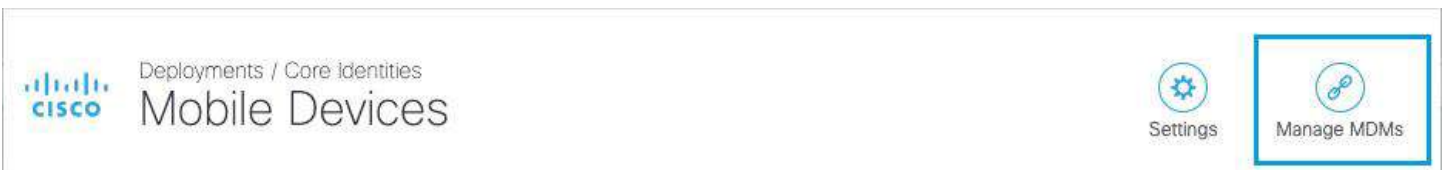

2. Click the appropriate MDM.

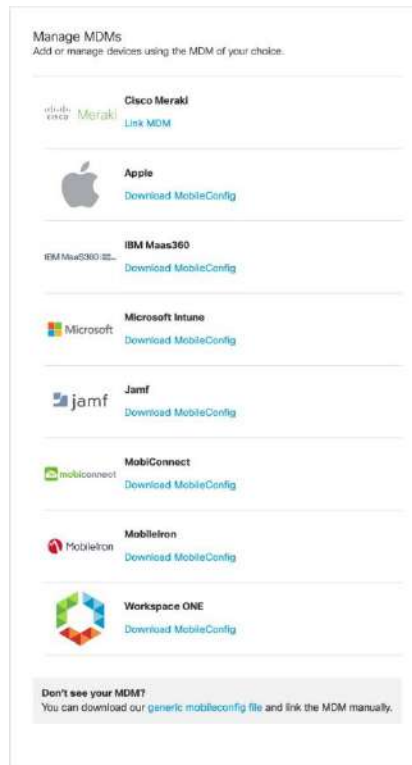

4. When you have successfully registered your iOS device, Umbrella lists it at **Deployments > Core Identities > Manage MDMs**.




Deployments / Core Identities
Mobile Devices



Label	Serial Number	Last Sync	OS Version	App Version	Mdm
WJC	C8PVV3JWJC6	2018	iOS 11.2	0.0.0	----

5. On your mobile device, in the Cisco Security Connector app, tap the **Status** icon and confirm that it shows **Protected by Umbrella**. For protection details, tap **Protected by Umbrella**.

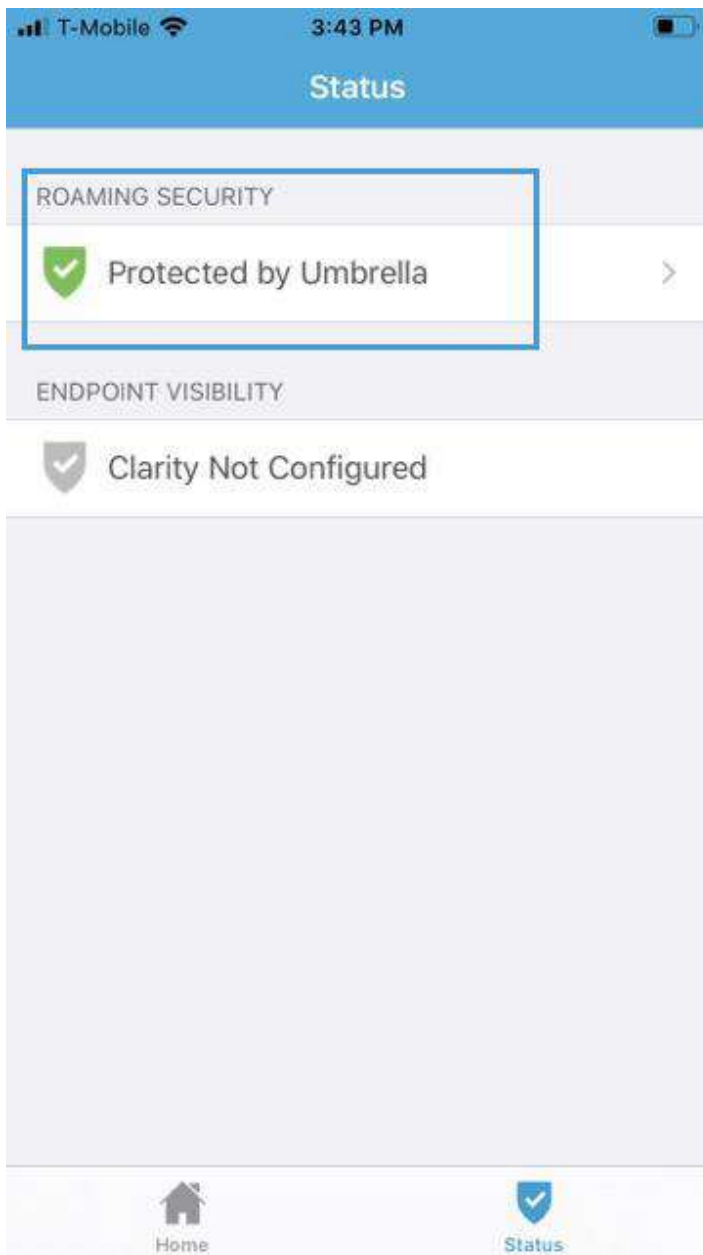

Jamf

By downloading an XML file from Umbrella, optionally updating it, and then pasting part of its contents into your Jamf system, Jamf is able to push configuration information to both the Cisco Security Connector (CSC) and Umbrella so that your iOS device is registered with Umbrella. The result is that your iOS device is protected by Umbrella.

For information about configuring Jamf, see Jamf's documentation.

Anonymization

Umbrella provides you with the option of anonymizing mobile devices for reporting and administration purposes. When you anonymize a mobile device, its label is hidden and replaced by your device's serial number. The label name is anonymized in both the Umbrella dashboard and in the CSC app UI. For information about how to anonymize your device, see [Anonymize Devices](#).


Prerequisites

- Jamf Pro 10.2.0 or higher.
- You must first configure your Jamf MDM system. Configure Jamf as required so that it is able to push configuration information to both CSC and Umbrella. For information about configuring Jamf, see Jamf documentation. For support, contact Jamf support.
- The Cisco Security Connector app is installed on your iOS device.
- iOS device running iOS version 13.2 or higher.
- Your iOS device must be running in [supervised mode](#).
- Your iOS device must be managed by Jamf and Apple School Manager or Apple Business Manager.
- You have [added an administrator email address](#).
This address is used by CSC to send you diagnostic reports that you can pass on to Cisco support as needed.
- You'll need the serial number for each iOS device to be registered with Umbrella.
- Cisco Umbrella account.
- Direct access to the IPv4 IP addresses 208.67.222.222 or 208.67.220.220 is required for IPv4 DNS protection on ports 53 and 443.
- Direct access to the IPv6 IP addresses 2620:119:35::35 or 2620:119:53::53, or access to IPv4 addresses on ports 53 and 443 through NAT64/DNS64 translation is required for IPv6 DNS protection.
Note: If DNS protection fails to engage, DNS traffic is not encrypted.
- If anonymizing devices, **Mobile Device Settings** are updated to **By Serial Number Only**. For more information see, [Anonymize Devices](#).
- Your iOS device must be able to communicate with .opendns.com for registration and validation purposes at least once a day.


Register Your iOS Device

Note: You must log into your Umbrella dashboard as an administrator.

1. In Umbrella, navigate to **Deployments > Core Identities > Mobile Devices** and click **Manage MDMs**.

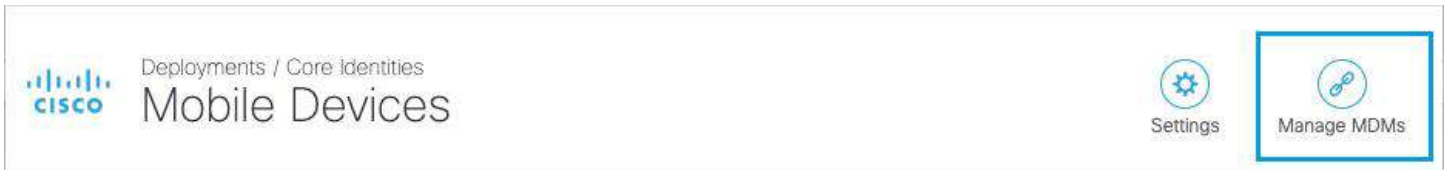

2. Under **Jamf**, click **Download MobileConfig**.

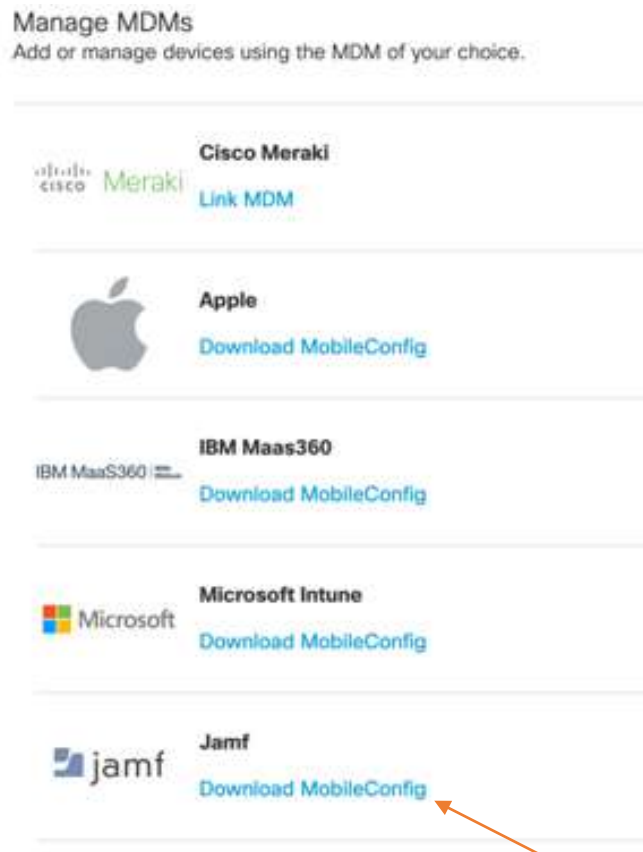

3. Add an email address to generate problem reports and click **Download**.

This email address is where diagnostic reports are sent when a user clicks the I icon from within the iOS device. Once set, this email address is automatically added when managing an MDM.

Download Jamf Mobileconfig

Organization Administrator's Email Address

This email is for end users to generate problem reports within the Cisco Security Connector app and send these reports to the administrator.

CANCEL

DOWNLOAD

4. Copy and paste the XML code between the `<!-- Jamf... -->` comments into your MDM profile.

- XML



5. In your new profile, applied for the CSC group, choose **Custom Settings** and then **Configure**. Paste the edited XML here. If successful, your mobile device registers with Umbrella and is listed at **Deployments > Core Identities > Sylvia Massy**. CSC on your mobile device updates to connect to Umbrella so that your iOS device is protected by Umbrella.
6. Example of what is put into the Config Profile in Jamf from the downloaded jamf.xml file obtained from Umbrella: (your organization id string and regToken will be different)

```

<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plist PUBLIC "-//Apple//DTD PLIST 1.0//EN" "http://www.apple.com/DTDs/PropertyList-1.0.dtd">
<plist version="1.0">
  <dict>
    <key>PayloadContent</key>
    <array>
      <dict>
        <key>AppBundleIdentifier</key>
        <string>com.cisco.ciscosecurity.app</string>
        <key>PayloadDescription</key>
        <string>Cisco Umbrella</string>
        <key>PayloadDisplayName</key>
        <string>Cisco Umbrella</string>
        <key>PayloadIdentifier</key>
        <string>com.apple.dnsProxy.managed,DBE2A157-E134-3E8C-B4FB-23EDF48A0CD1</
string>
        <key>PayloadType</key>
        <string>com.apple.dnsProxy.managed</string>
        <key>PayloadUUID</key>
        <string>E5D191FD-6E01-4733-9720-E27BFBCB8DC5</string>
        <key>PayloadVersion</key>
        <integer>1</integer>
        <key>ProviderBundleIdentifier</key>
        <string>com.cisco.ciscosecurity.app.CiscoUmbrella</string>
        <key>ProviderConfiguration</key>
<!-- Jamf - copy from here to paste into the Jamf UI to provision a DNS proxy -->
        <dict>
          <key>anonymizationLevel</key>
          <integer>0</integer>

```


INVENTORY

- Search Inventory
- Search VPP Content

CONTENT MANAGEMENT

- Configuration Profiles**
- Provisioning Profiles
- Personal Device Profiles
- Mobile Device Apps
- eBooks

GROUPS

- Smart Device Groups
- Static Device Groups
- Classes

ENROLLMENT

- Enrollment Profiles
- Enrollment Invitations
- PreStage Enrollments

SETTINGS

- Management Settings

New Mobile Device Configuration Profile

Options Scope

- Not Configured
- Single App Mode Not Configured
- Global HTTP Proxy Not Configured
- Single Sign-On Not Configured
- Font Not Configured
- AirPlay Not Configured
- AirPlay Security Not Configured
- Conference Room Display Not Configured
- AirPrint Not Configured
- Content Filter Not Configured
- Lock Screen Message Not Configured
- Notifications Not Configured
- Network Usage Rules Not Configured
- DNS Proxy** 1 Payload Configured
- TV Remote Not Configured

DNS Proxy

APP BUNDLE ID Bundle identifier of the app containing the DNS proxy network extension

PROVIDER BUNDLE ID Bundle identifier of the preferred DNS proxy extension


PROVIDER CONFIGURATION XML Vendor specific configuration values

```
<dict>
  <key>anonymizationLevel</key>
  <integer>0</integer>
  <key>disabled</key>
  <false/>
  <key>internalDomains</key>
  <array>
    <string>10.in-addr.arpa</string>
    <string>16.172.in-addr.arpa</string>
    <string>17.172.in-addr.arpa</string>
    <string>18.172.in-addr.arpa</string>
    <string>19.172.in-addr.arpa</string>
    <string>20.172.in-addr.arpa</string>
    <string>21.172.in-addr.arpa</string>
    <string>22.172.in-addr.arpa</string>
    <string>23.172.in-addr.arpa</string>
    <string>24.172.in-addr.arpa</string>
    <string>25.172.in-addr.arpa</string>
    <string>26.172.in-addr.arpa</string>
    <string>27.172.in-addr.arpa</string>
    <string>28.172.in-addr.arpa</string>
    <string>29.172.in-addr.arpa</string>
    <string>30.172.in-addr.arpa</string>
    <string>168.192.in-addr.arpa</string>
    <string>local</string>
    <string>msd.local</string>
    <string>msd.local</string>
  </array>
  <key>logLevel</key>
  <string>verbose</string>
  <key>orgAdminAddress</key>
  <string>damien.steele@maynard.k12.ar.us</string>
  <key>organizationId</key>
  <string>2304376</string>
  <key>regToken</key>
  <string>VNdQqqP2l45XRJmpu3wPWqFluV0wtf6j</string>
  <key>serialNumber</key>
  <string>${SERIALNUMBER}</string>
</dict>
```

Upload Provider Configuration XML

Mosyle

1. Download the Cisco Security Connector from the Apple Volume Purchase Program

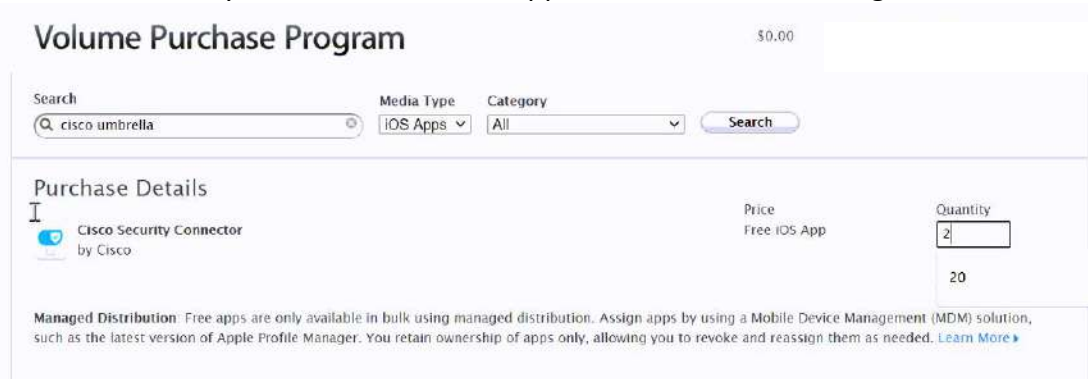

2. Push out the Cisco Security Connector App with Mosyle.
3. Download the Generic Mobileconfig file.

Example:

4. In Mosyle, navigate to DNS Proxy Extension and enter the following:

- Name – Cisco Umbrella
- App Bundle Id – com.cisco.ciscosecurity.app
- Provider Bundle ID - com.cisco.ciscosecurity.app.CiscoUmbrella
- Provider Configuration – everything in the generic mobile config file.xml from

```
<dict>
  <key>anonymizationLevel</key>
  <integer>0</integer>
  <key>disabled</key>
  <false/>
  ....
  ....
  ....
  <key>serialNumber</key>
  <string>{SERIAL_NUMBER}</string>
</dict>
```

- Replace SERIAL_NUMBER with %SERIALNUMBER%

Applicable only on supervised devices with iOS 11 or higher.

DNS Proxy Extension
Last Modified: a few seconds ago (v2)

Profile Name *
Cisco Umbrella

App Bundle ID *
Bundle Identifier of the app containing the DNS proxy network extension.
com.cisco.ciscosecurity.app

Provider Bundle ID
Bundle Identifier of the DNS proxy network extension to use
com.cisco.ciscosecurity.app.CiscoUmbrella

Provider Configuration **View available variables**
Vendor specific configuration values. To use the Serial Number as a string in the profile please enter the following variable in the Provider Configuration: %SerialNumber%
<dict>
 <key>anonymizationLevel</key>
 <integer>0</integer>
 <key>disabled</key>
 <false></false>
 <key>internalDomains</key>

Navigation: iOS/iPadOS, Dashboard, My School, Management, Class Manager, Preferences, Support

Applicable only on supervised devices with iOS 11 or higher.

DNS Proxy Extension
Last Modified: a few seconds ago (v2)

```

<string>22.172.in-addr.arpa</string>
<string>23.172.in-addr.arpa</string>
<string>24.172.in-addr.arpa</string>
<string>25.172.in-addr.arpa</string>
<string>26.172.in-addr.arpa</string>
<string>27.172.in-addr.arpa</string>
<string>28.172.in-addr.arpa</string>
<string>29.172.in-addr.arpa</string>
<string>30.172.in-addr.arpa</string>
<string>31.172.in-addr.arpa</string>
<string>168.192.in-addr.arpa</string>
<string>local</string>
</array>
<key>logLevel</key>
<string>verbose</string>
<key>orgAdminAddress</key>
<string>c.lk12.ar.us</string>
<key>organizationId</key>
<string>2240553</string>
<key>regToken</key>
<string>C6alRDSU</string>
<key>serialNumber</key>
<string>%SERIALNUMBER%</string>
</dict>

```

Navigation: iOS/iPadOS, Dashboard, My School, Management, Class Manager, Preferences, Support

5. Assign it to the students/staff/devices you want and push out those settings in Mosyle.



Label	Serial Number	Last Sync	OS Version	App Version	Mdm
WJC	C8PVV3JWJC6	2018	iOS 11.2	0.0.0	----

If you have anonymized your device (see [Anonymize Devices](#)), Umbrella hides the device's true label name by replacing it with the device's serial number. Existing active devices anonymize with 24 hours. New devices anonymize immediately.



Label	Serial Number	Last Sync	OS Version	App Version	Mdm
C8PVV3JWJC6	C8PVV3JWJC6	2018	iOS 11.2	0.0.0	----

As no changes can be made in Umbrella to the actual provisioned device, these mobile devices are simply listed in Umbrella as identities; however, you can now use Umbrella to apply policies to these mobile device identities. For more information, see [Apply Umbrella Policies](#).

Android Mobile Security

Umbrella has just recently released feature. If you would like to try it, please see the latest documentation [here](#).


Adding an additional Fixed/Static Network (MiFi/Jetpack)

Step 1 – Obtain a static IP/range from your ISP

First, determine the IP address of your network.

2. In Umbrella, navigate to **Deployments > Core Identities > Networks**.

You'll find your IP address listed at the top of the page. If you don't see your IP address, click the **i (Information)** icon.

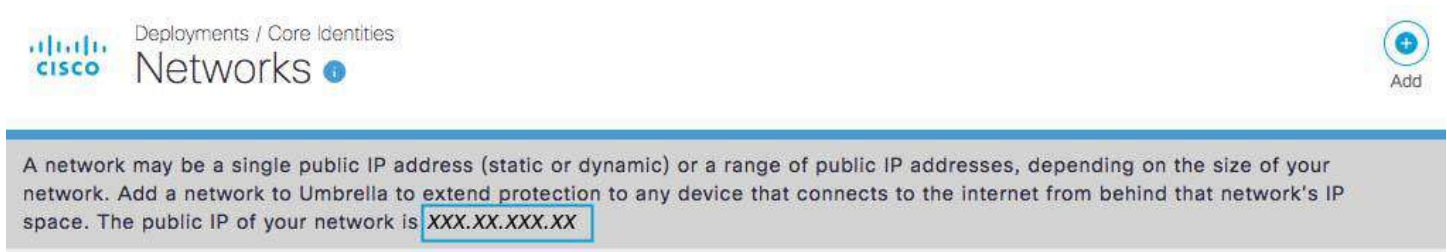

Pre-registering Your Networks

If you plan to have multiple network identities, it's a good idea to immediately register all of your networks with Umbrella. Chances are that if you have more than one public egress IP in your organization, you'll have more than one network identity. Having the networks pre-registered ensures that they're available right away when you do point traffic. It also ensures that all the IP space that belongs to your company is correctly assigned in our systems. Until traffic is pointed to Umbrella's DNS service, no protection is available and there is no reporting so there's no harm in adding all networks beforehand.

Step 2_– Set up the Network Identity

.Navigate to **Deployments > Core Identities > Networks** and click **Add**.



Note: If possible, add the network from the IP being registered; otherwise, an email is generated, which requires that a link is visited from the IP address of the network being registered.

2. In the **Add a New Network** modal, give your network identity a meaningful **Network Name**.

Giving your identity a good network name will help you find it easily when you later add a policy against it through the [Policy wizard](#).

Add a new network

Start by pointing your network's DNS to our servers:

IPv4: **208.67.220.220** and **208.67.222.222**

IPv6: **2620:119:35::35** and **2620:119:53::53**

Network Name

IPv4 only
 IPv6 only
 Mixed IPv4 & IPv6

IPv4 Address

 /

This network has a dynamic IP address. [Learn More >](#)

[CANCEL](#) [SAVE](#)

3. Select an internet protocol—IPv4, IPv6, or both.

Select a protocol based on the Umbrella IP address to which you have configured your router.

4. Add the network's IP address along with the subnet mask, usually a /32 subnet for IPv4 and /64 subnet for IPv6.

5. Click **Save**.

Once the service validates your IP address, the network is listed at **Deployments > Core Identities > Networks**. Initially, Umbrella lists your new network identity's status as **Inactive**. Network status only changes to **Active** when DNS traffic is sent to Umbrella from the network.

The policy applied to your new identity depends on your policy configurations. If you have a policy configured that includes network identities, Umbrella applies that policy; otherwise; Umbrella applies the Default policy.

Name	IP Address	Dynamic	Primary Policy	Status
Network Identity One	12.12.12.2		Default Policy	Inactive
Network Identity One	12.12.12.2		Default Policy	Active

Step 3 – Change the DNS Settings on Your Relevant Network Device

You need only do this on your edge DNS equipment, typically a DNS or DHCP server, or a router—this could be your DSL router or cable modem if that's the only router in your network. **Change DNS to 208.67.222.222 and 208.67.220.220**

Example for Verizon Orbic Hotspot:

RSD VZ Hotspot Orbic

DETAILS ASSIGNMENTS

Name

Save

Export

Cancel

Delete

Fields marked with an asterisk* are optional. If left empty or selection is "Not Managed", the existing value on the device will be used.

Wi-Fi

Security

Advanced

Mac Filter

MAC Filter Enabled

No

Add User's Device's Wi-Fi MAC Addresses

No

Add Wi-Fi MAC Addresses for Matching User Property

None

White Listed MAC Address

Blocked MAC Address

DNS Settings

Manual DNS Enabled

Yes

Manual DNS Address 1

208.67.222.222

Manual DNS Address 2

208.67.220.220


RFC1918 Private IP Address Ranges

Disabled

Loopback Address Range Included

Excluded

Login to Umbrella with the laptop or device that is connected to the MiFi you are setting up and click on Verify from that device:


Name ▲	IP Address	Dynamic	Primary Policy	Status
DIS-Public			Default Policy	Active
VZ-MiFi-63.46.50.221			Default Policy	 Verifying VERIFY

Step 4 – Test Your Network after it’s verified and active

Verify that your DNS connections are routed through Cisco Umbrella's global network by navigating to the following page in your client's browser: <https://welcome.umbrella.com/>. You should see the Welcome to Umbrella page.

Note: You may need to restart your client's network interface or your computer.

To test your security settings, navigate to <http://examplemalwaredomain.com/>.

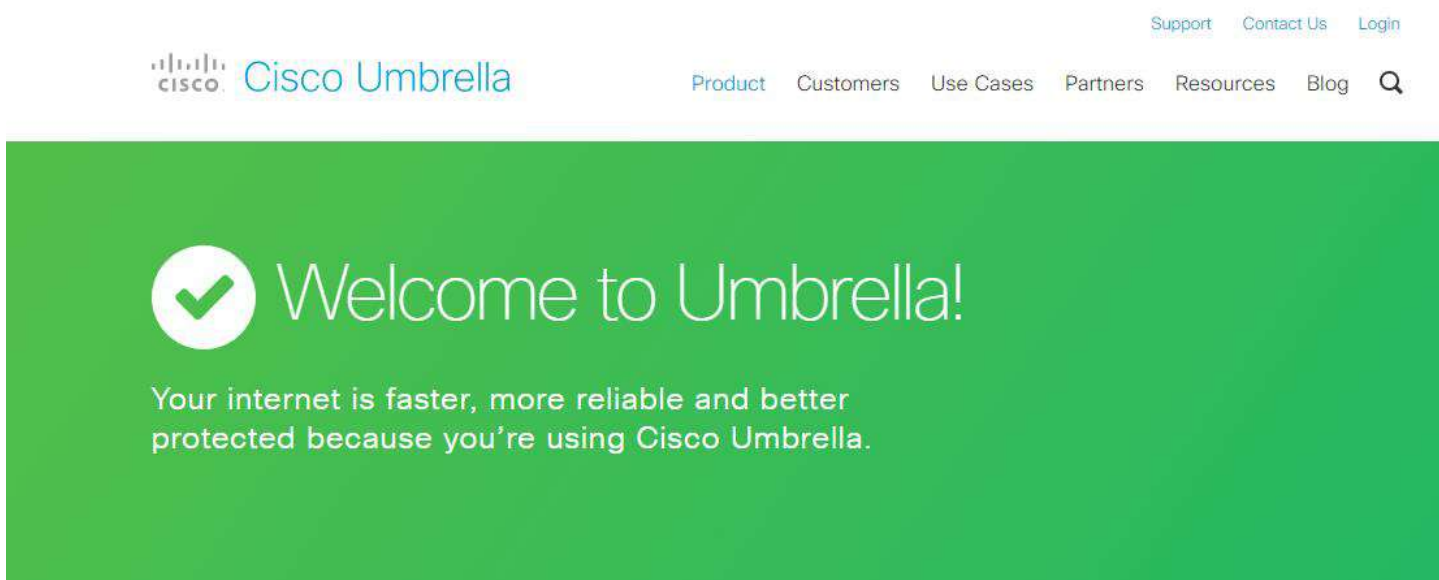

Appendix:

Application Category Descriptions

- **Ad Publishing**—Applications that enable publishers and ad networks to manage ad serving and trafficking.
- **Anonymizer**—Services that provide an anonymous proxy tool that attempts to make activity on the Internet untraceable.
- **Application Development and Testing**—Applications suited for application development and testing cycles, or for building integration applications in the cloud and within the enterprise.
- **Backup and Recovery**—Applications for backup and recovery of file systems and raw data stores on servers and desktop systems.
- **Business Intelligence**—Applications for analytics such as dashboards, reporting systems, scenario modeling, and data analysis.
- **Cloud Broker**—Applications that manage the use, performance, and delivery of cloud services and negotiate relationships between cloud providers and cloud consumers.
- **Cloud Carrier**—Intermediary that provides connectivity and transport of cloud services between cloud consumers and cloud providers through a network, telecommunication, and other access devices.
- **Cloud Service Provider**—Based on NIST definition of a cloud service, which we believe is being (slowly) adopted as the industry standard. The NIST definition includes the following criteria: "on-demand self-service, rapid elasticity, and measured service. CASI additionally adds vendor intent to provide computing-related services (Compute, Network, Storage and/or Software Application). If in doubt whether web or cloud, we will be conservative and assume cloud until we can prove otherwise.
- **Cloud Storage**—Applications that offer massively scalable storage capacity that can be used for applications, and file storage.
- **Collaboration**—Applications that enhance communication and collaboration in workgroups, within enterprises, and across enterprises.
- **Compute**—Fundamental computing resources for running cloud-based systems that can be dynamically provisioned and configured as needed.
- **Content Delivery Network (CDN)**—Applications that store content and files to improve the performance and cost of delivering content for web-based systems by offering a large distributed system of servers deployed in multiple data centers across the Internet.

- **Content Management**—Applications for managing the production of and access to content, enforcing document production workflows, and providing workspaces for groups or enterprises to find and access documents.
- **Customer Relationship Management (CRM)**—Applications that manage interactions with current and future customers, including organization and automation across sales, marketing, and customer service functions.
- **Database Management**—Applications offering scalable data management solutions for structured or unstructured data, relational database solutions or scalable non-SQL datastores.
- **E-Commerce**—Applications that facilitate the buying and selling of products or services.
- **Education**—Applications that provide educational or training courses, general learning opportunities or specific employee training independent of their location.
- **Enterprise Resource Planning (ERP)**—Applications that manage operations or management of a business; which can include internal and external resources, including tangible assets, financial resources, materials, and human resources.
- **Financial Services**—Applications for managing financial processes and information.
- **Games**—Online and mobile games.
- **Healthcare**—Healthcare related apps and services.
- **Hosting Services**—Applications that enable corporate or individual websites or other content to be accessible over the internet.
- **Human Resources**—Applications for managing human resources and HR functions.
- **IT Service Management**—Applications that support specific IT functions to plan, deliver, operate and control IT services.
- **Legal**—Applications that provide access to legal documents and public records and support legal content.
- **Marketing & Sales**—Applications that are specifically designed for marketing and sales functions.
- **Media**—Applications that host or stream media as a service.
- **Office Productivity**—Applications for producing information and other standard office-oriented tasks such as documentation, presentations, project management, etc.
- **Others**—Used for those services where no existing categorization would fit.
- **P2P**—Peer to Peer torrents like apps and protocols.
- **Search**—Web or app-based search.

- **Security**—Applications that support security activities to ensure adherence to regulatory compliance rules and protect information, data applications, and infrastructure.
- **Service Management**—Applications that support general operational activities outside of the IT function.
- **Shopping**—Web or app-based basic online shopping.
- **Social Networking**—Applications that establish and maintain a connection among users that are tied in one or more specific types of interdependency.
- **Software Repository**—Software repositories.
- **Travel**—Travel-related apps and services.
- **Web Content**—Mostly app-based services that provide content. It can be via login and/or paid portal.

Content Category Descriptions

- **Academic Fraud**—Sites that promote educational fraud, including but not limited to plagiarism and cheating.
- **Adult:**
 - **Adult Themes**—Sites that are adult in nature and are not defined in other rating categories.
Note: Select this category only if you want to be very restrictive on your network.
 - **Sexuality**—Sites that provide information, images or implications of bondage, sadism, masochism, fetish, beating, body piercing or self-mutilation. This category is not intended for LGBT-related sites that do not fall under the aforementioned criteria.
- **Alcohol**—Sites about alcohol use, commercial and otherwise.
- **Arts**—Galleries and exhibitions; artists and art; photography; literature and books; performing arts and theater; musicals; ballet; museums; design; architecture. Does not include [movies](#) or [television](#).
- **Astrology**—Astrology; horoscope; fortune-telling; numerology; psychic advice; tarot.
- **Auctions:**
 - **Auctions**—Sites for buying and selling through an auction.
 - **Classifieds**—Sites for buying and selling (or bartering) goods and services. Includes sites with real estate and housing listings.

- **Automotive**—Sites about automobiles, including manufacturers, news, reviews, and hobbyist information.
- **Business Services**—Sites for corporations and businesses of all sizes, especially company websites.
- **Chat:**
 - **Chat**—Sites where you can chat in real-time with groups of people. Includes IRC and video chat sites.
 - **Instant Messaging**—Sites that offer access or software to communicate in real-time with other individuals.
 - **Child Abuse Content (CAC)**—Sites that contain child sexual abuse content. For more information, see the [Internet Watch Foundation](#).
- **Computer Security**—Offering security products and services for corporate and home users.
- **Dating**—Sites for meeting other people.
- **Digital Postcards**—Dating, online personals, matrimonial agencies.
- **Dining and Drinking**—Eating and drinking establishments; restaurants, bars, taverns, and pubs; restaurant guides and reviews.
- **DIY Projects**—Guidance and information to create, improve, modify, decorate and repair something without the aid of experts or professionals.
- **Drugs**—Sites about illegal or recreational drug use.
- **Dynamic and Residential**—IP addresses of broadband links that usually indicate users attempting to access their home network, for example for a remote session to a home computer.
- **Ecommerce/Shopping**—Sites that are online stores for products and services.
- **Educational Institutions**—Sites for schools, covering all age levels and types.
- **Entertainment:**
 - **Anime/Manga/Webcomic**—Sites that host online comics, cartoons, and graphic novels.
 - **Fashion**—Clothing and fashion; hair salons; cosmetics; accessories; jewelry; perfume; pictures and text relating to body modification; tattoos and piercing; modeling agencies. Dermatological products are classified as Health and Nutrition.
 - **File Storage**—Sites that offer space for hosting, sharing and backup of digital files.
 - **File Transfer Services**—File transfer services with the primary purpose of providing download services and hosted file sharing.
 - **Financial Institutions**—Sites for banks, brokerages, trusts, and other financial organizations.

- **Freeware and Shareware**—Providing downloads of free and shareware software.
- **Gambling**—Sites that offer gambling or information about gambling.
- **Games**—Sites that offer gameplay and information about games (news, tips, cheat codes).
- **German Youth Protection**—Content deemed harmful to minors. This category helps prevent viewing of youth-endangering content in Germany. Block pages for this category will include German text. This list is not controlled by Umbrella and is created to be controlled by the BPjM (Federal Review Board for Media Harmful to Minors) to be compliant with German Law. For more information, see [General Information](#).
Note: We do not guarantee compliance with German law.
- **Government**—Sites operated by government agencies, including city, state, regional, county and federal levels. Also includes .mil domains.
- **Hacking**—Discussing ways to bypass the security of websites, software, and computers.
- **Hate/Discrimination**—Sites that promote intolerance based on gender, age, race, nationality, religion, sexual orientation or other group identities.
- **Health and Fitness**—Sites that offer information about health care and health services. Includes fitness related sites and information about health and fitness.
- **Humor**—Sites that are intended to be funny or humorous.
- **Hunting**—Professional or sports hunting, gun clubs, and other hunting-related sites.
- **Illegal Activities:**
 - **Illegal Activities**—Promoting crime, such as stealing, fraud, illegally accessing telephone networks; computer viruses; terrorism, bombs, and anarchy; websites depicting murder and suicide as well as explaining ways to commit them.
 - **Terrorism**—Sites that promote terrorism or are linked with terrorist organizations.
- **Illegal Downloads**—Providing the ability to download software or other materials, serial numbers, key generators, and tools for bypassing software protection in violation of copyright agreements. Torrents are classified as Peer File Transfer.
- **Infrastructure:**
 - **URL Shortener**—An online application or service that converts a regular URL into a condensed format.
 - **Infrastructure**—Content delivery infrastructure and dynamically generated content; websites that cannot be classified more specifically because they are secured or otherwise difficult to classify.

- **Internet Telephony**—Telephonic services using the internet.
- **IT-ADM**—Sites that offer gambling or information about gambling and tobacco. For more information, see the [Italian Nacional Agency](#).
- **IT-AGCOM**—Sites that are deemed to infringe on intellectual property. For more information, see the [Italian National Agency](#).
- **Jobs/Employment**—Sites that offer job listings, resume services, interview coaching, and similar employment-related services.
- **Lingerie/Bikini**—Sites displaying or dedicated to lingerie/bikini that could be considered adult-only.
- **Lotteries**—Sweepstakes, contests, and state-sponsored lotteries.
- **Military**—Military, such as the armed forces, military bases, military organizations, anti-terrorism.
- **Mobile Phones**—Short Message Services (SMS); ringtones and mobile phone downloads. Cellular carrier websites are included in the Business and Industry category.
- **Nature**—Natural resources; ecology and conservation; forests; wilderness; plants; flowers; forest conservation; forest, wilderness, and forestry practices; forest management (reforestation, forest protection, conservation, harvesting, forest health, thinning, and prescribed burning); agricultural practices (agriculture, gardening, horticulture, landscaping, planting, weed control, irrigation, pruning, and harvesting); pollution issues (air quality, hazardous waste, pollution prevention, recycling, waste management, water quality, and the environmental cleanup industry); animals, pets, livestock, and zoology; biology; botany.
- **News/Media**—Sites that offer news and information, including newspapers, broadcasters, and other publishers.
- **Non-Profits**—Sites for non-profit or charity organizations and services.
- **Nudity**—Sites that provide images or representations of nudity.
- **Online Communities:**
 - **Blogs**—Personal Sites or group journals, diaries or publications.
 - **Forums/Message Boards**—Sites with discussions, including bulletin boards, message boards, and forums.
- **Online Meetings**—Online meetings, desktop sharing, remote access, and other tools that facilitate multi-location collaboration.
- **Online Trading**—Online brokerages; websites that enable the user to trade stocks online; information relating to the stock market, stocks, bonds, mutual funds, brokers, stock analysis and commentary, stock screens, stock charts, IPOs, stock

splits. Services for spread betting on stocks and shares are classified as Gambling. Other financial services are classified as Finance.

- **Organizational Email**—Websites used to access business email (often through Outlook Web Access).
- **P2P/File Sharing**—Sites that facilitate the sharing of digital files between individuals, especially through peer-to-peer software, including torrent sites.
- **Paranormal**—UFOs, ghosts, cryptid, telekinesis, urban legends, and myths.
- **Parked Domains**—Sites that are placeholders "parked" for future use. Current uses may include single-page advertising sites.
- **Personal Sites**—Websites about and from private individuals; personal homepage servers; websites with personal contents; personal blogs with no particular theme.
- **Personal VPN**—Virtual private network (VPN) sites or tools that are typically for personal use and may or may not be approved for corporate usage.
- **Photo Search and Images:**
 - **Visual Search Engines**—Sites for searching for images based on keywords.
 - **Photo Sharing**—Sites for sharing photographs, as individual images, galleries, and albums.
- **Politics**—Sites about politics, politicians, political parties and organizations. Government sites are separate.
- **Pornography**—Anything relating to pornography, including mild depiction, soft pornography or hard-core pornography.
- **Professional Networking**—Social networking for career or professional development. See also [Social Networking](#).
- **Proxy/Anonymizer**—Sites providing proxy bypass information or services. Also, sites that allow the user to surf the net anonymously, including sites that allow the user to send anonymous emails.
- **Real Estate**—Information that would support the search for real estate; office and commercial space; real estate listings, such as rentals, apartments, and homes; house building.
- **Religious**—Sites about religion, religious teachings and groups, and spirituality.
- **Research/Reference**—Sites such as encyclopedias, dictionaries as well as other research-related resources.
- **SaaS and B2B**—Web portals for online business services; online meetings.
- **Safe for Kids**—Directed at, and specifically for, young children.

- **Science and Technology**—Science and technology, such as aerospace, electronics, engineering, mathematics, and other similar subjects; space exploration; meteorology; geography; environment; energy (fossil, nuclear, renewable); communications (telephones, telecommunications).
- **Search Engines and Portals:**
 - **Search Engines**—Sites that offer result listings based on keywords.
 - **Portals**—Sites that offer gateways to the Internet as a whole, often including bundled services on their site.
- **Sex Education**—Factual websites dealing with sex; sexual health; contraception; pregnancy.
- **Social Networking**—Sites that promote interaction and networking between people.
- **Social Science**—Sciences and history related to society; archaeology; anthropology; cultural studies; history; linguistics; geography; philosophy; psychology; women's studies.
- **Society and Culture**—Family and relationships; ethnicity; social organizations; genealogy; seniors; child-care.
- **Software/Technology**—Sites about computing, hardware, and technology, including news, information, code and vendor information.
- **Software Updates**—Websites that host updates for software packages.
- **Sports**—Sites about sports of all kinds, from professional to amateur, from news to league information and schedules. Includes martial arts and MMA related sites.
- **Streaming Audio:**
 - **Music**—Sites about music, including news, band and fan information.
 - **Radio**—Sites that offer online radio listening or promote radio stations.
 - **Podcasts**—Sites that offer podcasts, digital media files distributed over the Internet, often using syndication feeds, for playback on portable media players and personal computers. Both audio and video podcasts are included.
- **Streaming Video:**
 - **Movies**—Sites that promote movies or offer movie watching online.
 - **Video Sharing**—Sites for sharing video content.

- **Tasteless**—Sites that contain information on such subjects as mutilation, torture, horror, or the grotesque. Includes pro-anorexia and pro-suicide related sites.
- **Television**—Sites that promote television shows or offer television watching online.
- **Tobacco**—Sites about tobacco use and related products, commercial and otherwise.
- **Travel**—Sites with travel information and services, including reservations for airlines, cars, hotels, vacations, and trips.
- **Weapons**—Sites about weapons, commercial and otherwise.
- **Web Hosting**—Website hosting; bandwidth services.
- **Web Page Translation**—Translation of web pages between languages.
- **Webmail**—Sites that offer the ability to send or receive email.

Troubleshooting

What Policy is being applied?

Windows or Mac

The first step is to collect the debug output from the client machine that you wish to determine the applied policy for. Debug output can be gathered by running the following commands from a command prompt on Windows, or a Terminal window on OS X:

```
nslookup -q=txt debug.opendns.com
```

The output should look similar to this:

```
c:\>nslookup -q=txt debug.opendns.com
Server:  resolver1.opendns.com
Address:  208.67.222.222

Non-authoritative answer:
debug.opendns.com      text =
        "server 3.pao"
debug.opendns.com      text =
        "flags 20 0 47E4 D000000000000041"
debug.opendns.com      text =
        "originid 23443359"
debug.opendns.com      text =
        "orgid 162145"
debug.opendns.com      text =
        "actype 0"
debug.opendns.com      text =
        "bundle 147229"
debug.opendns.com      text =
```

For our purpose, the important information here is the OrgID and the Bundle. The OrgID is the identifier of your organization's dashboard, and the Bundle is the identifier of the applied policy within that organization.

Next, log in to your Umbrella dashboard and open a new tab or window in the browser. Then, plug the two variables pulled from the debug output into the URL below:



<https://dashboard.umbrella.com/o/<OrgID>/#/configuration/policy/<Bundle-ID>>

This will take you directly to the policy that was applied to the computer (or user) the debug output was run on, at the time it was run.

Chromebook

Access the diagnostic page by browsing to <http://localhost:8029/debug> in a new tab.

The output should look similar to this:

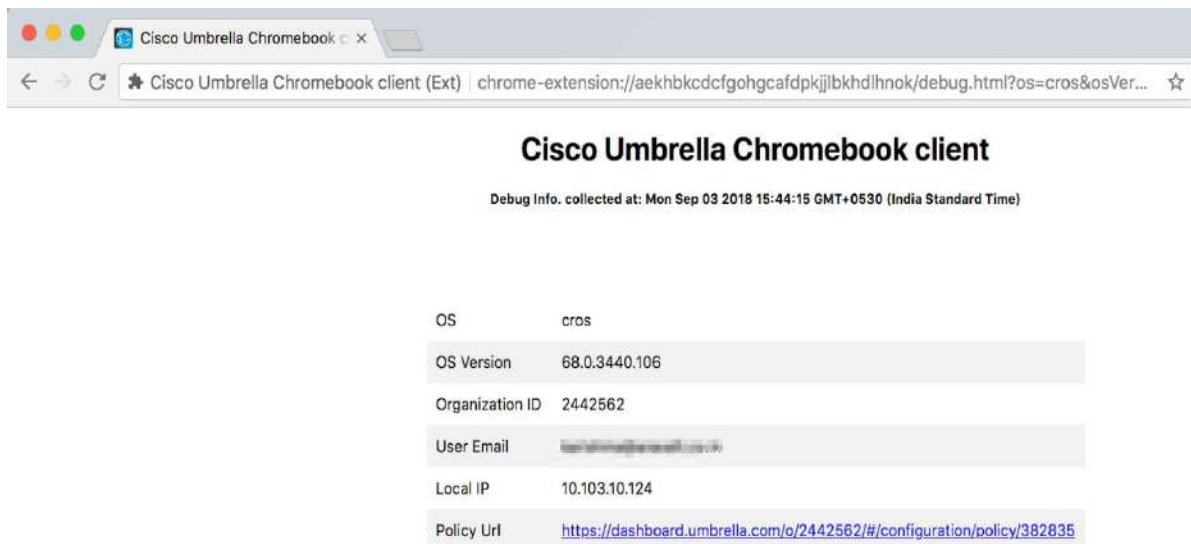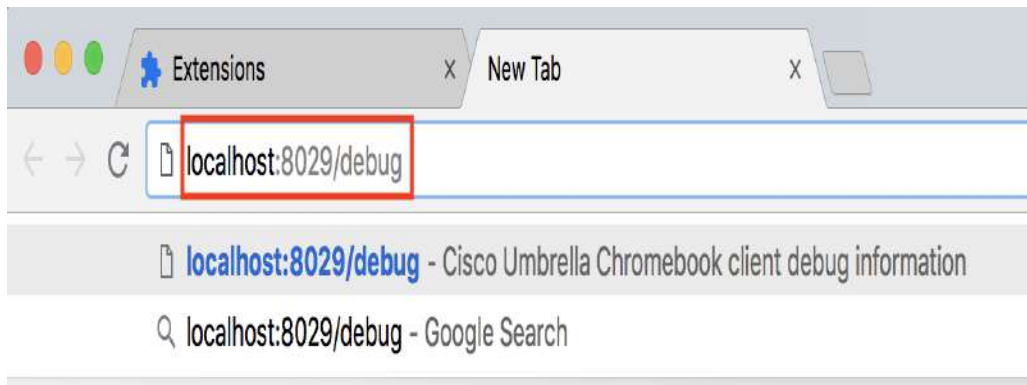


For our purpose, the important information here is the "OrganizationID" and the "Policy Url". The "OrganizationID" is the identifier of your organization's dashboard, and the "Policy Url" is the identifier of the applied policy within that organization.

Next, log in to your Umbrella dashboard and open a new tab or window in the browser. Then, navigate to the "Policy Url" which will take you directly to the policy that was applied to the computer (or user) the debug output was run on, at the time it was run.

Gathering or clearing AD Connector Logs

A functional AD Connector is green. Grey, yellow, and red statuses usually reflect a problem.

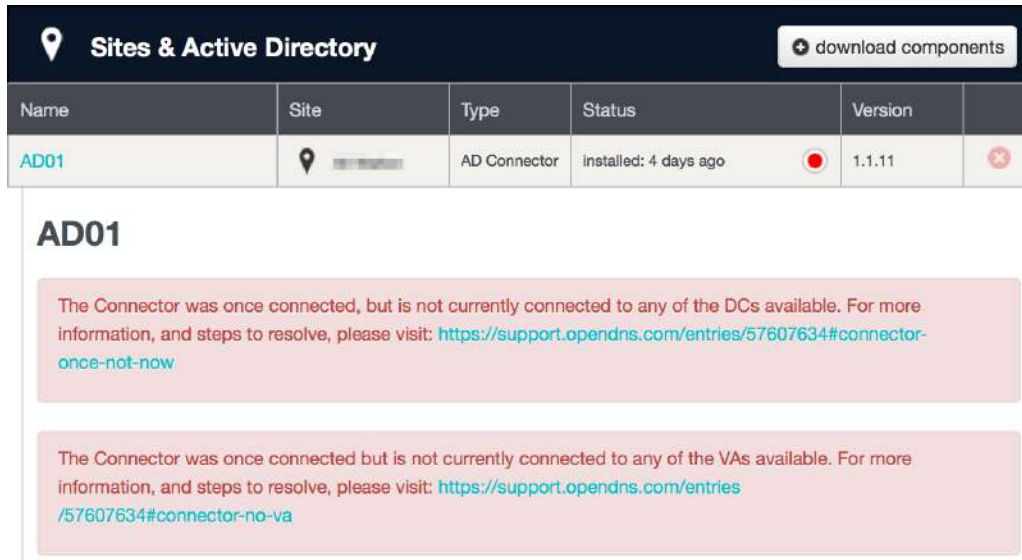

Sites & Active Directory download components

Name	Site	Type	Status	Version	
AD01		AD Connector	Installed: 4 days ago	1.1.11	

AD01

The Connector was once connected, but is not currently connected to any of the DCs available. For more information, and steps to resolve, please visit: <https://support.opendns.com/entries/57607634#connector-once-not-now>

The Connector was once connected but is not currently connected to any of the VAs available. For more information, and steps to resolve, please visit: <https://support.opendns.com/entries/57607634#connector-no-va>

For each AD Connector which cannot connect to a Domain Controller, or has an error/warning in the Dashboard, you should provide the AD Connector Log so Umbrella support can examine the findings.

Logs

To obtain the logs manually, follow the steps below:

- Attach the file C:\Program Files (x86)\OpenDNS\OpenDNS Connector\v1.x.x\OpenDNSAuditClient.log
- Attach the latest couple .zip log files from C:\Program Files (x86)\OpenDNS\OpenDNS Connector\v1.x.x\ to the support ticket (do not send more than 3 .zip files)
 - If the files are over 20MB, split them into two responses or contact us for upload details.

If working with a fresh configuration which has never worked, or if asked to send **new logs**:

- Stop the OpenDNS AD Connector service,
- Delete the file "C:\Program Files (x86)\OpenDNS\OpenDNS Connector\v1.x.x\OpenDNSAuditClient.log".
- Start the service up again.
- Wait 5 minutes and reply with this file.

This allows the file to be fresh and only with the most recent startup attempt.

CIDR Table

CIDR	SUBNET
0	0.0.0.0
1	128.0.0.0
2	192.0.0.0
3	224.0.0.0
4	240.0.0.0
5	248.0.0.0
6	252.0.0.0
7	254.0.0.0
8	255.0.0.0
9	255.128.0.0
10	255.192.0.0
11	255.224.0.0
12	255.240.0.0
13	255.248.0.0
14	255.252.0.0
15	255.254.0.0
16	255.255.0.0
17	255.255.128.0
18	255.255.192.0
19	255.255.224.0
20	255.255.240.0
21	255.255.248.0
22	255.255.252.0
23	255.255.254.0
24	255.255.255.0
25	255.255.255.128
26	255.255.255.192
27	255.255.255.224
28	255.255.255.240
29	255.255.255.248
30	255.255.255.252
31	255.255.255.254
32	255.255.255.255